




配光特性

図番 MR150183



カタログ番号	SS401		
使用ランプ	LED2W		
ランプ光束	122.0	lm	1,000
器具効率	100.0 %		
下方効率	85.8 %		
上方効率	14.2 %		
最大取付間隔			
A断面	1.14 H		
C断面			
B断面			

角度	光度
0°	35
10°	33
20°	30
30°	26
40°	23
50°	20
60°	16
70°	12
80°	8
90°	5
100°	4
110°	3
120°	3
130°	2
140°	2
150°	2
160°	2
170°	1
180°	0

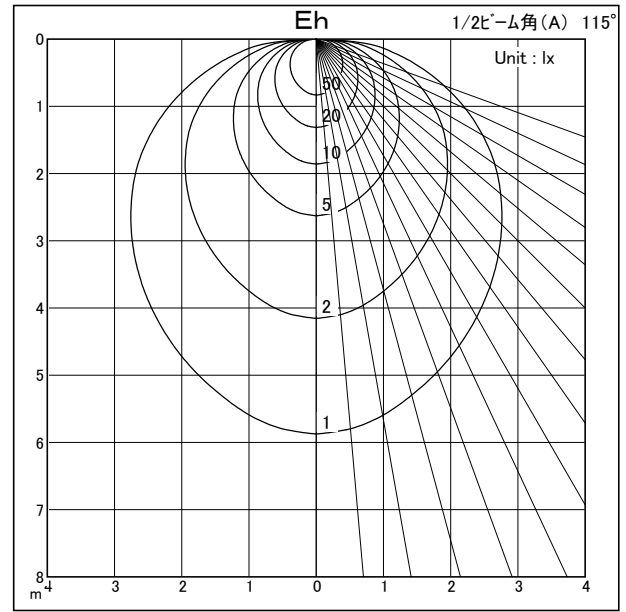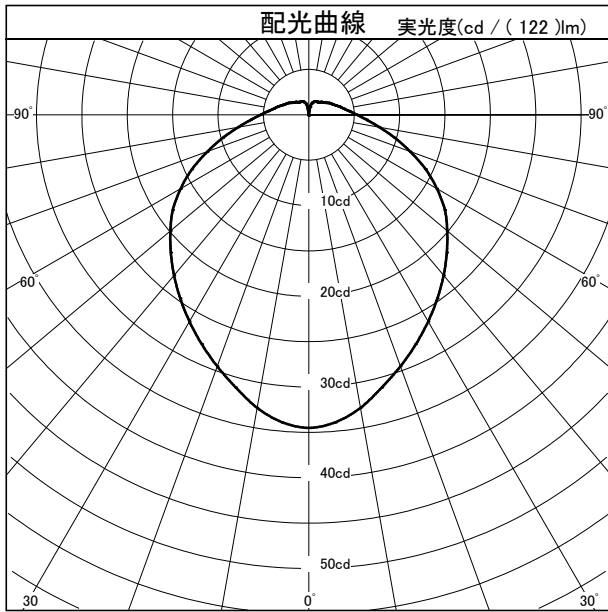

照明率表		平均照度=台数*照明率*保守率*122(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.35	0.27	0.21	0.33	0.26	0.21	0.31	0.24	0.20	0.29	0.23	0.19	0.17
	0.70	0.46	0.37	0.31	0.43	0.35	0.30	0.40	0.33	0.28	0.38	0.32	0.27	0.24
	1.00	0.58	0.49	0.42	0.55	0.47	0.41	0.51	0.44	0.39	0.48	0.42	0.37	0.34
	1.25	0.66	0.57	0.50	0.61	0.54	0.48	0.57	0.51	0.46	0.53	0.48	0.44	0.40
	1.50	0.72	0.63	0.56	0.67	0.59	0.54	0.62	0.56	0.51	0.58	0.53	0.48	0.45
指	2.00	0.80	0.72	0.65	0.74	0.68	0.62	0.69	0.64	0.59	0.64	0.60	0.56	0.51
	2.50	0.85	0.78	0.72	0.79	0.73	0.68	0.74	0.69	0.64	0.68	0.64	0.61	0.56
	3.00	0.89	0.83	0.77	0.83	0.77	0.73	0.77	0.72	0.68	0.71	0.68	0.65	0.60
	4.00	0.95	0.89	0.84	0.88	0.83	0.79	0.82	0.78	0.74	0.76	0.73	0.70	0.65
	5.00	0.98	0.93	0.89	0.91	0.87	0.84	0.84	0.81	0.78	0.78	0.76	0.74	0.68
数	7.00	1.03	0.99	0.95	0.95	0.92	0.89	0.88	0.86	0.83	0.82	0.80	0.78	0.72
	10.00	1.06	1.03	1.00	0.98	0.96	0.94	0.91	0.89	0.87	0.84	0.83	0.82	0.76