


# 配光特性

図番 MR150879





カタログ番号	X126CW		
オプション番号	3500K Ra85		
使用ランプ	XTM19803513CCA		
ランプ光束	1300.0	lm	1,000
最大光度	1881	cd	
1/2ビーム角			
A断面	39.00°		
C断面			
B断面			

X-series4.0 UNIVERSAL	角度	光度
	0°	1881
10°	1611	
20°	906	
30°	525	
40°	249	
50°	28	
60°	10	
70°	5	
80°	2	
90°	0	
100°	0	
110°	0	
120°	0	
130°	0	
140°	0	
150°	0	
160°	0	
170°	0	
180°	0	



断面

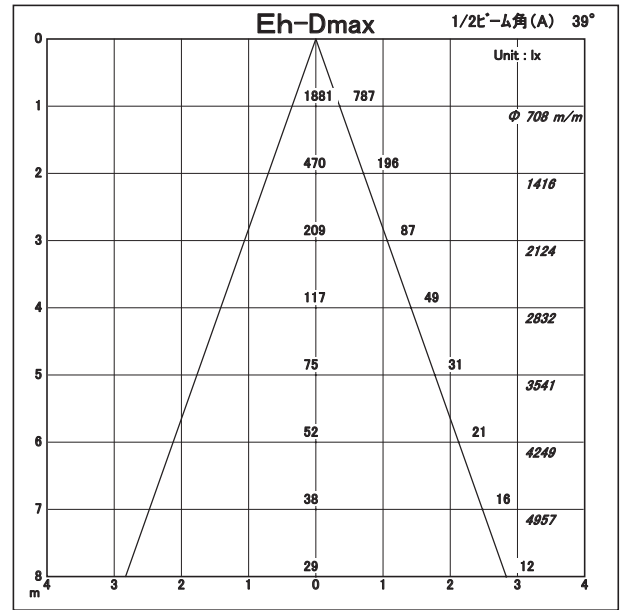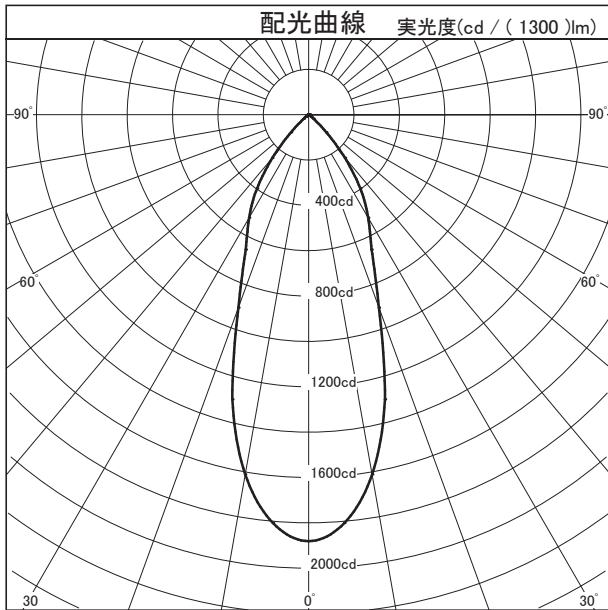

照明率表		平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.60	0.55	0.52	0.59	0.55	0.52	0.59	0.55	0.52	0.58	0.54	0.52	0.50
	0.70	0.71	0.66	0.62	0.70	0.65	0.62	0.69	0.65	0.62	0.68	0.64	0.61	0.60
	1.00	0.80	0.75	0.72	0.78	0.74	0.71	0.77	0.73	0.71	0.76	0.72	0.70	0.68
	1.25	0.85	0.80	0.77	0.83	0.79	0.76	0.81	0.78	0.75	0.79	0.77	0.74	0.73
	1.50	0.88	0.84	0.81	0.86	0.82	0.80	0.84	0.81	0.78	0.82	0.79	0.77	0.75
指	2.00	0.93	0.89	0.86	0.90	0.87	0.84	0.87	0.85	0.83	0.85	0.83	0.81	0.79
	2.50	0.95	0.92	0.89	0.92	0.90	0.87	0.90	0.87	0.85	0.87	0.85	0.84	0.81
	3.00	0.97	0.94	0.92	0.94	0.91	0.89	0.91	0.89	0.87	0.88	0.87	0.85	0.83
	4.00	1.00	0.97	0.95	0.96	0.94	0.93	0.93	0.91	0.90	0.90	0.89	0.88	0.85
数	5.00	1.01	0.99	0.98	0.98	0.96	0.94	0.94	0.93	0.92	0.91	0.90	0.89	0.86
	7.00	1.03	1.02	1.00	0.99	0.98	0.97	0.95	0.94	0.94	0.92	0.91	0.91	0.87
	10.00	1.05	1.04	1.03	1.00	1.00	0.99	0.97	0.96	0.95	0.93	0.92	0.92	0.89