


# 配光特性

図番 MR150427





カタログ番号	X138BF		
オプション番号	3000K Ra85		
使用ランプ	XTM19803013CCA		
ランプ光束	1300.0	lm	1,000
器具効率	83.0 %		
下方効率	77.8 %		
上方効率	5.2 %		
最大取付間隔			
A断面	0.51 H		
C断面			
B断面			

角度	光度
0°	2018
10°	1482
20°	731
30°	310
40°	135
50°	76
60°	46
70°	26
80°	11
90°	1
100°	9
110°	17
120°	18
130°	16
140°	11
150°	4
160°	0
170°	0
180°	0

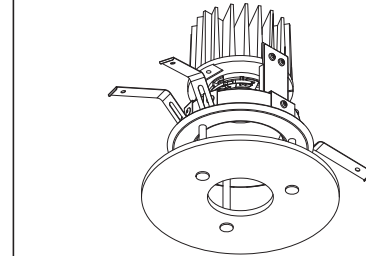

断面

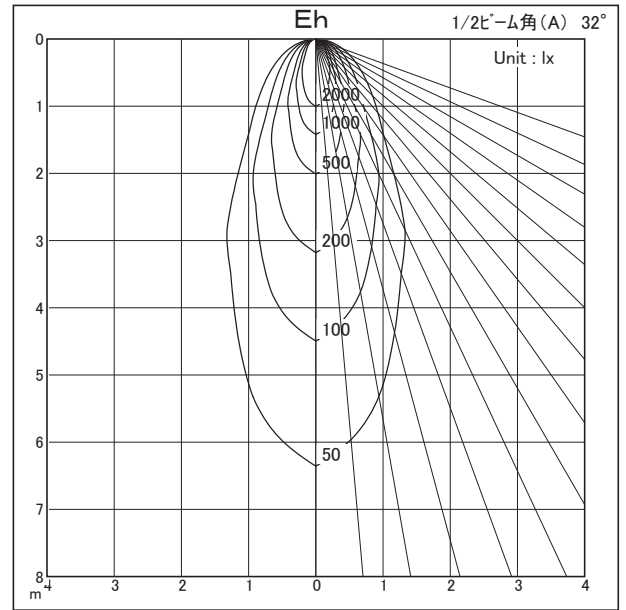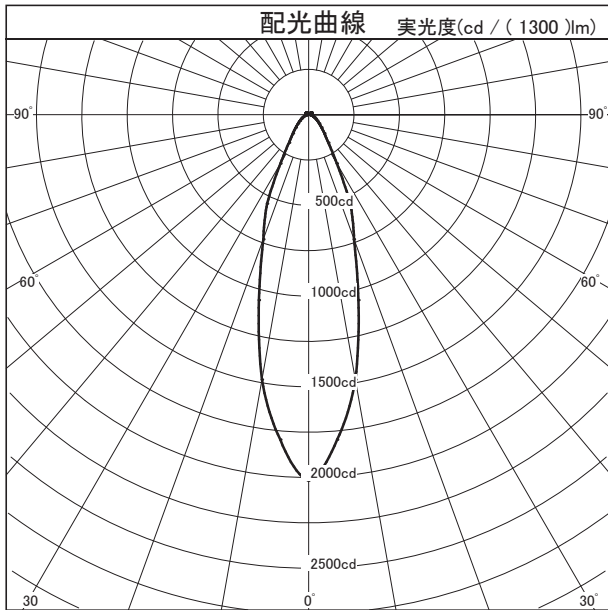

照明率表		平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.52	0.47	0.44	0.51	0.46	0.43	0.50	0.46	0.43	0.49	0.45	0.43	
	0.70	0.60	0.55	0.52	0.59	0.54	0.51	0.57	0.53	0.51	0.56	0.53	0.50	
	1.00	0.69	0.64	0.60	0.66	0.62	0.59	0.64	0.61	0.58	0.63	0.60	0.57	
	1.25	0.73	0.68	0.65	0.70	0.67	0.64	0.68	0.65	0.62	0.66	0.63	0.61	
	1.50	0.76	0.72	0.69	0.73	0.70	0.67	0.71	0.68	0.65	0.68	0.66	0.64	
	指	2.00	0.81	0.77	0.74	0.77	0.74	0.72	0.74	0.72	0.70	0.71	0.69	0.68
		2.50	0.84	0.80	0.77	0.80	0.77	0.75	0.77	0.74	0.72	0.73	0.72	0.70
		3.00	0.86	0.82	0.80	0.82	0.79	0.77	0.78	0.76	0.74	0.75	0.73	0.72
		4.00	0.88	0.86	0.84	0.84	0.82	0.80	0.80	0.79	0.77	0.77	0.75	0.74
		5.00	0.90	0.88	0.86	0.86	0.84	0.82	0.81	0.80	0.79	0.78	0.77	0.76
数	7.00	0.92	0.90	0.89	0.87	0.86	0.85	0.83	0.82	0.81	0.79	0.78	0.77	
	10.00	0.94	0.92	0.91	0.89	0.88	0.87	0.84	0.83	0.83	0.80	0.79	0.79	