



配光特性

図番 20.12.2017



カタログ番号	J-619W	
オプション番号	4000K 34° + 15°	
使用ランプ	LED 17W	
ランプ光束	1560.0	lm <small>1.000</small>
器具効率	100.0 %	
下方効率	99.9 %	
上方効率	0.1 %	
最大取付間隔		
A断面	0.29 H	
C断面	0.36 H	
B断面	0.56 H	

RIDE LENS RECESSED	角度	光度
	0°	6965
	10°	2614
	20°	587
	30°	124
	40°	35
	50°	18
	60°	15
	70°	10
	80°	10
	90°	10
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

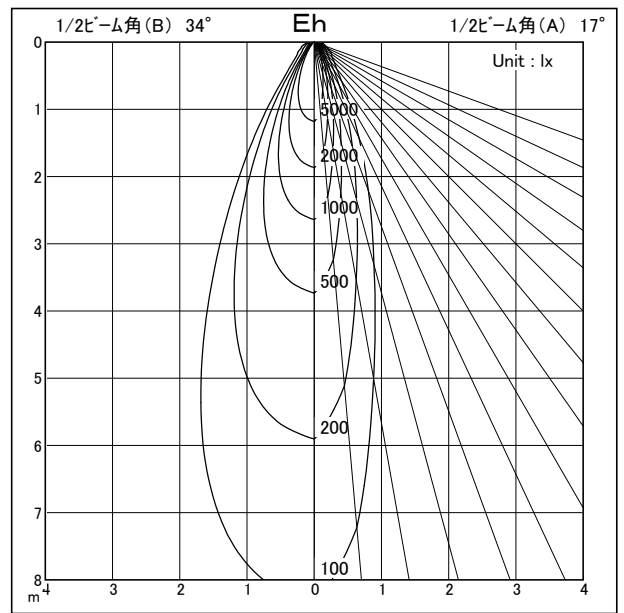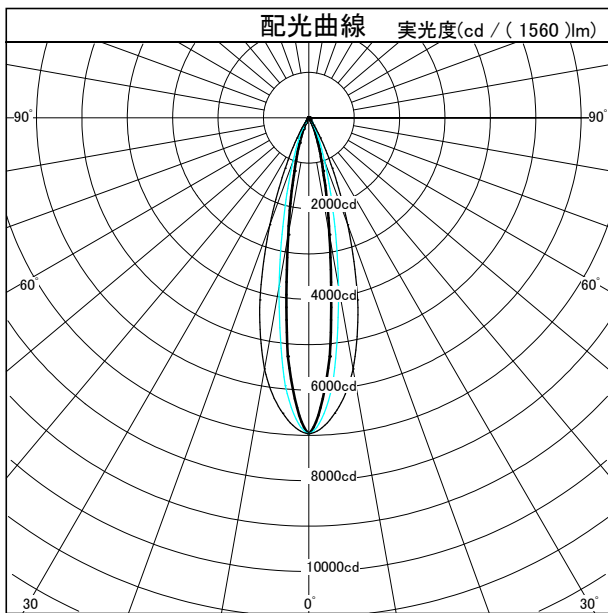

照明率表		平均照度=台数 * 照明率 * 保守率 * 1560 (光束) / (間口 * 奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.85	0.81	0.78	0.85	0.81	0.78	0.84	0.80	0.78	0.83	0.80	0.78	0.77
	0.70	0.93	0.89	0.86	0.92	0.88	0.85	0.91	0.87	0.85	0.90	0.87	0.84	0.83
	1.00	1.00	0.96	0.93	0.98	0.95	0.92	0.97	0.94	0.91	0.95	0.92	0.90	0.89
	1.25	1.04	1.00	0.97	1.02	0.98	0.95	1.00	0.97	0.94	0.98	0.95	0.93	0.92
	1.50	1.07	1.03	1.00	1.04	1.01	0.98	1.02	0.99	0.97	1.00	0.97	0.95	0.93
指	2.00	1.10	1.07	1.04	1.07	1.04	1.02	1.04	1.02	1.00	1.02	1.00	0.98	0.96
	2.50	1.13	1.09	1.07	1.09	1.07	1.04	1.06	1.04	1.02	1.03	1.01	1.00	0.97
	3.00	1.14	1.11	1.09	1.11	1.08	1.06	1.07	1.05	1.04	1.04	1.02	1.01	0.98
	4.00	1.17	1.14	1.12	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.03	1.00
	5.00	1.18	1.16	1.14	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.01
数	7.00	1.20	1.18	1.17	1.15	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.02
	10.00	1.21	1.20	1.19	1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.07	1.06	1.03