

配光特性

図番 20160515





カタログ番号	T125DW		
オプション番号	4000K Ra95		
使用ランプ	XTM19954013CCA		
ランプ光束	1300.0	lm	1.000
最大光度	3268.5 cd		
1/2ビーム角			
A断面	22.00 °		
C断面			
B断面			

角度	光度
0°	3269
10°	1795
20°	788
30°	391
40°	66
50°	4
60°	4
70°	2
80°	1
90°	1
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

X-SERIES SPOTLIGHT 4.0

断面

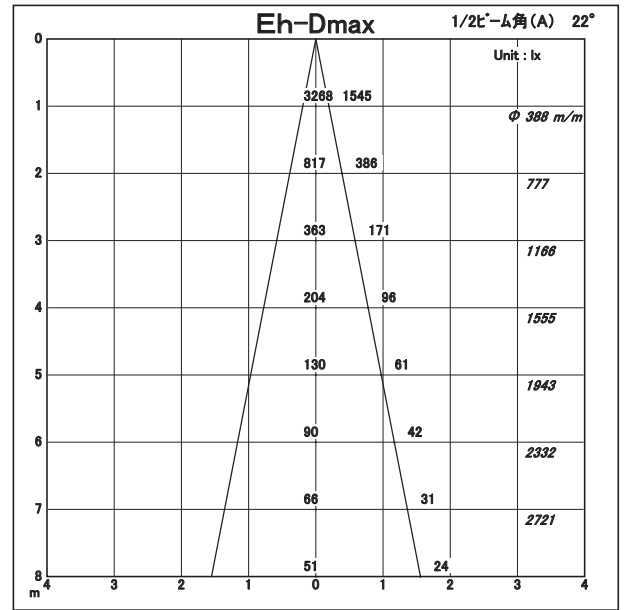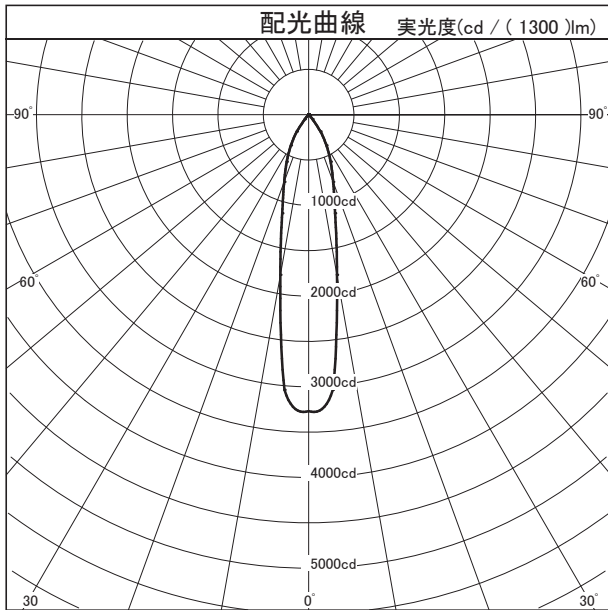

照明率表		平均照度=台数*照明率*保守率*1300(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.58	0.54	0.52	0.57	0.54	0.52	0.57	0.54	0.52	0.56	0.54	0.52	0.51
	0.70	0.65	0.61	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.62	0.60	0.58	0.57
	1.00	0.71	0.68	0.65	0.70	0.67	0.65	0.69	0.66	0.64	0.67	0.65	0.64	0.62
	1.25	0.74	0.71	0.69	0.73	0.70	0.68	0.71	0.69	0.67	0.70	0.68	0.66	0.65
	1.50	0.76	0.73	0.71	0.75	0.72	0.70	0.73	0.71	0.69	0.71	0.70	0.68	0.67
指	2.00	0.79	0.77	0.75	0.77	0.75	0.73	0.75	0.73	0.72	0.73	0.72	0.71	0.69
	2.50	0.81	0.79	0.77	0.79	0.77	0.75	0.77	0.75	0.74	0.74	0.73	0.72	0.70
	3.00	0.83	0.80	0.79	0.80	0.78	0.77	0.77	0.76	0.75	0.75	0.74	0.73	0.71
	4.00	0.84	0.83	0.81	0.81	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.75	0.72
	5.00	0.86	0.84	0.83	0.82	0.81	0.80	0.79	0.79	0.78	0.77	0.76	0.75	0.73
数	7.00	0.87	0.86	0.85	0.83	0.83	0.82	0.80	0.80	0.79	0.77	0.77	0.76	0.74
	10.00	0.88	0.87	0.86	0.84	0.84	0.83	0.81	0.81	0.80	0.78	0.78	0.77	0.75