




配光特性

図番 MR140427



カタログ番号	T505CW		
オプション番号	3500K Ra85		
使用ランプ	BLM-1120-35853		
ランプ光束	2200.0	lm	1.000
最大光度	3062.8 cd		
1/2ビーム角			
A断面	31.00 °		
C断面			
B断面			

G.E.M. 100 SPOT	角度	光度
		0°
	10°	2217
	20°	961
	30°	187
	40°	9
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
	180°	0

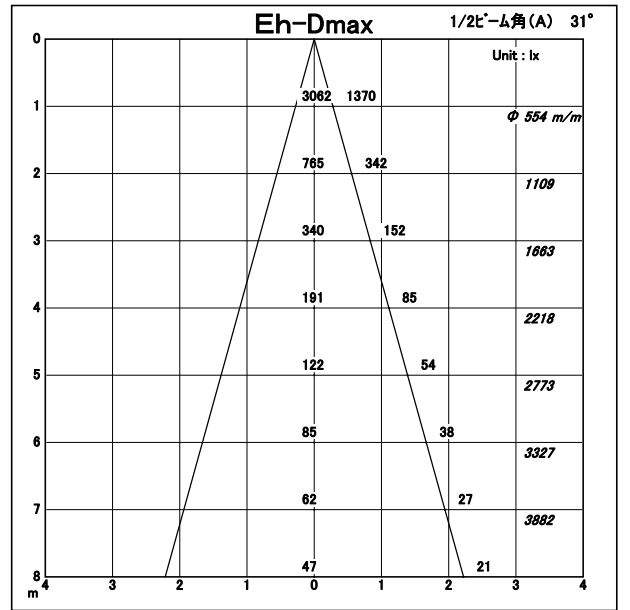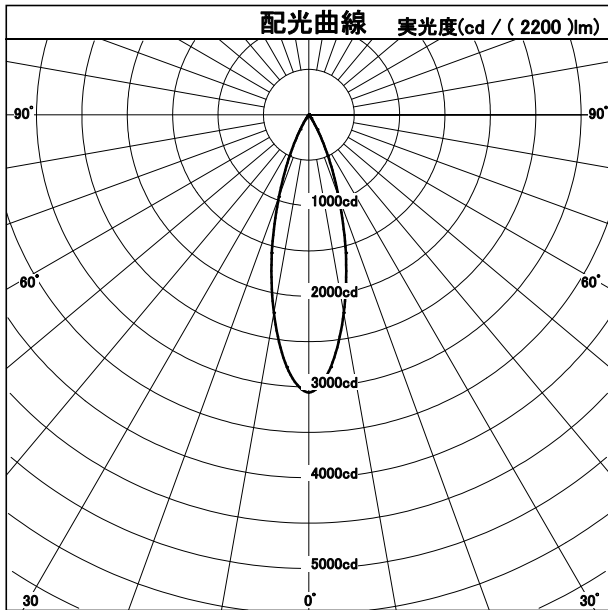

照明率表		平均照度=台数 * 照明率 * 保守率 * 2200 (光束) / (間口 * 奥行)											
床面反射率(%)		20											
天井面反射率(%)		80			60			40			20		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.35	0.34	0.32	0.35	0.33	0.32	0.35	0.33	0.32	0.34	0.33	0.32
	0.70	0.39	0.37	0.36	0.38	0.37	0.36	0.38	0.36	0.35	0.37	0.36	0.35
	1.00	0.42	0.40	0.39	0.41	0.39	0.38	0.40	0.39	0.38	0.40	0.39	0.38
	1.25	0.43	0.42	0.40	0.42	0.41	0.40	0.41	0.40	0.39	0.41	0.40	0.39
	1.50	0.44	0.43	0.42	0.43	0.42	0.41	0.42	0.41	0.40	0.41	0.41	0.40
指	2.00	0.46	0.44	0.43	0.44	0.43	0.42	0.43	0.42	0.42	0.42	0.42	0.41
	2.50	0.47	0.45	0.44	0.45	0.44	0.43	0.44	0.43	0.43	0.43	0.42	0.42
	3.00	0.47	0.46	0.45	0.46	0.45	0.44	0.44	0.44	0.43	0.43	0.43	0.42
	4.00	0.48	0.47	0.46	0.46	0.46	0.45	0.45	0.44	0.44	0.44	0.43	0.43
	5.00	0.49	0.48	0.47	0.47	0.46	0.46	0.45	0.45	0.44	0.44	0.43	0.43
数	7.00	0.49	0.49	0.48	0.47	0.47	0.47	0.46	0.45	0.45	0.44	0.44	0.44
	10.00	0.50	0.49	0.49	0.48	0.48	0.47	0.46	0.46	0.46	0.44	0.44	0.44