




配光特性

図番 MR190165



カタログ番号	YT01V	
オプション番号	YZ014 3500K	
使用ランプ	LED15W	
ランプ光束	500.0	lm <small>1.000</small>
器具効率	100.4 %	
下方効率	100.3 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		

角度	光度
0°	1631
10°	1273
20°	503
30°	112
40°	31
50°	11
60°	4
70°	1
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

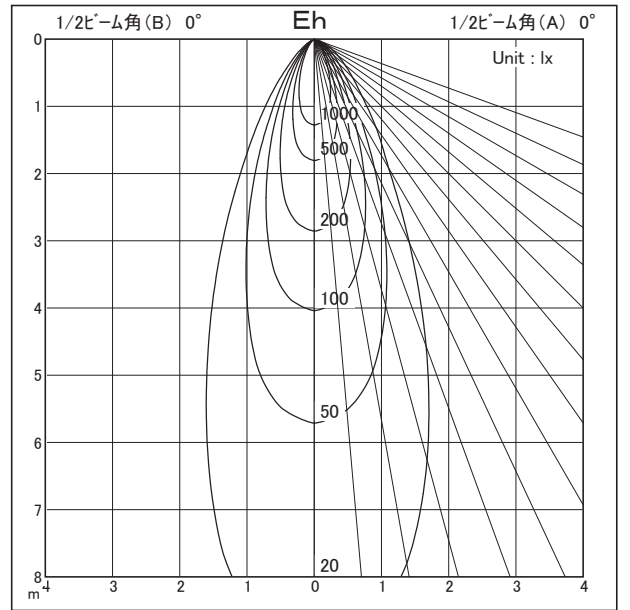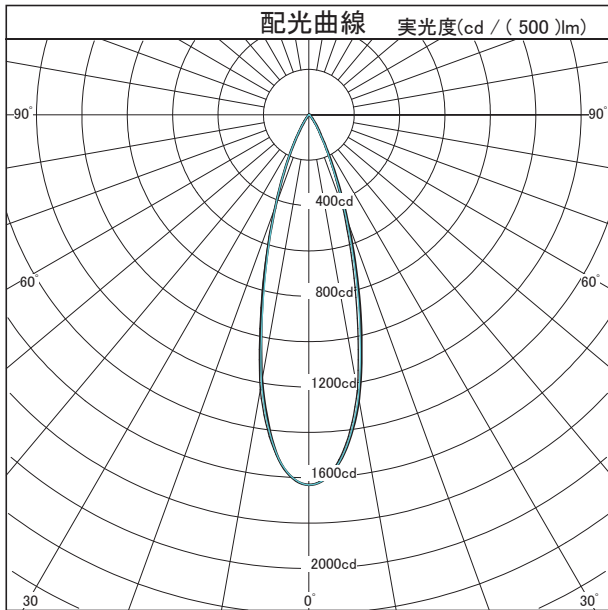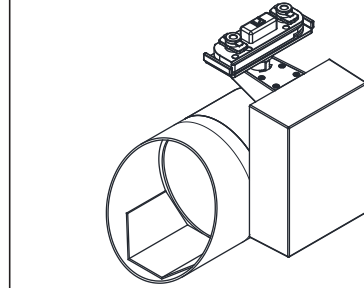

壁面照度分布						単灯						連灯						
(m)						(m)						(m)						
0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00						0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00						0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00						
0.50	16	6	1			0.50	18	11	18			0.50	18	11	18			
1.00	87	27	4	1		1.00	96	54	96			1.00	96	54	96			
1.50	166	68	10	2		1.50	186	139	186			1.50	186	139	186			
2.00	130	74	15	3	1	2.00	162	154	162			2.00	162	154	162			
2.50	82	57	18	4	1	2.50	120	124	120			2.50	120	124	120			
3.00	51	39	17	5	1	3.00	87	89	87			3.00	87	89	87			
3.50	32	26	13	5	2	1	3.50	62	63	62			3.50	62	63	62		

壁面からの距離：1.0m 器具間隔：1.0m 保守率：1.0 照射振角20° 単位：lx