

配光特性


図番 MR150298





カタログ番号	YT31BB+YZ313B		
オプション番号			
使用ランプ	VLM-0513-35973-000		
ランプ光束	766.0	lm	1.000
最大光度	8307.3 cd		
1/2ビーム角			
A断面	12.60 °		
C断面			
B断面			

角度	光度
0°	8307
10°	2229
20°	438
30°	28
40°	5
50°	0
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

VIO MUSEUM SPOT NARROW



断面

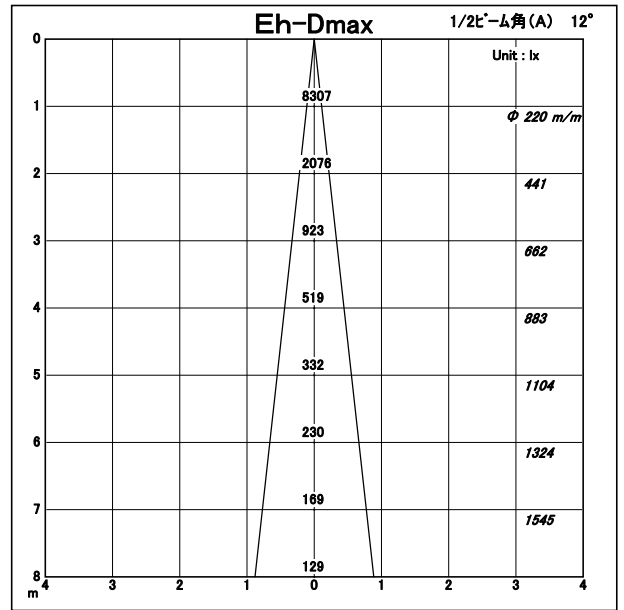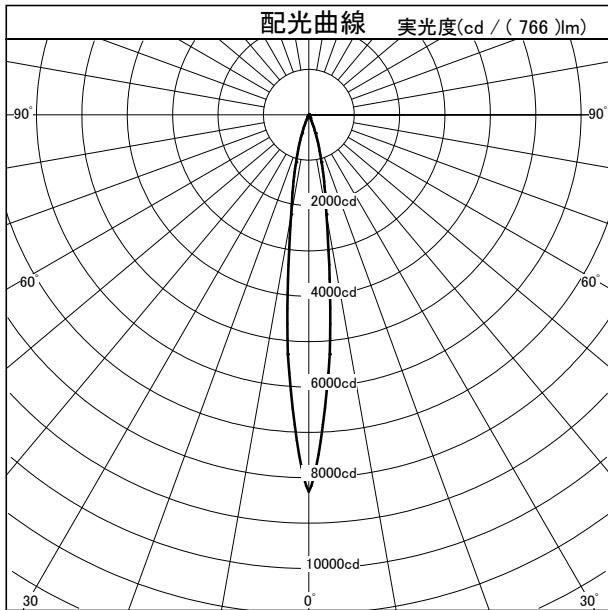

照明率表		平均照度=台数*照明率*保守率*766(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.96	0.93	0.91	0.95	0.92	0.91	0.95	0.92	0.91	0.94	0.92	0.90	0.90
	0.70	1.00	0.97	0.95	0.99	0.97	0.95	0.98	0.96	0.94	0.97	0.95	0.94	0.93
	1.00	1.05	1.02	0.99	1.03	1.00	0.98	1.02	0.99	0.98	1.00	0.98	0.97	0.96
	1.25	1.07	1.04	1.02	1.05	1.02	1.01	1.03	1.01	0.99	1.01	1.00	0.98	0.97
	1.50	1.09	1.06	1.04	1.06	1.04	1.02	1.04	1.02	1.01	1.02	1.01	0.99	0.98
指	2.00	1.11	1.09	1.06	1.08	1.06	1.04	1.06	1.04	1.03	1.03	1.02	1.01	0.99
	2.50	1.13	1.10	1.08	1.10	1.08	1.06	1.07	1.05	1.04	1.04	1.03	1.02	0.99
	3.00	1.14	1.12	1.10	1.10	1.09	1.07	1.07	1.06	1.05	1.04	1.03	1.02	1.00
	4.00	1.16	1.14	1.12	1.12	1.10	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.01
	5.00	1.17	1.15	1.14	1.12	1.11	1.10	1.09	1.08	1.07	1.05	1.04	1.04	1.01
数	7.00	1.18	1.17	1.16	1.13	1.12	1.12	1.09	1.09	1.08	1.05	1.05	1.04	1.01
	10.00	1.19	1.18	1.17	1.14	1.13	1.13	1.10	1.09	1.09	1.06	1.05	1.05	1.01