

# 配光特性


図番 MR150300





カタログ番号	YT31BB+YZ314B		
オプション番号			
使用ランプ	VLM-0513-35973-000		
ランプ光束	916.0	lm	1.000
最大光度	3626.6 cd		
1/2ビーム角			
A断面	26.00 °		
C断面			
B断面			

角度	光度
0°	3627
10°	2398
20°	891
30°	93
40°	15
50°	4
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

VIO MUSEUM SPOT FLOOD



断面

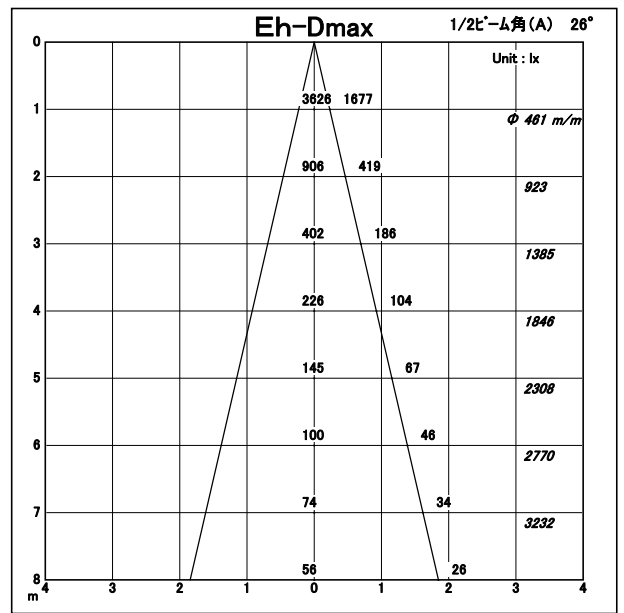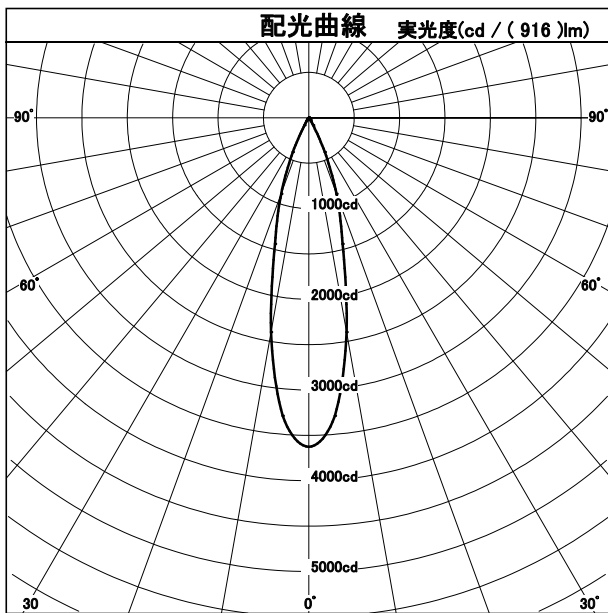

照明率表		平均照度=台数 * 照明率 * 保守率 * 916 (光束) / (間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.85	0.81	0.79	0.84	0.81	0.79	0.84	0.81	0.79	0.83	0.80	0.78	0.77
	0.70	0.92	0.89	0.86	0.91	0.88	0.86	0.90	0.87	0.85	0.89	0.87	0.85	0.84
	1.00	0.99	0.95	0.92	0.97	0.94	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.89
	1.25	1.02	0.99	0.96	1.00	0.97	0.95	0.98	0.96	0.94	0.97	0.94	0.93	0.91
	1.50	1.05	1.01	0.99	1.02	0.99	0.97	1.00	0.98	0.96	0.98	0.96	0.95	0.93
指	2.00	1.08	1.05	1.02	1.05	1.02	1.00	1.02	1.00	0.99	1.00	0.98	0.97	0.95
	2.50	1.10	1.07	1.05	1.07	1.04	1.03	1.04	1.02	1.00	1.01	1.00	0.98	0.96
	3.00	1.11	1.09	1.07	1.08	1.06	1.04	1.05	1.03	1.02	1.02	1.00	0.99	0.97
	4.00	1.13	1.11	1.10	1.09	1.08	1.06	1.06	1.05	1.03	1.03	1.02	1.01	0.98
	5.00	1.15	1.13	1.11	1.10	1.09	1.08	1.07	1.06	1.05	1.03	1.02	1.02	0.98
数	7.00	1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.07	1.06	1.04	1.03	1.03	0.99
	10.00	1.17	1.16	1.15	1.13	1.12	1.11	1.08	1.08	1.07	1.04	1.04	1.03	1.00