





配光特性

図番 MR150450



カタログ番号	YT31BB	
オプション番号	YZ315B 3000K Ra95	
使用ランプ		
ランプ光束	1200.0	lm <small>1.000</small>
器具効率	49.9 %	
下方効率	49.9 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		

spot wallwasher	角度	光度
	0°	
10°		924
20°		491
30°		236
40°		132
50°		73
60°		24
70°		1
80°		0
90°		0
100°		0
110°		0
120°		0
130°		0
140°		0
150°		0
160°		0
170°		0
180°		0

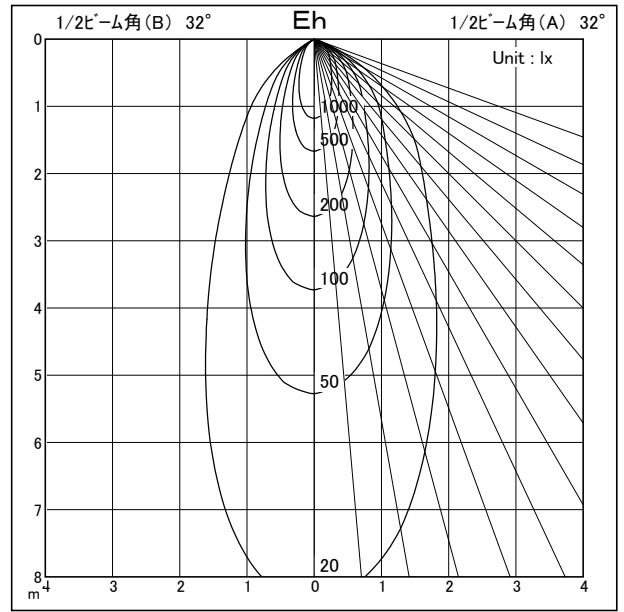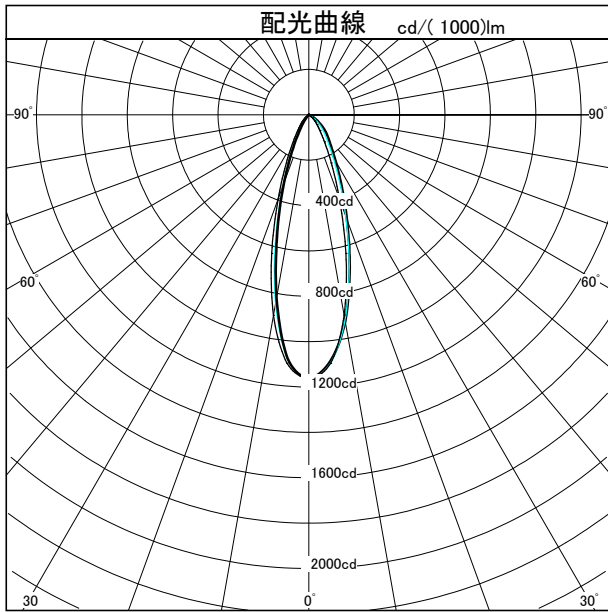

(m)	0.50	1.00	1.50	2.00	2.50	3.00
0.50	71	30	4			
1.00	100	53	16	4	1	
1.50	112	63	19	6	2	
2.00	92	59	20	6	3	1
2.50	63	46	19	7	3	1
3.00	42	34	17	7	3	1
3.50	29	24	14	6	3	1

壁面からの距離：1.0m 器具間隔：1.0m 保守率：1.0

(m)	0.50	1.00	1.50	2.00	2.50	3.00	3.50
0.50	79	60	79				
1.00	133	114	133				
1.50	153	140	153				
2.00	137	134	137				
2.50	108	109	108				
3.00	83	84	83				
3.50	64	64	64				

単位：lx (m)