




# 配光特性

図番 MR150450



カタログ番号	YT31BW	
オプション番号	YZ315W 3000K Ra95	
使用ランプ		
ランプ光束	1200.0	lm <small>1.000</small>
器具効率	49.9 %	
下方効率	49.9 %	
上方効率	0.0 %	
最大取付間隔		
A断面		
C断面		
B断面		

spot wallwasher	角度	光度
	0°	
10°		924
20°		491
30°		236
40°		132
50°		73
60°		24
70°		1
80°		0
90°		0
100°		0
110°		0
120°		0
130°		0
140°		0
150°		0
160°		0
170°		0
180°		0

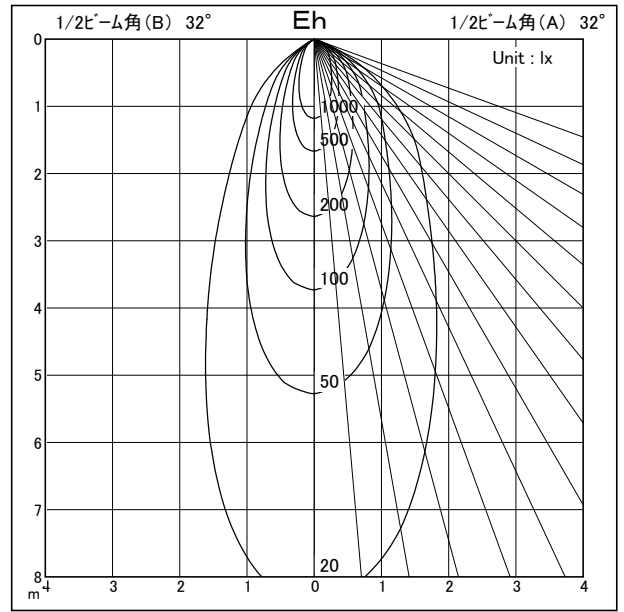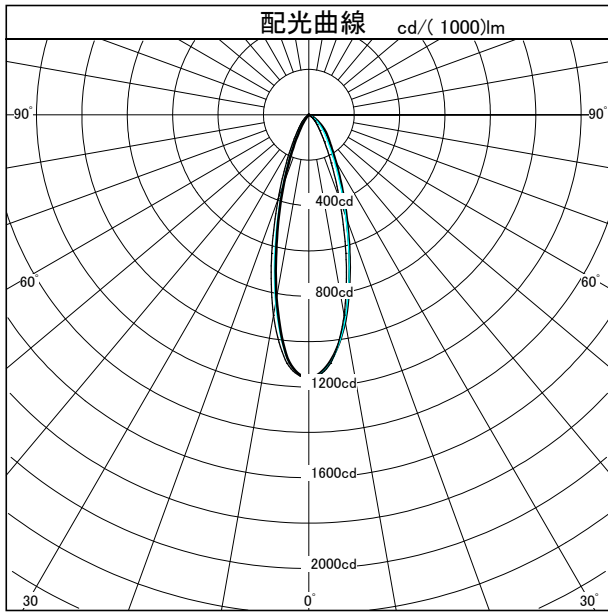

壁面照度分布							単灯							連灯						
(m)							(m)							(m)						
0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00							0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00							0.50 — 1.00 — 1.50 — 2.00 — 2.50 — 3.00						
0.50	71	30	4				0.50	79	60	79				0.50	79	60	79			
1.00	100	53	16	4	1		1.00	133	114	133				1.00	133	114	133			
1.50	112	63	19	6	2		1.50	153	140	153				1.50	153	140	153			
2.00	92	59	20	6	3	1	2.00	137	134	137				2.00	137	134	137			
2.50	63	46	19	7	3	1	2.50	108	109	108				2.50	108	109	108			
3.00	42	34	17	7	3	1	3.00	83	84	83				3.00	83	84	83			
3.50	29	24	14	6	3	1	3.50	64	64	64				3.50	64	64	64			

壁面からの距離：1.0m 器具間隔：1.0m 保守率：1.0  
単位：lx