

# 配光特性

図番 MR140670





カタログ番号	T1106		
オプション番号	3000K Ra90		
使用ランプ	LXZ2-3090		
ランプ光束	94.0	lm	1.000
最大光度	330.3 cd		
1/2ビーム角			
A断面	20.00 °		
C断面			
B断面			

角度	光度
0°	330
10°	165
20°	51
30°	5
40°	3
50°	1
60°	1
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

LED JACK SPOT PIPI

断面

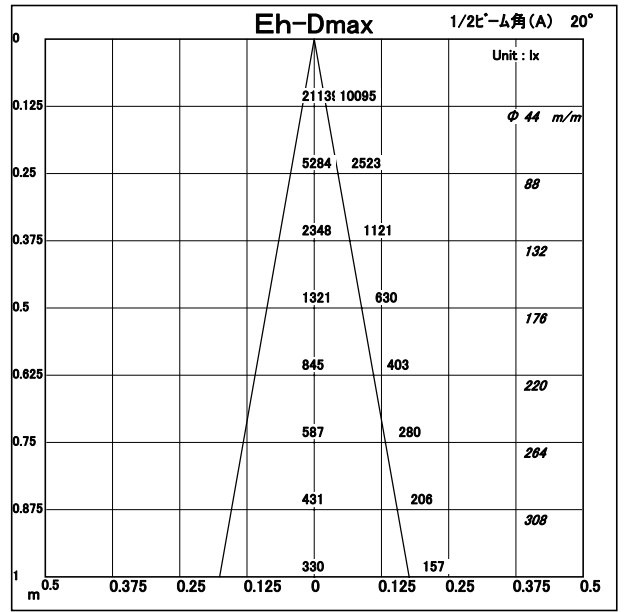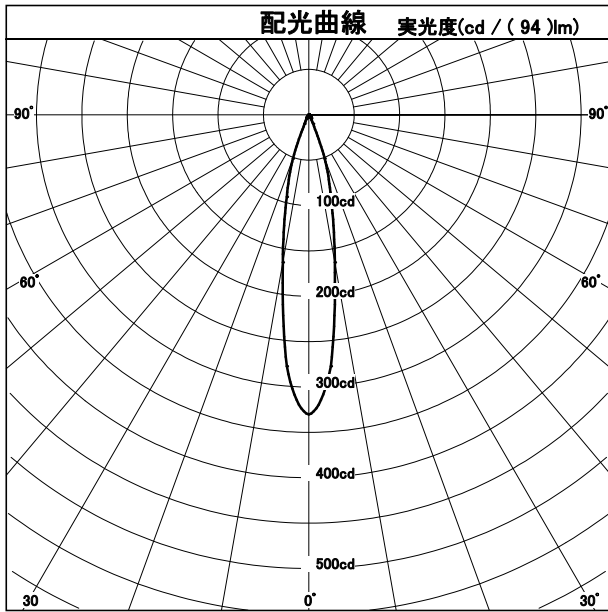

照明率表		平均照度=台数 * 照明率 * 保守率 * 94 (光束) / (間口 * 奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.57	0.54	0.53	0.56	0.54	0.52	0.56	0.54	0.52	0.55	0.54	0.52	0.52
	0.70	0.61	0.58	0.57	0.60	0.58	0.56	0.59	0.58	0.56	0.59	0.57	0.56	0.55
	1.00	0.65	0.62	0.61	0.64	0.62	0.60	0.63	0.61	0.60	0.62	0.60	0.59	0.58
	1.25	0.67	0.65	0.63	0.66	0.64	0.62	0.64	0.63	0.61	0.63	0.62	0.61	0.60
	1.50	0.68	0.66	0.64	0.67	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.61
指	2.00	0.70	0.68	0.67	0.69	0.67	0.66	0.67	0.66	0.64	0.65	0.64	0.63	0.62
	2.50	0.72	0.70	0.69	0.70	0.68	0.67	0.68	0.67	0.66	0.66	0.65	0.64	0.63
	3.00	0.73	0.71	0.70	0.70	0.69	0.68	0.68	0.67	0.66	0.66	0.66	0.65	0.63
	4.00	0.74	0.73	0.72	0.72	0.70	0.70	0.69	0.68	0.68	0.67	0.66	0.66	0.64
	5.00	0.75	0.74	0.73	0.72	0.71	0.70	0.70	0.69	0.68	0.67	0.67	0.66	0.64
数	7.00	0.76	0.75	0.74	0.73	0.72	0.72	0.70	0.70	0.69	0.68	0.67	0.67	0.65
	10.00	0.77	0.76	0.75	0.74	0.73	0.73	0.71	0.70	0.70	0.68	0.68	0.68	0.65