

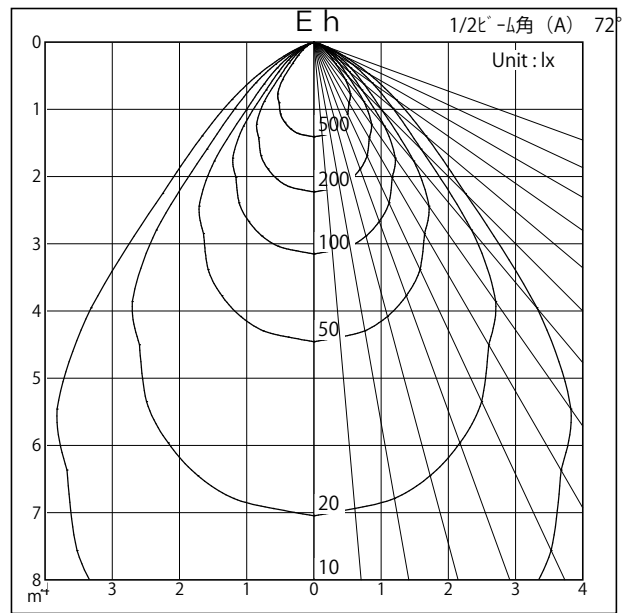


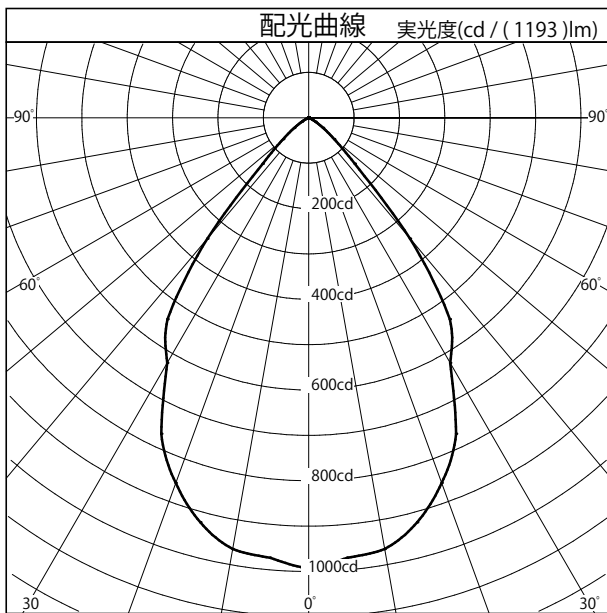

カタログ番号	L4281B		
オプション番号	3000K		
使用ランプ	LED 8W		
ランプ光束	1193.0	lm	1.000
器具効率	100.0 %		
下方効率	100.0 %		
上方効率	0.0 %		
最大取付間隔			
A 断面	1.03 H		
C 断面			
B 断面			

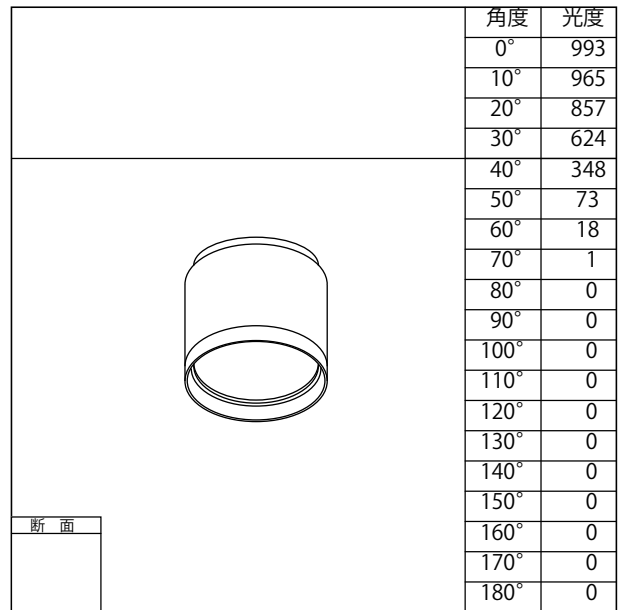

照明率表		平均照度=台数*照明率*保守率*1193(光束)/(間口*奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.58	0.52	0.48	0.57	0.51	0.47	0.56	0.51	0.47	0.55	0.51	0.47	0.46
	0.70	0.72	0.65	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.68	0.63	0.60	0.58
	1.00	0.84	0.78	0.73	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70
	1.25	0.90	0.84	0.80	0.88	0.83	0.79	0.85	0.81	0.78	0.84	0.80	0.77	0.75
	1.50	0.94	0.89	0.85	0.92	0.87	0.84	0.89	0.85	0.82	0.87	0.84	0.81	0.79
指	2.00	1.00	0.95	0.91	0.97	0.93	0.90	0.94	0.91	0.88	0.91	0.89	0.86	0.84
	2.50	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.87
	3.00	1.05	1.02	0.99	1.02	0.99	0.96	0.98	0.96	0.94	0.95	0.93	0.92	0.89
	4.00	1.09	1.06	1.03	1.05	1.02	1.00	1.01	0.99	0.98	0.98	0.96	0.95	0.92
	5.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.98	0.97	0.93
数	7.00	1.13	1.11	1.09	1.08	1.07	1.06	1.04	1.03	1.02	1.01	1.00	0.99	0.95
	10.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.97