



# 配光特性

図番 YL230205



カタログ番号	K4619(B・W)	
	3000K Ra80	
使用ランプ	LED 15.8W	
器具光束	1448.0 lm <small>1,000</small>	
下方効率	50.0 %	
上方効率	50.0 %	
最大取付間隔	下方向	上方向
A断面	0.33 H	0.33 H
C断面		
B断面		

	角度	光度
	0°	2931
	10°	1422
	20°	528
	30°	321
	40°	19
	50°	7
	60°	2
	70°	1
	80°	0
	90°	0
	100°	0
	110°	1
	120°	2
	130°	7
	140°	19
	150°	321
	160°	528
170°	1422	
180°	2931	

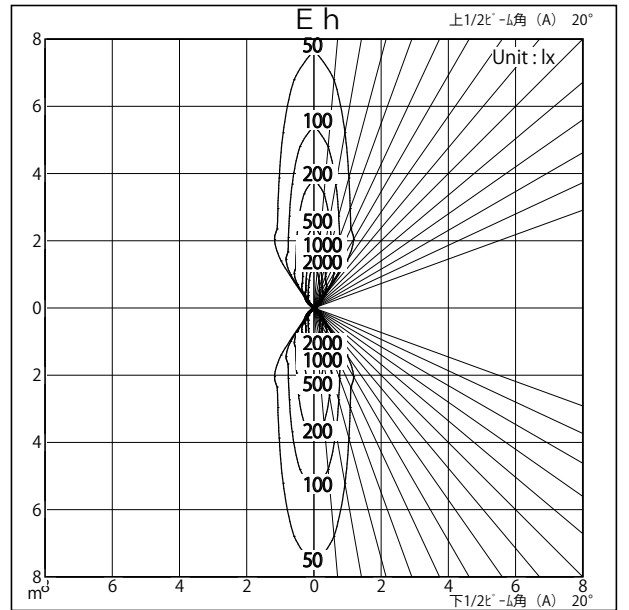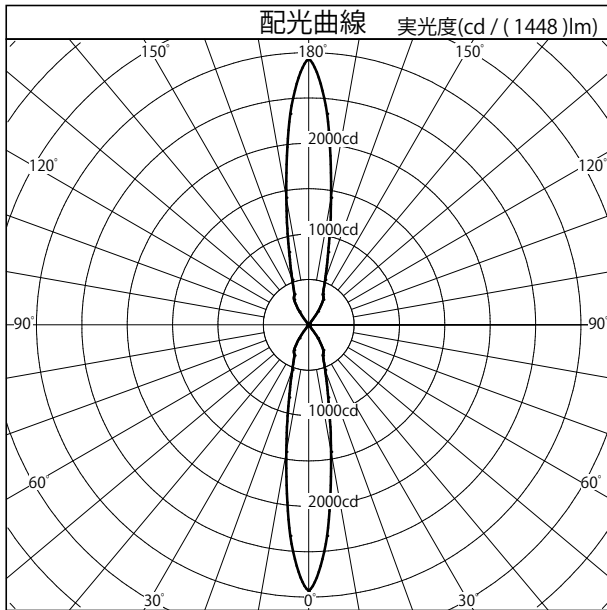

照明率表		平均照度=台数×照明率×保守率×1448(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.54	0.48	0.44	0.49	0.45	0.42	0.45	0.42	0.40	0.41	0.39	0.37	0.35
	0.70	0.63	0.57	0.53	0.57	0.53	0.49	0.52	0.48	0.46	0.46	0.44	0.42	0.39
	1.00	0.72	0.67	0.62	0.65	0.60	0.57	0.57	0.54	0.52	0.51	0.49	0.47	0.42
	1.25	0.78	0.72	0.68	0.69	0.65	0.61	0.61	0.58	0.55	0.53	0.51	0.50	0.44
	1.50	0.82	0.76	0.72	0.72	0.68	0.65	0.63	0.60	0.58	0.54	0.53	0.51	0.45
指	2.00	0.87	0.82	0.78	0.76	0.73	0.70	0.66	0.64	0.62	0.56	0.55	0.54	0.46
	2.50	0.91	0.86	0.83	0.79	0.76	0.73	0.68	0.66	0.64	0.58	0.56	0.55	0.47
	3.00	0.93	0.89	0.86	0.81	0.78	0.75	0.69	0.67	0.66	0.58	0.57	0.56	0.47
	4.00	0.97	0.93	0.90	0.83	0.81	0.79	0.71	0.69	0.68	0.60	0.59	0.58	0.48
	5.00	0.99	0.96	0.93	0.85	0.83	0.81	0.72	0.71	0.70	0.60	0.60	0.59	0.49
数	7.00	1.01	0.99	0.97	0.87	0.85	0.84	0.73	0.72	0.72	0.61	0.61	0.60	0.49
	10.00	1.03	1.02	1.00	0.88	0.87	0.86	0.74	0.74	0.73	0.62	0.61	0.61	0.50