



# 配光特性

図番 YL230206



カタログ番号	K4620(B・W)	
	3000K Ra80	
使用ランプ	LED 7.8W	
器具光束	620.0 lm <sub>1,000</sub>	
下方効率	50.0 %	
上方効率	50.0 %	
最大取付間隔	下方向	上方向
A断面	0.27 H	0.27 H
C断面		
B断面		

	角度	光度
	0°	1606
	10°	537
	20°	196
	30°	152
	40°	13
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	1
	140°	13
	150°	152
	160°	196
170°	537	
180°	1606	

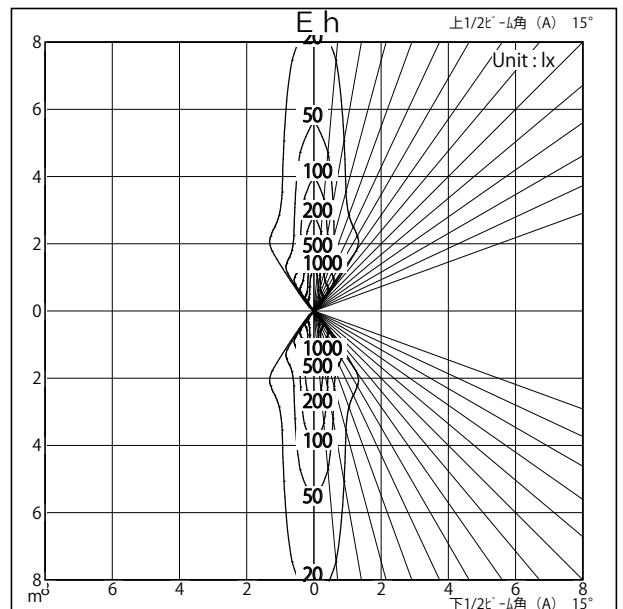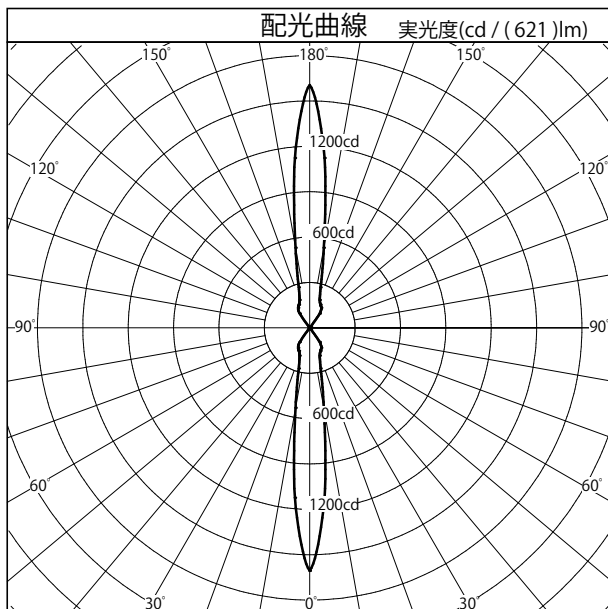

照明率表		平均照度=台数*照明率*保守率*621(光束)/(間口*奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.53	0.47	0.44	0.49	0.44	0.41	0.45	0.41	0.39	0.41	0.38	0.37	0.34
	0.70	0.63	0.57	0.52	0.57	0.52	0.49	0.51	0.48	0.45	0.46	0.44	0.42	0.38
	1.00	0.72	0.66	0.62	0.64	0.60	0.57	0.57	0.54	0.52	0.50	0.48	0.47	0.42
	1.25	0.77	0.72	0.67	0.69	0.64	0.61	0.60	0.58	0.55	0.53	0.51	0.49	0.43
	1.50	0.81	0.76	0.72	0.72	0.68	0.65	0.63	0.60	0.58	0.54	0.53	0.51	0.44
指	2.00	0.87	0.82	0.78	0.76	0.72	0.70	0.66	0.63	0.61	0.56	0.55	0.54	0.46
	2.50	0.91	0.86	0.82	0.79	0.76	0.73	0.68	0.66	0.64	0.58	0.56	0.55	0.47
	3.00	0.93	0.89	0.86	0.80	0.78	0.75	0.69	0.67	0.66	0.58	0.57	0.56	0.47
	4.00	0.96	0.93	0.90	0.83	0.81	0.79	0.71	0.69	0.68	0.60	0.59	0.58	0.48
	5.00	0.99	0.96	0.93	0.85	0.83	0.81	0.72	0.71	0.70	0.60	0.60	0.59	0.49
数	7.00	1.01	0.99	0.97	0.87	0.85	0.84	0.73	0.72	0.72	0.61	0.61	0.60	0.49
	10.00	1.03	1.02	1.00	0.88	0.87	0.86	0.74	0.74	0.73	0.62	0.61	0.61	0.50