



配光特性

図番 YL230207



カタログ番号	K4621(B・W)	
	3000K Ra80	
使用ランプ	LED 3.8W	
器具光束	293.0 lm _{1,000}	
下方効率	50.0 %	
上方効率	50.0 %	
最大取付間隔	下方向	上方向
A断面	0.37 H	0.37 H
C断面		
B断面		

	角度	光度
	0°	440
	10°	243
	20°	110
	30°	77
	40°	8
	50°	1
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	1
	140°	8
	150°	77
	160°	110
170°	243	
180°	440	

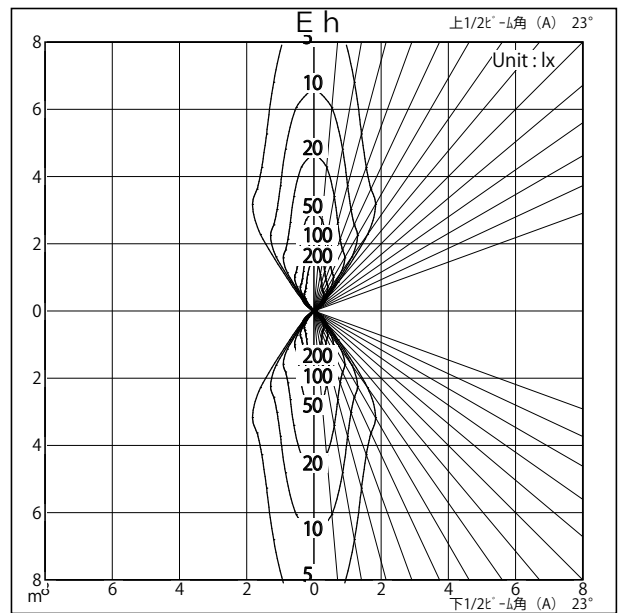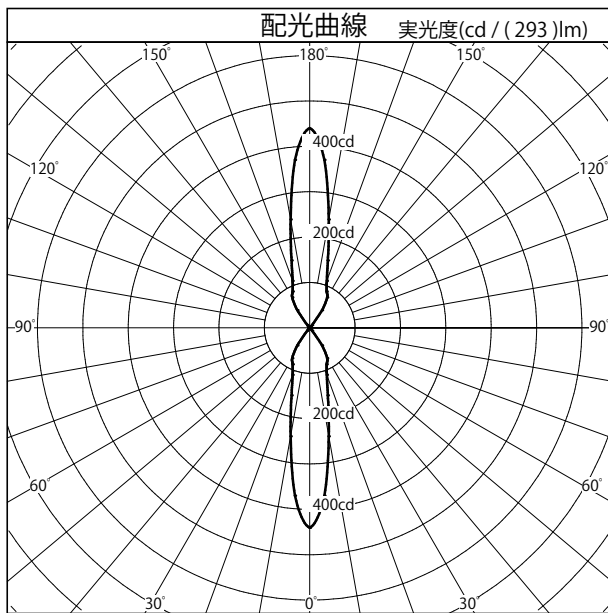

照明率表		平均照度=台数*照明率*保守率*293(光束)/(間口*奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.51	0.45	0.42	0.47	0.42	0.39	0.43	0.39	0.37	0.39	0.36	0.35	0.32
	0.70	0.61	0.55	0.51	0.55	0.50	0.47	0.50	0.46	0.44	0.44	0.42	0.40	0.36
	1.00	0.71	0.65	0.60	0.63	0.59	0.55	0.56	0.53	0.50	0.49	0.47	0.45	0.40
	1.25	0.76	0.70	0.66	0.67	0.63	0.60	0.59	0.56	0.54	0.52	0.50	0.48	0.42
	1.50	0.80	0.75	0.70	0.70	0.67	0.63	0.62	0.59	0.57	0.53	0.52	0.50	0.43
指	2.00	0.86	0.81	0.77	0.75	0.71	0.68	0.65	0.62	0.60	0.55	0.54	0.53	0.45
	2.50	0.89	0.85	0.81	0.78	0.74	0.72	0.67	0.65	0.63	0.57	0.55	0.54	0.46
	3.00	0.92	0.88	0.84	0.79	0.77	0.74	0.68	0.66	0.65	0.58	0.56	0.55	0.46
	4.00	0.95	0.92	0.89	0.82	0.80	0.78	0.70	0.69	0.67	0.59	0.58	0.57	0.47
	5.00	0.98	0.95	0.92	0.84	0.82	0.80	0.71	0.70	0.69	0.60	0.59	0.58	0.48
数	7.00	1.00	0.98	0.96	0.86	0.84	0.83	0.72	0.72	0.71	0.60	0.60	0.59	0.49
	10.00	1.02	1.01	0.99	0.87	0.86	0.85	0.74	0.73	0.72	0.61	0.61	0.60	0.49