


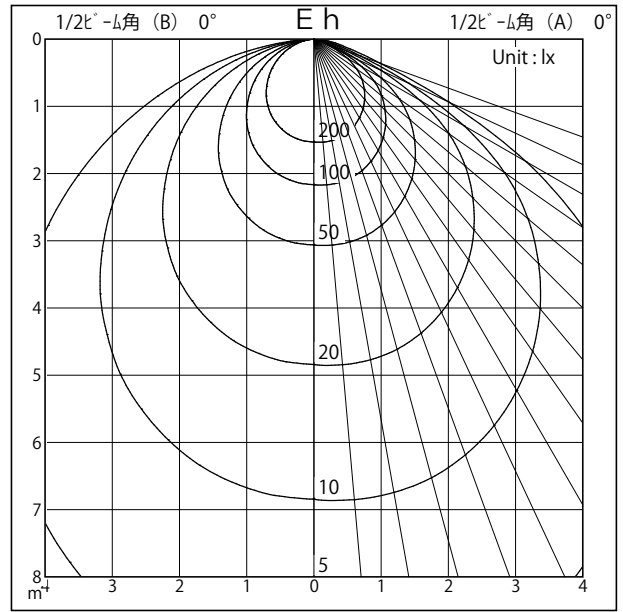
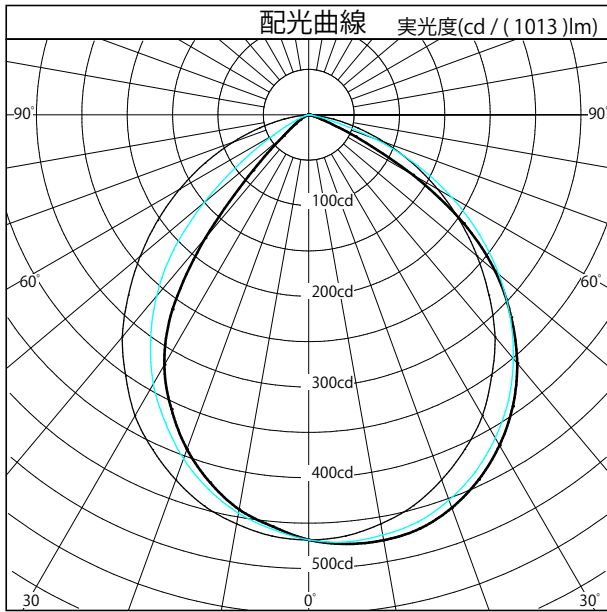
配光特性

図番 YL230215



カタログ番号	K4634B
使用ランプ	LED 15W
器具光束	1013.0 lm <small>1,000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

	角度	光度
	0°	468
	10°	476
	20°	461
	30°	421
	40°	357
	50°	268
	60°	133
	70°	16
	80°	3
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	



照明率表		平均照度=台数×照明率×保守率×1013(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.43	0.36	0.31	0.42	0.35	0.31	0.41	0.35	0.31	0.41	0.35	0.30	0.29
	0.70	0.57	0.49	0.43	0.55	0.48	0.43	0.54	0.47	0.43	0.53	0.47	0.42	0.40
	1.00	0.71	0.63	0.57	0.69	0.62	0.57	0.67	0.61	0.56	0.65	0.60	0.56	0.53
	1.25	0.79	0.71	0.66	0.76	0.70	0.65	0.74	0.68	0.64	0.72	0.67	0.63	0.61
	1.50	0.84	0.77	0.72	0.82	0.76	0.71	0.79	0.74	0.70	0.77	0.72	0.69	0.66
指	2.00	0.92	0.86	0.81	0.89	0.84	0.79	0.86	0.81	0.78	0.83	0.79	0.76	0.74
	2.50	0.97	0.91	0.87	0.93	0.89	0.85	0.90	0.86	0.83	0.87	0.84	0.81	0.78
	3.00	1.00	0.95	0.91	0.96	0.92	0.89	0.93	0.89	0.86	0.90	0.87	0.84	0.81
	4.00	1.05	1.01	0.97	1.01	0.97	0.94	0.97	0.94	0.92	0.93	0.91	0.89	0.86
	5.00	1.07	1.04	1.01	1.03	1.00	0.98	0.99	0.97	0.95	0.95	0.94	0.92	0.89
数	7.00	1.11	1.08	1.06	1.06	1.04	1.02	1.02	1.00	0.99	0.98	0.97	0.95	0.92
	10.00	1.13	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.98	0.94