
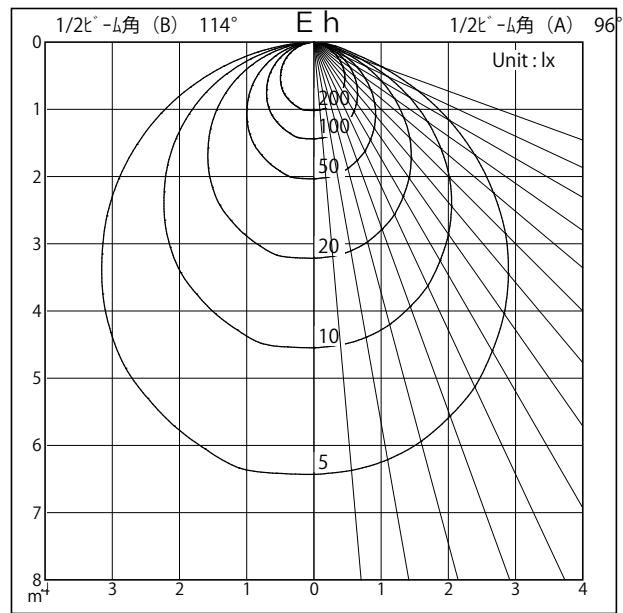
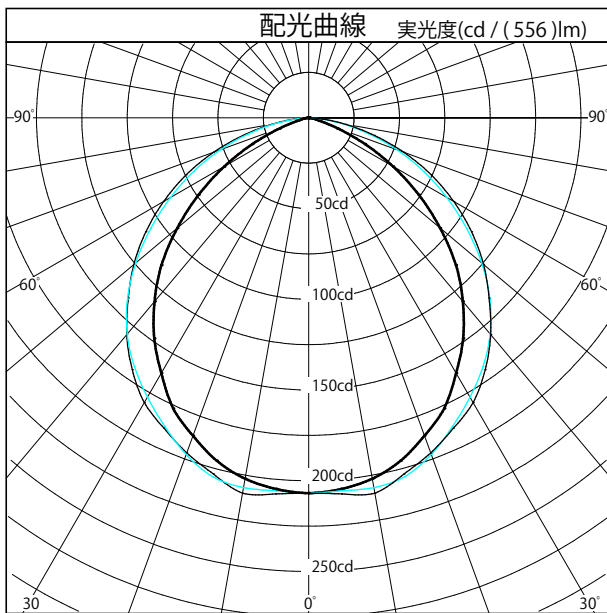




カタログ番号	K4609B
	3000K Ra80
使用ランプ	LED 3.9W
器具光束	556.0 lm _{1.000}
下方効率	99.7 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	207
	10°	202
	20°	186
	30°	162
	40°	132
	50°	95
	60°	54
	70°	17
	80°	3
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	



照明率表		平均照度=台数×照明率×保守率×556(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.40	0.32	0.26	0.39	0.31	0.26	0.38	0.31	0.26	0.37	0.30	0.26	0.24
	0.70	0.52	0.44	0.38	0.51	0.43	0.37	0.49	0.42	0.37	0.48	0.42	0.37	0.35
	1.00	0.66	0.58	0.51	0.64	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.47
	1.25	0.74	0.66	0.60	0.72	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.57	0.55
	1.50	0.80	0.72	0.66	0.77	0.71	0.65	0.75	0.69	0.64	0.72	0.67	0.63	0.61
指	2.00	0.88	0.81	0.76	0.85	0.79	0.74	0.82	0.77	0.73	0.79	0.75	0.71	0.69
	2.50	0.94	0.88	0.82	0.90	0.85	0.80	0.87	0.82	0.79	0.84	0.80	0.77	0.74
	3.00	0.97	0.92	0.87	0.93	0.89	0.85	0.90	0.86	0.83	0.87	0.83	0.81	0.78
	4.00	1.02	0.98	0.94	0.98	0.94	0.91	0.94	0.91	0.88	0.91	0.88	0.86	0.83
	5.00	1.06	1.02	0.98	1.01	0.98	0.95	0.97	0.94	0.92	0.93	0.91	0.89	0.86
数	7.00	1.09	1.06	1.04	1.05	1.02	1.00	1.00	0.98	0.96	0.96	0.95	0.93	0.90
	10.00	1.12	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.98	0.96	0.93