



配光特性

図番 YL230212



カタログ番号	K4610B 3000K Ra80
使用ランプ	LED 8W
器具光束	514.0 lm _{1,000}
下方効率	93.5 %
上方効率	6.1 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	144
	10°	143
	20°	138
	30°	129
	40°	115
	50°	97
	60°	76
	70°	51
	80°	26
	90°	6
	100°	3
	110°	7
	120°	7
	130°	5
	140°	3
	150°	1
	160°	0
170°	0	
180°	0	

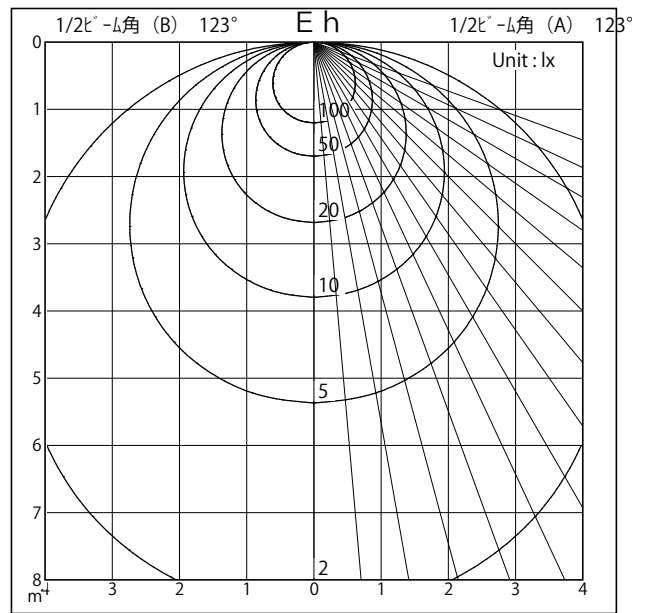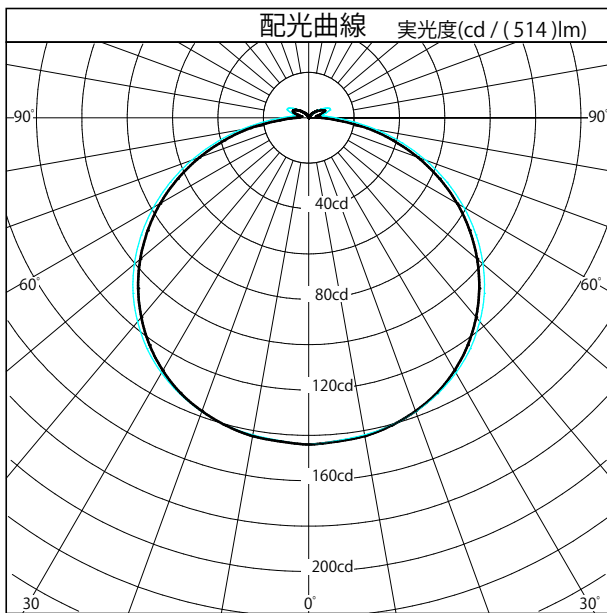

照明率表		平均照度=台数×照明率×保守率×514(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.36	0.27	0.22	0.34	0.27	0.22	0.33	0.26	0.21	0.31	0.25	0.21	0.19
	0.70	0.47	0.38	0.32	0.45	0.37	0.31	0.43	0.36	0.31	0.41	0.35	0.30	0.28
	1.00	0.61	0.51	0.45	0.58	0.50	0.44	0.55	0.48	0.43	0.52	0.46	0.42	0.39
	1.25	0.68	0.59	0.53	0.65	0.57	0.51	0.62	0.55	0.50	0.59	0.53	0.49	0.46
	1.50	0.74	0.66	0.59	0.71	0.63	0.57	0.67	0.61	0.56	0.64	0.59	0.54	0.51
指	2.00	0.83	0.75	0.69	0.78	0.72	0.67	0.74	0.69	0.64	0.71	0.66	0.62	0.59
	2.50	0.89	0.82	0.76	0.84	0.78	0.73	0.79	0.75	0.70	0.75	0.71	0.68	0.64
	3.00	0.92	0.86	0.81	0.87	0.82	0.78	0.83	0.78	0.75	0.79	0.75	0.72	0.68
	4.00	0.98	0.93	0.88	0.93	0.88	0.84	0.88	0.84	0.81	0.83	0.80	0.78	0.73
	5.00	1.02	0.97	0.93	0.96	0.92	0.89	0.91	0.88	0.85	0.86	0.83	0.81	0.77
数	7.00	1.06	1.02	0.99	1.00	0.97	0.94	0.94	0.92	0.90	0.89	0.87	0.86	0.81
	10.00	1.09	1.06	1.04	1.03	1.01	0.99	0.97	0.95	0.94	0.92	0.91	0.89	0.85