



配光特性

図番 YL230214



カタログ番号	K4632(B・W)	
	3000K Ra80	
使用ランプ	LED 16W	
器具光束	932.0 lm _{1,000}	
下方効率	50.0 %	
上方効率	50.0 %	
最大取付間隔	下方向	上方向
A断面		
C断面		
B断面		

	角度	光度
	0°	1093
	10°	370
	20°	69
	30°	18
	40°	11
	50°	9
	60°	7
	70°	4
	80°	1
	90°	0
	100°	1
	110°	4
	120°	7
	130°	9
	140°	11
	150°	18
	160°	69
170°	370	
180°	1093	

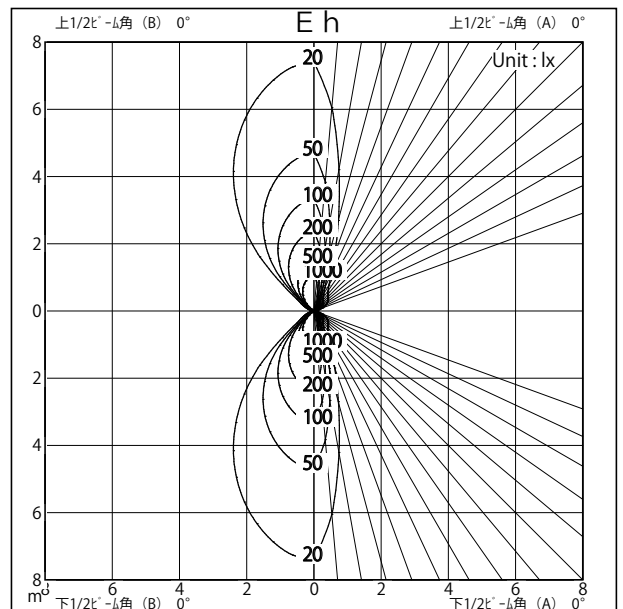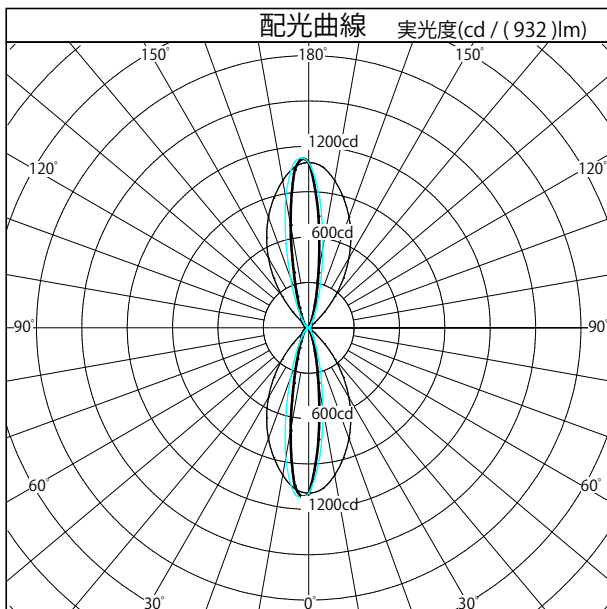

照明率表		平均照度=台数×照明率×保守率×932(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.48	0.42	0.38	0.44	0.39	0.36	0.40	0.36	0.34	0.36	0.33	0.31	0.29
	0.70	0.58	0.52	0.48	0.53	0.48	0.44	0.47	0.43	0.41	0.42	0.39	0.37	0.33
	1.00	0.69	0.62	0.58	0.61	0.56	0.53	0.54	0.50	0.48	0.47	0.45	0.43	0.38
	1.25	0.74	0.68	0.64	0.66	0.61	0.58	0.57	0.54	0.52	0.50	0.48	0.46	0.40
	1.50	0.79	0.73	0.68	0.69	0.65	0.61	0.60	0.57	0.55	0.52	0.50	0.48	0.41
指	2.00	0.85	0.79	0.75	0.74	0.70	0.67	0.63	0.61	0.59	0.54	0.53	0.51	0.43
	2.50	0.88	0.84	0.80	0.77	0.73	0.71	0.66	0.64	0.62	0.56	0.54	0.53	0.45
	3.00	0.91	0.87	0.83	0.79	0.76	0.73	0.67	0.65	0.64	0.57	0.55	0.54	0.45
	4.00	0.95	0.91	0.88	0.82	0.79	0.77	0.69	0.68	0.66	0.58	0.57	0.56	0.47
	5.00	0.97	0.94	0.91	0.83	0.81	0.79	0.71	0.69	0.68	0.59	0.58	0.57	0.47
数	7.00	1.00	0.97	0.95	0.85	0.84	0.82	0.72	0.71	0.70	0.60	0.59	0.59	0.48
	10.00	1.02	1.00	0.99	0.87	0.86	0.85	0.73	0.73	0.72	0.61	0.60	0.60	0.49