
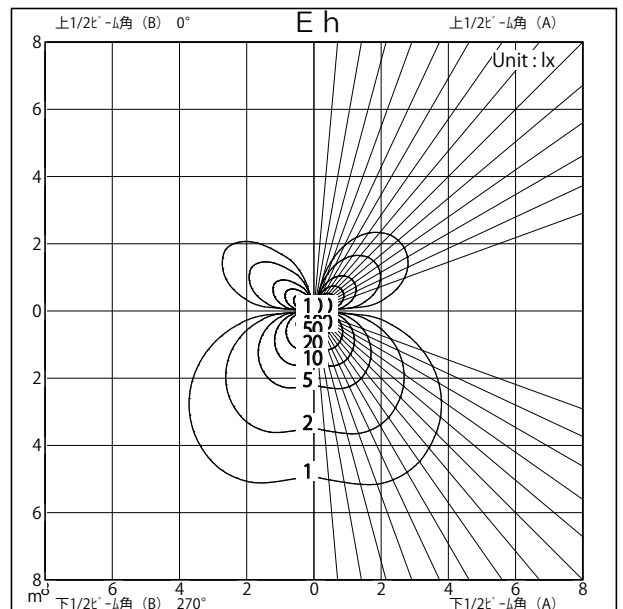
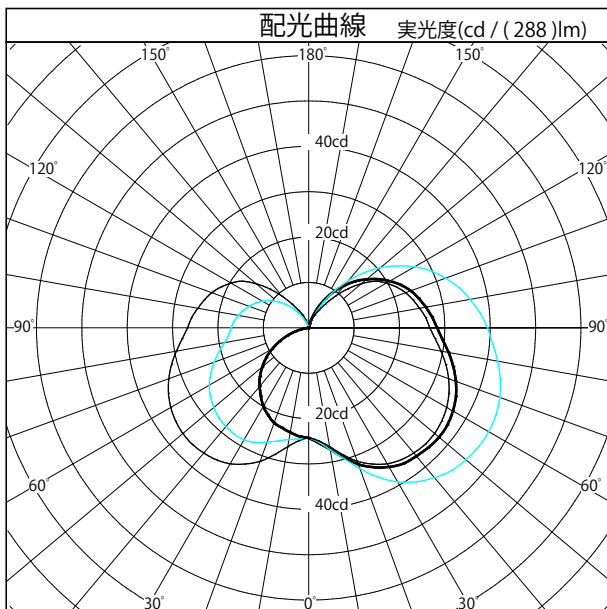




カタログ番号	K4194B	
	3000K Ra80	
使用ランプ	LED 2.9W	
器具光束	288.0 lm <sub>1,000</sub>	
下方効率	65.9 %	
上方効率	32.8 %	
最大取付間隔	下方向	上方向
A 断面		
C 断面		
B 断面		

	角度	光度
	0°	24
	10°	27
	20°	32
	30°	35
	40°	37
	50°	38
	60°	37
	70°	35
	80°	31
	90°	28
	100°	26
	110°	24
	120°	21
	130°	17
	140°	12
	150°	7
	160°	3
170°	0	
180°	0	



照明率表		平均照度=台数×照明率×保守率×288(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.28	0.20	0.15	0.25	0.18	0.13	0.22	0.16	0.12	0.19	0.14	0.10	0.07
	0.70	0.38	0.29	0.23	0.34	0.26	0.20	0.29	0.23	0.18	0.25	0.20	0.16	0.12
	1.00	0.50	0.40	0.33	0.43	0.35	0.29	0.38	0.31	0.26	0.32	0.27	0.23	0.18
	1.25	0.57	0.47	0.40	0.50	0.42	0.36	0.43	0.37	0.32	0.37	0.32	0.28	0.22
	1.50	0.62	0.53	0.45	0.54	0.47	0.41	0.47	0.41	0.36	0.41	0.36	0.32	0.26
指	2.00	0.70	0.61	0.54	0.62	0.54	0.49	0.54	0.48	0.43	0.46	0.42	0.38	0.31
	2.50	0.76	0.68	0.61	0.66	0.60	0.54	0.58	0.53	0.48	0.50	0.46	0.42	0.35
	3.00	0.80	0.72	0.66	0.70	0.64	0.59	0.61	0.56	0.52	0.53	0.49	0.46	0.38
	4.00	0.86	0.79	0.73	0.75	0.70	0.65	0.66	0.62	0.58	0.57	0.54	0.51	0.43
	5.00	0.89	0.84	0.79	0.79	0.74	0.70	0.69	0.65	0.62	0.60	0.57	0.54	0.46
数	7.00	0.94	0.90	0.85	0.83	0.79	0.76	0.73	0.70	0.67	0.63	0.61	0.59	0.50
	10.00	0.98	0.95	0.91	0.86	0.84	0.81	0.76	0.74	0.71	0.66	0.64	0.63	0.54