



# 配光特性

図番 YL240019



カタログ番号	T4505B
使用ランプ	
器具光束	2056.0 lm <small>1.000</small>
最大光度	2510.2 cd
1 / 2 ビーム角	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	2510
	10°	1698
	20°	768
	30°	237
	40°	96
	50°	47
	60°	19
	70°	7
	80°	2
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

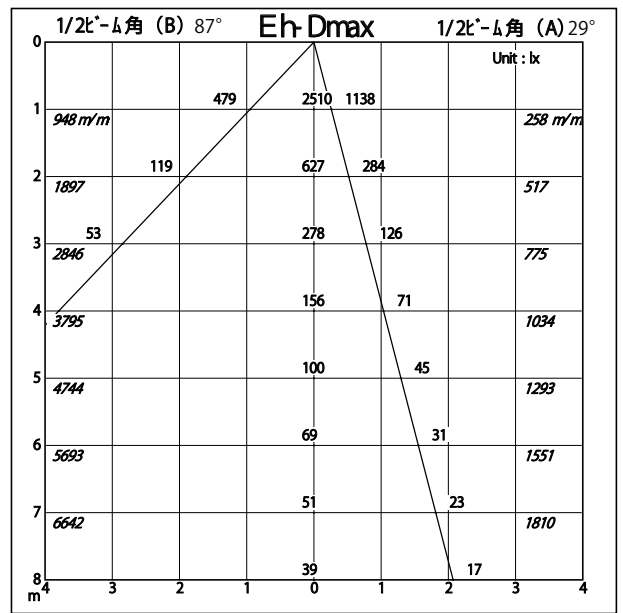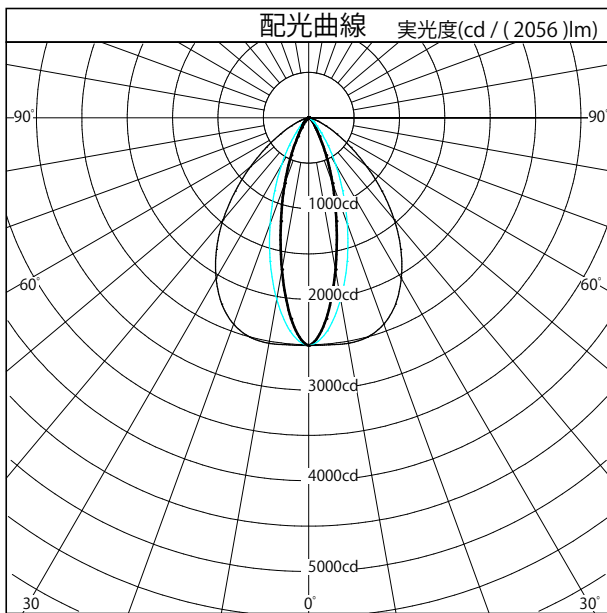

照明率表		平均照度=台数*照明率*保守率* 2056 (光束)/(間口*奥行)												
		20												
床面反射率 %		0												
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.59	0.53	0.48	0.58	0.52	0.48	0.57	0.52	0.48	0.57	0.51	0.48	0.46
	0.70	0.72	0.65	0.61	0.71	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.60	0.58
	1.00	0.85	0.78	0.74	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.70
	1.25	0.92	0.85	0.81	0.89	0.84	0.80	0.87	0.82	0.79	0.85	0.81	0.78	0.76
	1.50	0.96	0.91	0.86	0.94	0.89	0.85	0.91	0.87	0.83	0.89	0.85	0.82	0.80
指	2.00	1.03	0.98	0.93	0.99	0.95	0.92	0.97	0.93	0.90	0.94	0.91	0.88	0.86
	2.50	1.07	1.02	0.98	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.89
	3.00	1.09	1.05	1.02	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.96	0.94	0.91
	4.00	1.13	1.10	1.07	1.09	1.06	1.04	1.05	1.03	1.01	1.01	1.00	0.98	0.95
数	5.00	1.15	1.13	1.10	1.11	1.09	1.07	1.07	1.05	1.03	1.03	1.02	1.00	0.97
	7.00	1.18	1.16	1.14	1.13	1.12	1.10	1.09	1.07	1.06	1.05	1.04	1.03	0.99
	10.00	1.20	1.18	1.17	1.15	1.14	1.13	1.10	1.09	1.09	1.06	1.05	1.05	1.01