



配光特性

図番 YL240022W



カタログ番号	T4507W
使用ランプ	LED 30W
器具光束	3404.0 lm <small>1.000</small>
最大光度	3333.3 cd
1 / 2 ビーム角	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	3333
	10°	2726
	20°	1664
	30°	441
	40°	111
	50°	64
	60°	20
	70°	8
	80°	3
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

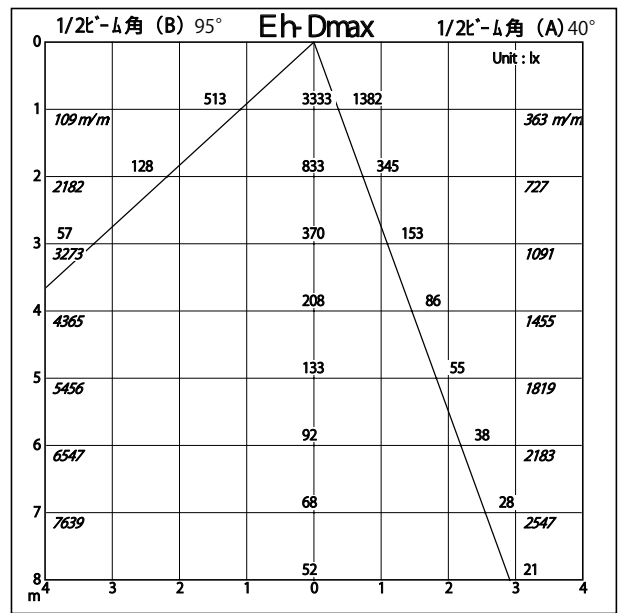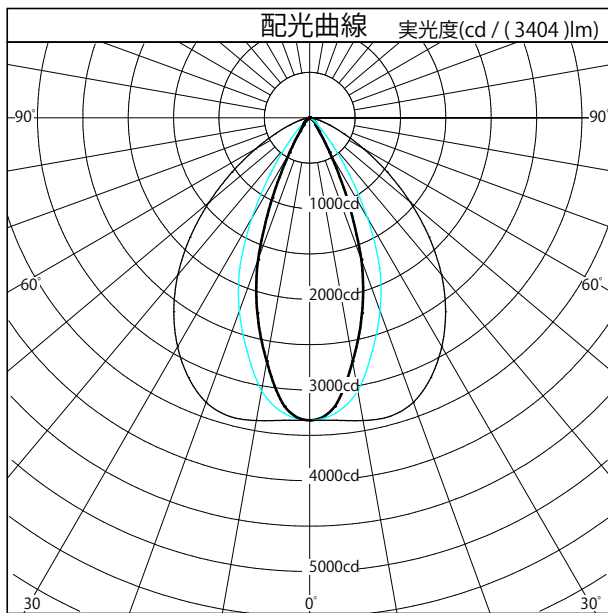

照明率表		平均照度=台数*照明率*保守率* 3404 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.58	0.51	0.46	0.57	0.50	0.46	0.56	0.50	0.46	0.55	0.50	0.46
	0.70	0.71	0.64	0.59	0.69	0.63	0.59	0.68	0.62	0.58	0.67	0.62	0.58
	1.00	0.83	0.77	0.72	0.81	0.76	0.71	0.80	0.74	0.70	0.78	0.73	0.70
	1.25	0.90	0.84	0.79	0.88	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76
	1.50	0.95	0.89	0.84	0.92	0.87	0.83	0.90	0.85	0.82	0.87	0.84	0.81
指	2.00	1.01	0.96	0.92	0.98	0.94	0.90	0.95	0.91	0.88	0.92	0.89	0.87
	2.50	1.05	1.01	0.97	1.02	0.98	0.95	0.98	0.95	0.93	0.95	0.93	0.91
	3.00	1.08	1.04	1.00	1.04	1.01	0.98	1.01	0.98	0.95	0.97	0.95	0.93
	4.00	1.12	1.08	1.05	1.08	1.05	1.02	1.04	1.02	1.00	1.00	0.98	0.97
数	5.00	1.14	1.11	1.09	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.00	0.99
	7.00	1.17	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.02
	10.00	1.19	1.17	1.16	1.14	1.13	1.11	1.09	1.08	1.07	1.05	1.04	1.04