



# 配光特性

図番 YL230066

カタログ番号	T4515B
使用ランプ	
器具光束	3397.0 lm <small>1.000</small>
最大光度	8013.9 cd
1 / 2 ビーム角	
A 断面	24.00 °
C 断面	
B 断面	



	角度	光度
	0°	8014
	10°	4695
	20°	2228
	30°	1088
	40°	517
	50°	284
	60°	278
	70°	63
	80°	9
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
160°	0	
170°	0	
180°	0	

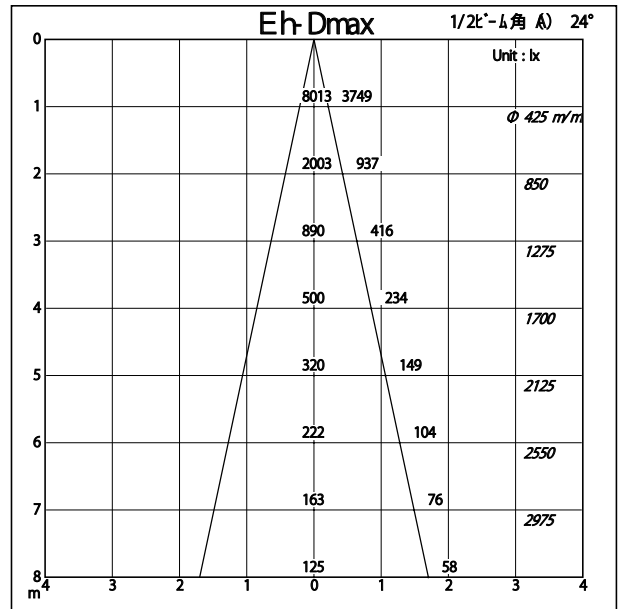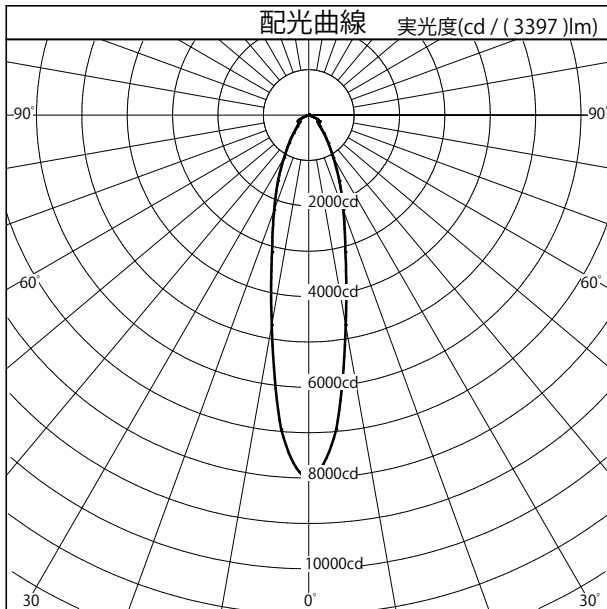

照明率表		平均照度=台数*照明率*保守率* 3397 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.64	0.58	0.54	0.63	0.57	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52
	0.70	0.74	0.68	0.64	0.73	0.67	0.63	0.72	0.67	0.63	0.70	0.66	0.63	0.61
	1.00	0.85	0.79	0.74	0.83	0.77	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70
	1.25	0.90	0.85	0.80	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.78	0.76
	1.50	0.94	0.89	0.85	0.92	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.81	0.79
指	2.00	1.00	0.95	0.92	0.97	0.93	0.90	0.94	0.91	0.88	0.92	0.89	0.87	0.84
	2.50	1.04	1.00	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.87
	3.00	1.06	1.02	0.99	1.02	0.99	0.97	0.99	0.96	0.94	0.96	0.94	0.92	0.89
	4.00	1.09	1.06	1.04	1.05	1.03	1.01	1.02	1.00	0.98	0.98	0.97	0.95	0.92
	5.00	1.11	1.09	1.07	1.07	1.05	1.03	1.03	1.02	1.00	1.00	0.98	0.97	0.94
数	7.00	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96
	10.00	1.16	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.02	1.02	1.01	0.97