



配光特性

図番 YL240024



カタログ番号	T4432B
使用ランプ	LED 371W
器具光束	39988.0 lm <small>1.000</small>
最大光度	31185.4 cd
1 / 2 ビーム角	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	31185
	10°	29865
	20°	25921
	30°	20436
	40°	14410
	50°	6396
	60°	1634
	70°	505
	80°	125
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

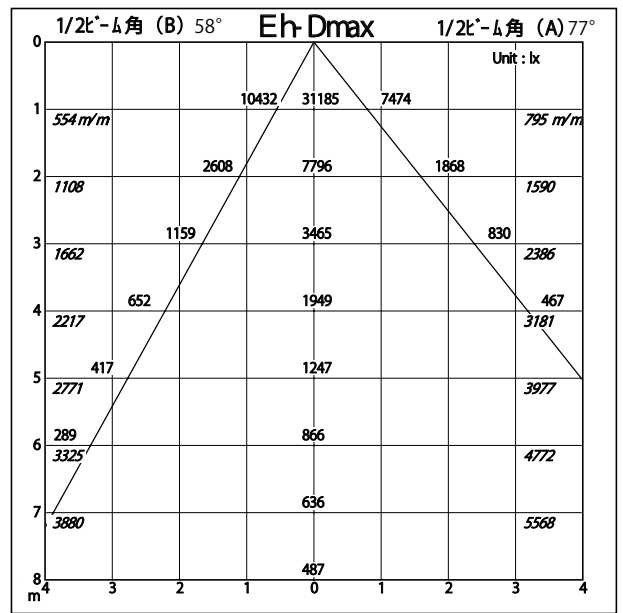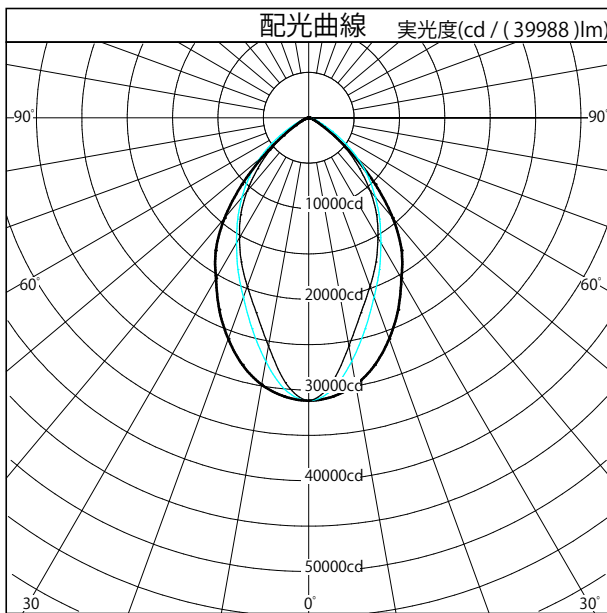

照明率表		平均照度=台数*照明率*保守率* 39988 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.51	0.44	0.39	0.50	0.44	0.39	0.49	0.43	0.39	0.48	0.43	0.39	0.37
	0.70	0.65	0.57	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.61	0.55	0.51	0.50
	1.00	0.78	0.71	0.66	0.76	0.70	0.65	0.74	0.69	0.65	0.73	0.68	0.64	0.62
	1.25	0.85	0.79	0.74	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.74	0.71	0.69
	1.50	0.90	0.84	0.79	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74
指	2.00	0.97	0.92	0.87	0.94	0.89	0.85	0.91	0.87	0.84	0.88	0.85	0.82	0.80
	2.50	1.01	0.96	0.92	0.98	0.94	0.90	0.94	0.91	0.88	0.91	0.89	0.86	0.84
	3.00	1.04	1.00	0.96	1.00	0.97	0.93	0.97	0.94	0.91	0.93	0.91	0.89	0.86
	4.00	1.08	1.04	1.01	1.04	1.01	0.98	1.00	0.98	0.96	0.97	0.95	0.93	0.90
数	5.00	1.10	1.07	1.05	1.06	1.03	1.01	1.02	1.00	0.98	0.98	0.97	0.95	0.92
	7.00	1.13	1.11	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.98	0.95
	10.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.97