



配光特性

図番 YL240025



カタログ番号	T4433B
使用ランプ	LED 371W
器具光束	38819.0 lm <small>1.000</small>
最大光度	51757.4 cd
1 / 2 ビーム角	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	51757
	10°	31617
	20°	18476
	30°	7460
	40°	1892
	50°	599
	60°	274
	70°	130
	80°	40
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

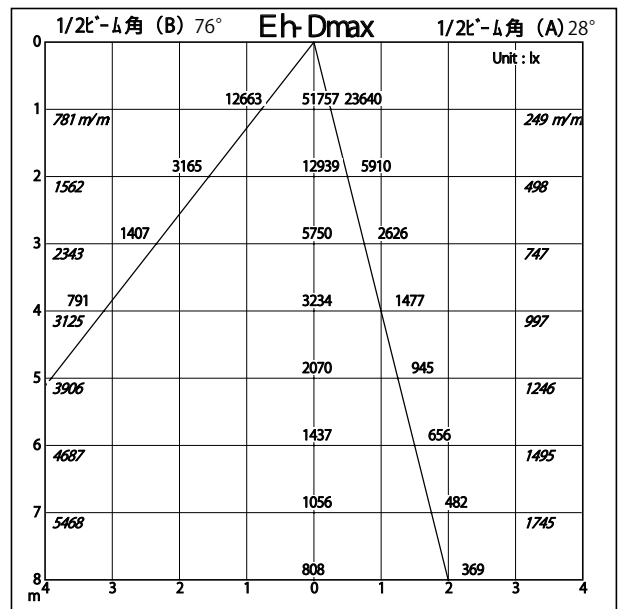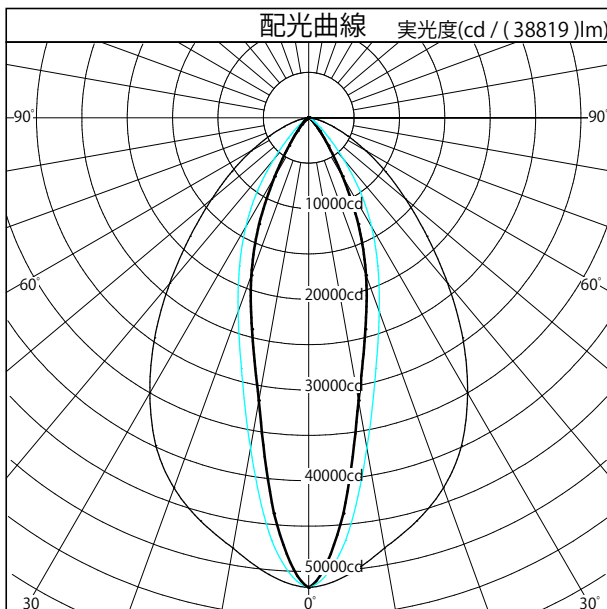

照明率表		平均照度=台数*照明率*保守率* 38819 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.60	0.54	0.49	0.59	0.53	0.49	0.59	0.53	0.49	0.58	0.52	0.49
	0.70	0.74	0.67	0.62	0.72	0.66	0.61	0.71	0.65	0.61	0.70	0.65	0.61
	1.00	0.86	0.80	0.75	0.84	0.78	0.74	0.82	0.77	0.73	0.81	0.76	0.73
	1.25	0.93	0.87	0.82	0.91	0.85	0.81	0.88	0.84	0.80	0.86	0.82	0.79
	1.50	0.98	0.92	0.87	0.95	0.90	0.86	0.93	0.88	0.85	0.90	0.87	0.83
指	2.00	1.04	0.99	0.95	1.01	0.97	0.93	0.98	0.94	0.91	0.95	0.92	0.90
	2.50	1.09	1.04	1.00	1.05	1.01	0.98	1.01	0.98	0.95	0.98	0.96	0.93
	3.00	1.11	1.07	1.03	1.07	1.04	1.01	1.04	1.01	0.98	1.00	0.98	0.96
	4.00	1.15	1.12	1.09	1.11	1.08	1.05	1.07	1.05	1.03	1.03	1.01	1.00
	5.00	1.17	1.15	1.12	1.13	1.11	1.08	1.09	1.07	1.05	1.05	1.03	1.02
数	7.00	1.20	1.18	1.16	1.15	1.13	1.12	1.11	1.09	1.08	1.07	1.06	1.05
	10.00	1.22	1.21	1.19	1.17	1.16	1.15	1.12	1.11	1.10	1.08	1.07	1.07