



# 配光特性

図番 YL240063



カタログ番号	J4516
使用ランプ	1050 lm
器具光束	1050.0 lm <small>1,000</small>
下方効率	0.0 %
上方効率	100.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	0
10°	0
20°	0
30°	0
40°	0
50°	0
60°	0
70°	0
80°	0
90°	0
100°	0
110°	1
120°	109
130°	413
140°	969
150°	2407
160°	2584
170°	1158
180°	528

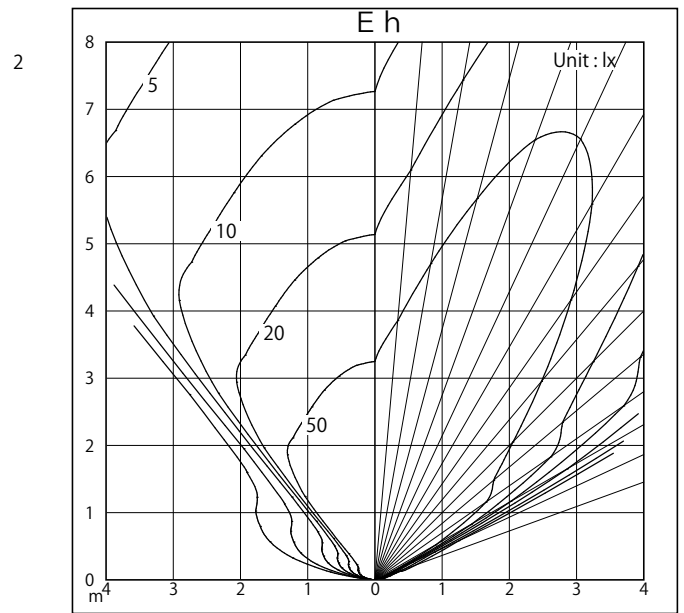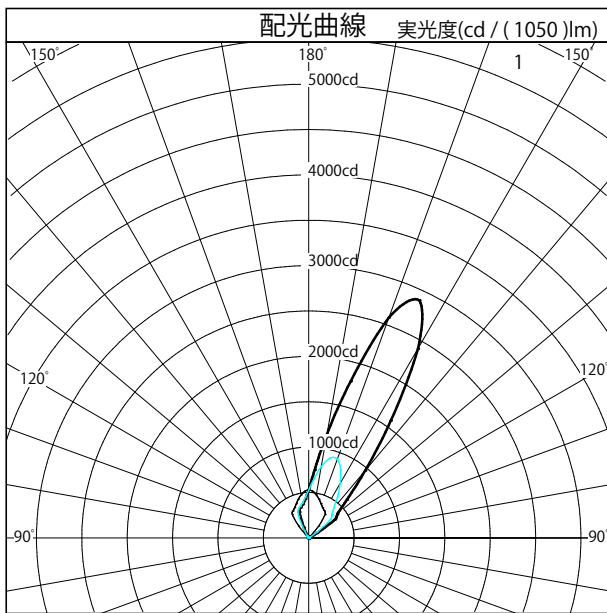

高さ (m)	壁面照度分布 (単灯)							連灯		
	0.50	1.00	1.50	2.00	2.50	3.00	0.50	1.00	1.50	
3.50	40	30	16	9	6	4	3	91	89	91
3.00	74	49	23	11	7	5	2	138	131	138
2.50	138	78	30	14	9	4	0	216	192	216
2.00	245	112	37	18	7	1	0	333	262	333
1.50	306	130	44	16	0	0	0	395	291	395
1.00	211	116	24	0	0	0	0	260	234	260
0.50	27	1	0	0	0	0	0	27	1	27

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0 (m)  
単位: lx (m)