




配光特性

図番 YL240036

カタログ番号	H4261B
使用ランプ	LED 21W
器具光束	1771.0 lm <small>1,000</small>
下方効率	97.7 %
上方効率	1.9 %
最大取付間隔	
A 断面	
C 断面	
B 断面	



角度	光度
0°	1
10°	1
20°	0
30°	0
40°	0
50°	0
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

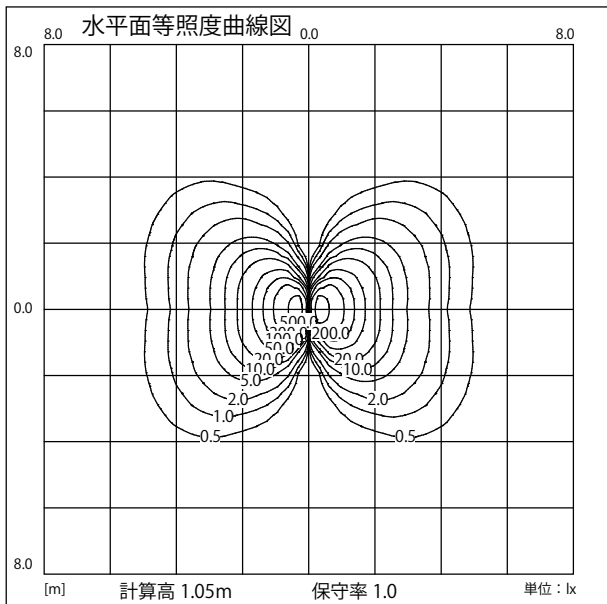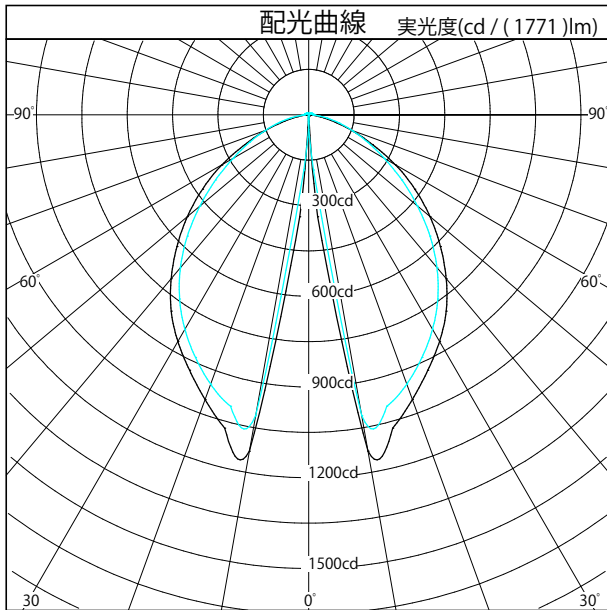




配光特性

図番 YL240037

カタログ番号	H4261B
使用ランプ	LED 21W
器具光束	1721.0 lm <small>1.000</small>
下方効率	97.7 %
上方効率	2.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	



角度	光度
0°	1
10°	1151
20°	1065
30°	951
40°	828
50°	661
60°	469
70°	275
80°	95
90°	1
100°	1
110°	1
120°	1
130°	1
140°	1
150°	1
160°	2
170°	2
180°	0

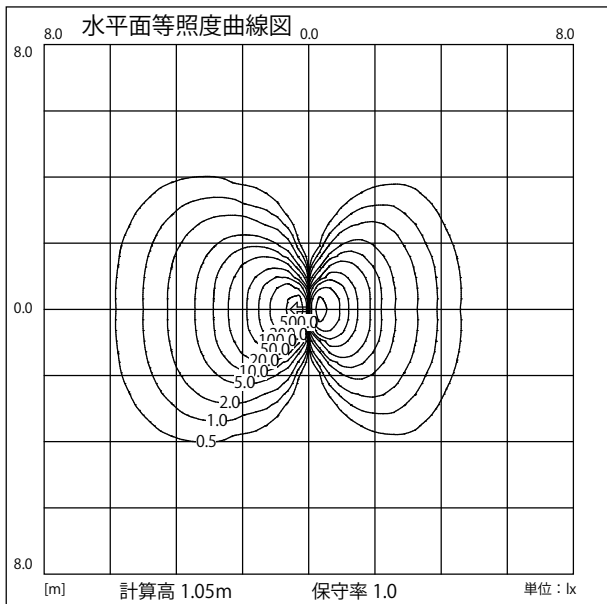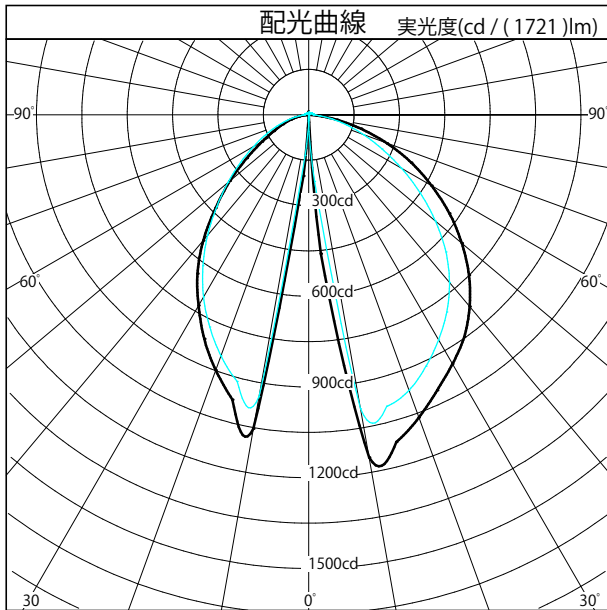

配光特性

図番 YL240038



カタログ番号	H4261B
使用ランプ	LED 21W
器具光束	1655.0 lm <small>1.000</small>
下方効率	98.0 %
上方効率	1.7 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	0
10°	1074
20°	1092
30°	1007
40°	897
50°	753
60°	560
70°	343
80°	128
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	1
170°	1
180°	0

