



配光特性

図番 YL240044



カタログ番号	H8702D	
使用ランプ	LED 5W	
器具光束	406.0 lm _{1,000}	
下方効率	57.7 %	
上方効率	42.3 %	
最大取付間隔	下方向	上方向
A断面	11.76 H	0.00 H
C断面		
B断面		

	角度	光度
	0°	0
	10°	22
	20°	15
	30°	26
	40°	35
	50°	39
	60°	42
	70°	43
	80°	42
	90°	44
	100°	45
	110°	47
	120°	35
	130°	17
	140°	2
	150°	2
160°	1	
170°	1	
180°	1	

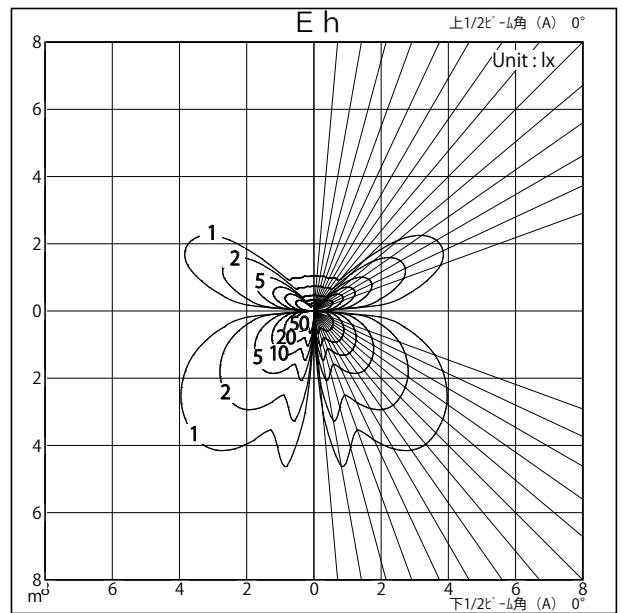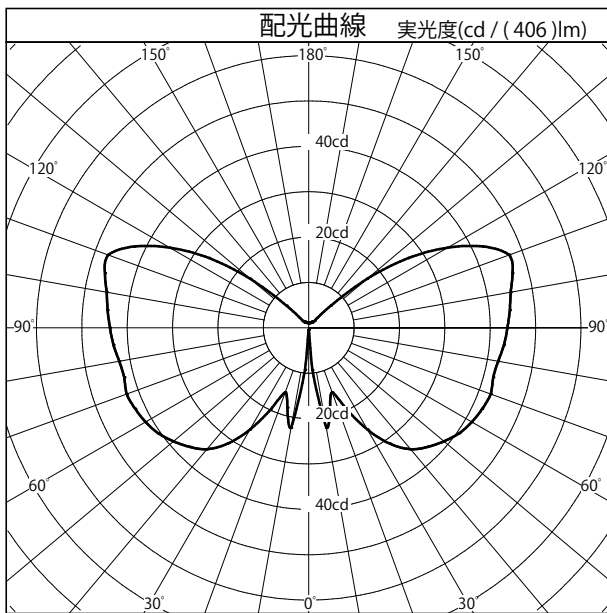

照明率表		平均照度=台数*照明率*保守率*406(光束)/(間口*奥行)													
床面反射率 (%)		20												0	
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.26	0.18	0.13	0.23	0.16	0.11	0.19	0.13	0.09	0.15	0.10	0.07	0.04	
	0.70	0.36	0.26	0.20	0.30	0.22	0.17	0.25	0.19	0.14	0.20	0.15	0.11	0.07	
	1.00	0.47	0.37	0.29	0.39	0.31	0.25	0.33	0.26	0.21	0.26	0.21	0.17	0.12	
	1.25	0.54	0.44	0.36	0.45	0.37	0.31	0.38	0.31	0.26	0.30	0.25	0.21	0.15	
	1.50	0.59	0.49	0.42	0.50	0.42	0.36	0.42	0.35	0.30	0.34	0.29	0.25	0.18	
	指	2.00	0.67	0.58	0.50	0.57	0.50	0.43	0.47	0.42	0.37	0.39	0.34	0.30	0.23
		2.50	0.73	0.64	0.57	0.62	0.55	0.49	0.52	0.46	0.42	0.42	0.38	0.35	0.26
		3.00	0.77	0.69	0.62	0.65	0.59	0.54	0.55	0.50	0.45	0.45	0.41	0.38	0.29
		4.00	0.83	0.76	0.70	0.71	0.65	0.60	0.59	0.55	0.51	0.49	0.46	0.43	0.34
		5.00	0.87	0.81	0.75	0.74	0.69	0.65	0.62	0.59	0.55	0.52	0.49	0.46	0.37
数	7.00	0.92	0.87	0.82	0.79	0.75	0.71	0.66	0.63	0.60	0.55	0.53	0.51	0.41	
	10.00	0.96	0.92	0.88	0.82	0.79	0.76	0.70	0.67	0.65	0.58	0.56	0.55	0.44	