




# 配光特性

図番 YL240065

|        |                                |
|--------|--------------------------------|
| カタログ番号 | H4708B                         |
| 使用ランプ  | LED35.2W(40W)                  |
| 器具光束   | 3767.0 lm <small>1.000</small> |
| 下方効率   | 100.0 %                        |
| 上方効率   | 0.0 %                          |
| 最大取付間隔 |                                |
| A 断面   |                                |
| C 断面   |                                |
| B 断面   |                                |



| 角度   | 光度   |
|------|------|
| 0°   | 3    |
| 10°  | 2903 |
| 20°  | 2914 |
| 30°  | 2402 |
| 40°  | 1754 |
| 50°  | 1132 |
| 60°  | 619  |
| 70°  | 257  |
| 80°  | 69   |
| 90°  | 3    |
| 100° | 0    |
| 110° | 0    |
| 120° | 0    |
| 130° | 0    |
| 140° | 0    |
| 150° | 0    |
| 160° | 1    |
| 170° | 2    |
| 180° | 0    |

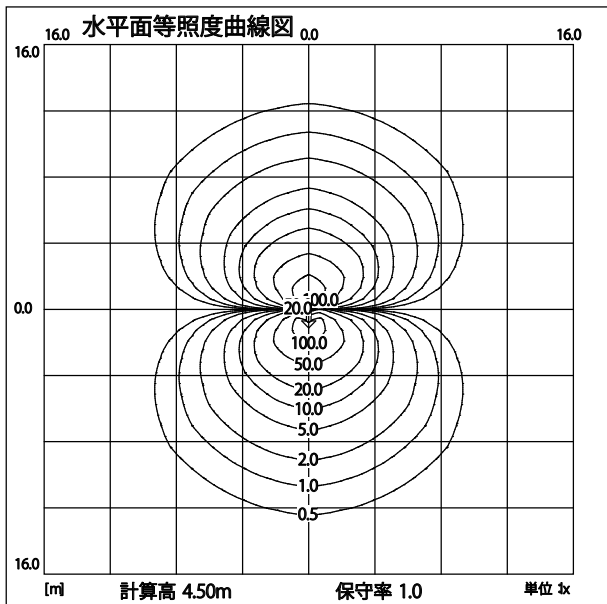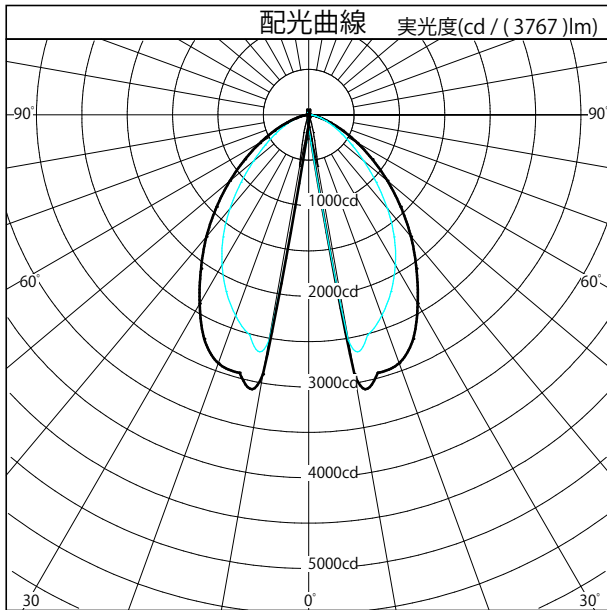



# 配光特性

図番 YL240066



|        |               |    |       |
|--------|---------------|----|-------|
| カタログ番号 | H4708B        |    |       |
| 使用ランプ  | LED35.2W(40W) |    |       |
| 器具光束   | 3786.0        | lm | 1.000 |
| 下方効率   | 99.4 %        |    |       |
| 上方効率   | 0.6 %         |    |       |
| 最大取付間隔 |               |    |       |
| A断面    |               |    |       |
| C断面    |               |    |       |
| B断面    |               |    |       |

| 角度   | 光度   |
|------|------|
| 0°   | 3    |
| 10°  | 2981 |
| 20°  | 3027 |
| 30°  | 2836 |
| 40°  | 2225 |
| 50°  | 1616 |
| 60°  | 1077 |
| 70°  | 565  |
| 80°  | 183  |
| 90°  | 5    |
| 100° | 0    |
| 110° | 0    |
| 120° | 0    |
| 130° | 0    |
| 140° | 0    |
| 150° | 0    |
| 160° | 1    |
| 170° | 2    |
| 180° | 0    |

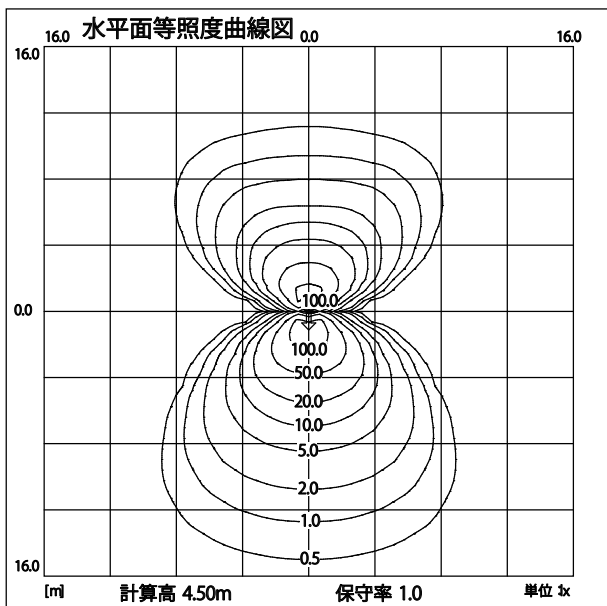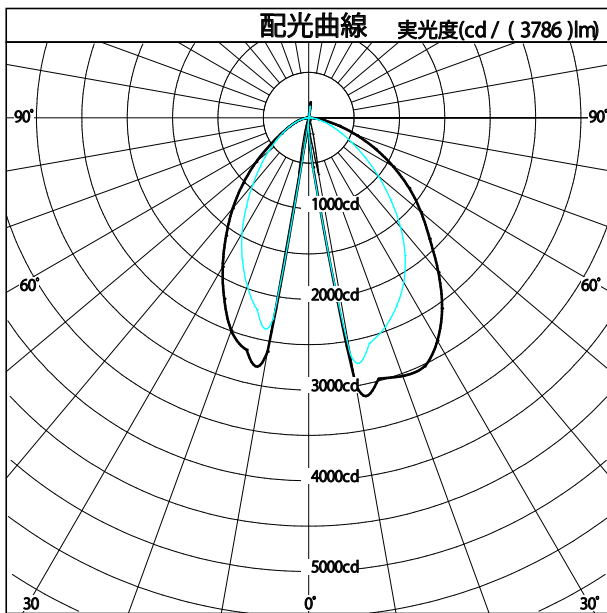

# 配光特性

図番 YL240067



|        |                                |
|--------|--------------------------------|
| カタログ番号 | H4708B                         |
| 使用ランプ  | LED35.2W(40W)                  |
| 器具光束   | 3688.0 lm <small>1.000</small> |
| 下方効率   | 99.4 %                         |
| 上方効率   | 0.5 %                          |
| 最大取付間隔 |                                |
| A 断面   |                                |
| C 断面   |                                |
| B 断面   |                                |

| 角度   | 光度   |
|------|------|
| 0°   | 2    |
| 10°  | 2735 |
| 20°  | 2922 |
| 30°  | 2914 |
| 40°  | 2647 |
| 50°  | 2085 |
| 60°  | 1419 |
| 70°  | 827  |
| 80°  | 300  |
| 90°  | 9    |
| 100° | 0    |
| 110° | 0    |
| 120° | 0    |
| 130° | 0    |
| 140° | 0    |
| 150° | 0    |
| 160° | 0    |
| 170° | 1    |
| 180° | 0    |

