




配光特性

図番 Artemide

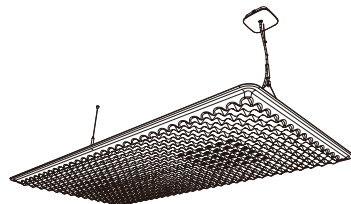

カタログ番号	618EGGBOARD M3101W51		
使用ランプ	LED 64.6W		
ランプ光束	6656.0	lm	1,000
器具効率	100.3 %		
下方効率	39.7 %		
上方効率	60.5 %		
最大取付間隔	下方向	上方向	
A断面			
C断面			
B断面			

	角度	光度
	0°	2393
	10°	2645
	20°	2639
	30°	1664
	40°	532
	50°	101
	60°	8
	70°	2
	80°	1
	90°	9
	100°	121
	110°	281
	120°	498
	130°	770
	140°	1078
	150°	1373
	160°	1605
170°	1748	
180°	1797	

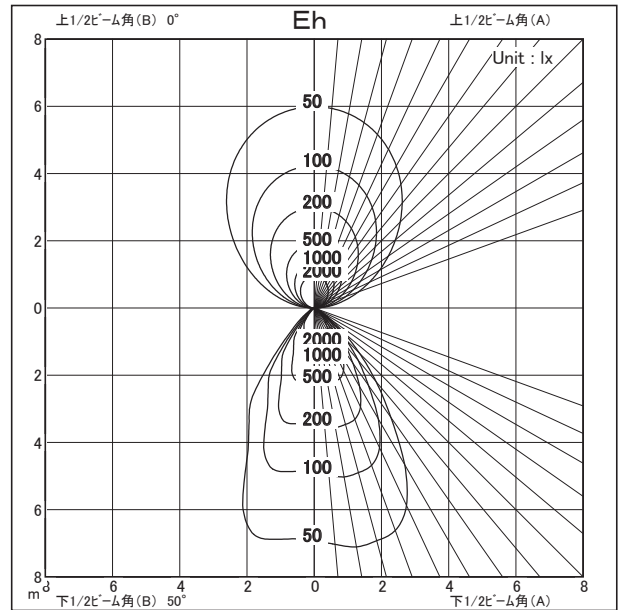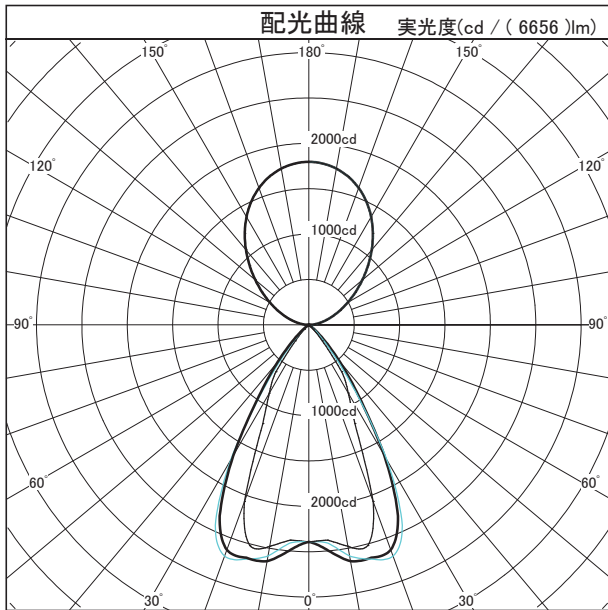

照明率表		平均照度=台数 * 照明率 * 保守率 * 6656 (光束) / (間口 * 奥行)												
床面反射率(%)		20												
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.43	0.36	0.32	0.38	0.33	0.29	0.33	0.29	0.27	0.28	0.26	0.24	0.21
	0.70	0.53	0.47	0.42	0.47	0.42	0.38	0.40	0.37	0.34	0.34	0.32	0.30	0.25
	1.00	0.64	0.58	0.53	0.55	0.50	0.47	0.47	0.44	0.41	0.39	0.37	0.35	0.29
	1.25	0.70	0.64	0.59	0.60	0.56	0.52	0.51	0.47	0.45	0.42	0.40	0.38	0.31
	1.50	0.75	0.69	0.64	0.64	0.59	0.56	0.53	0.50	0.48	0.44	0.42	0.40	0.33
指	2.00	0.81	0.76	0.71	0.68	0.65	0.61	0.57	0.54	0.52	0.46	0.44	0.43	0.34
	2.50	0.85	0.80	0.76	0.71	0.68	0.65	0.59	0.57	0.55	0.47	0.46	0.45	0.35
	3.00	0.88	0.83	0.80	0.73	0.71	0.68	0.60	0.58	0.57	0.48	0.47	0.46	0.36
	4.00	0.92	0.88	0.85	0.76	0.74	0.72	0.63	0.61	0.60	0.50	0.49	0.48	0.37
	5.00	0.94	0.91	0.88	0.78	0.76	0.74	0.64	0.62	0.61	0.51	0.50	0.49	0.37
数	7.00	0.97	0.94	0.92	0.80	0.79	0.77	0.65	0.64	0.63	0.51	0.51	0.50	0.38
	10.00	0.99	0.97	0.96	0.82	0.81	0.80	0.66	0.66	0.65	0.52	0.52	0.51	0.39