



配光特性

図番



カタログ番号	708RM03/8952/14/DA		
使用ランプ	LED11W		
ランプ光束	864.0	lm	1.000
最大光度	14301.8 cd		
1/2ビーム角			
A断面	12.00 °		
C断面	12.00 °		
B断面	10.00 °		

FLOS	角度	光度
	0°	14302
	10°	2570
	20°	175
	30°	12
	40°	7
	50°	4
	60°	2
	70°	1
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
180°	0	

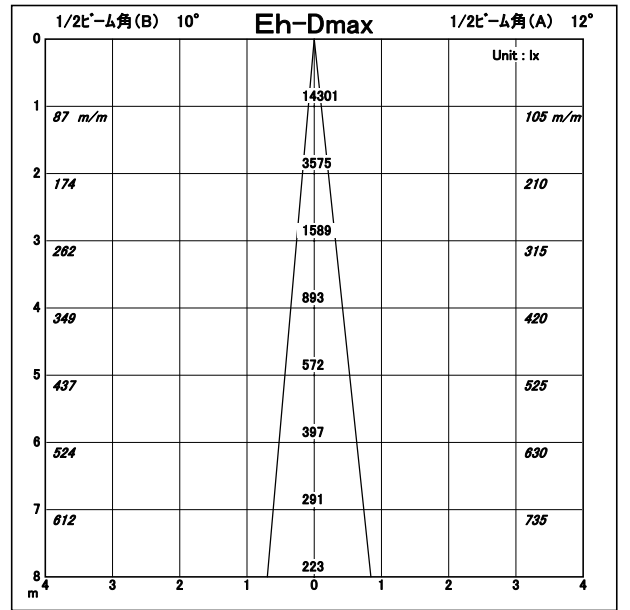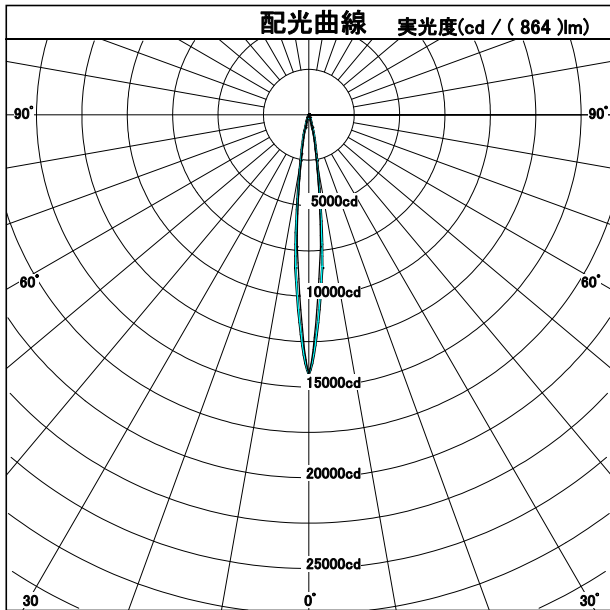

照明率表		平均照度=台数 * 照明率 * 保守率 * 864 (光束)/(間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	1.00	0.97	0.96	0.99	0.97	0.95	0.99	0.97	0.95	0.98	0.96	0.95	0.94
	0.70	1.03	1.00	0.98	1.02	0.99	0.98	1.01	0.99	0.97	1.00	0.98	0.97	0.96
	1.00	1.06	1.03	1.01	1.04	1.02	1.00	1.03	1.01	0.99	1.01	1.00	0.99	0.97
	1.25	1.08	1.05	1.03	1.06	1.03	1.02	1.04	1.02	1.01	1.02	1.01	1.00	0.98
	1.50	1.09	1.06	1.04	1.07	1.05	1.03	1.05	1.03	1.02	1.03	1.01	1.00	0.99
指	2.00	1.11	1.09	1.07	1.08	1.06	1.05	1.06	1.04	1.03	1.03	1.02	1.01	0.99
	2.50	1.12	1.10	1.08	1.09	1.08	1.06	1.06	1.05	1.04	1.04	1.03	1.02	0.99
	3.00	1.14	1.12	1.10	1.10	1.09	1.07	1.07	1.06	1.05	1.04	1.03	1.02	1.00
	4.00	1.15	1.13	1.12	1.11	1.10	1.09	1.08	1.07	1.06	1.04	1.04	1.03	1.00
数	5.00	1.16	1.14	1.13	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.04	1.03	1.00
	7.00	1.17	1.16	1.15	1.13	1.12	1.11	1.08	1.08	1.07	1.05	1.04	1.04	1.00
	10.00	1.18	1.17	1.16	1.13	1.13	1.12	1.09	1.08	1.08	1.05	1.04	1.04	1.01