



配光特性

図番 6287_14



カタログ番号	708RM03/6287/40/DA		
使用ランプ	LED12W		
ランプ光束	444.0	lm	1.000
最大光度	1401.1 cd		
1/2ビーム角			
A断面	33.00 °		
C断面			
B断面			

	角度	光度
	0°	1401
	10°	1146
	20°	413
	30°	57
	40°	9
	50°	3
	60°	1
	70°	1
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

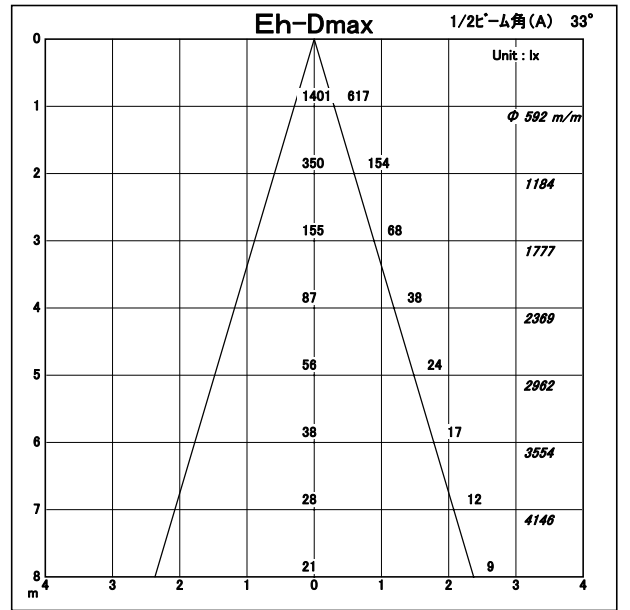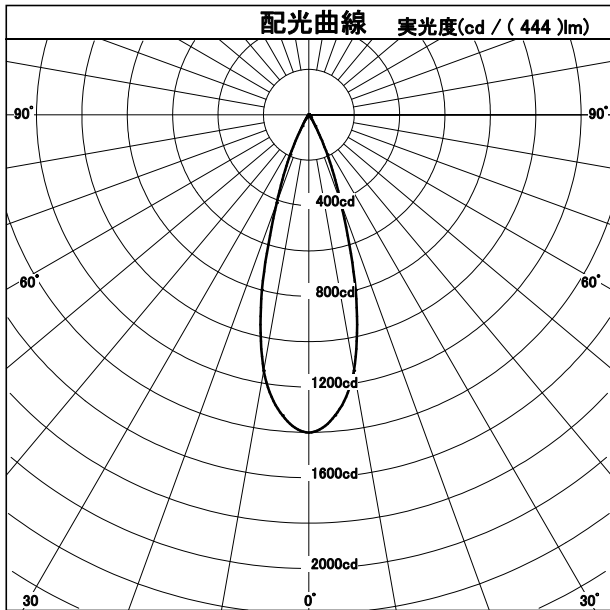

照明率表		平均照度=台数 * 照明率 * 保守率 * 444 (光束) / (間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.84	0.80	0.78	0.83	0.80	0.77	0.83	0.79	0.77	0.82	0.79	0.77	0.76
	0.70	0.92	0.88	0.85	0.90	0.87	0.84	0.89	0.86	0.84	0.88	0.86	0.84	0.83
	1.00	0.98	0.94	0.91	0.97	0.93	0.91	0.95	0.92	0.90	0.94	0.91	0.89	0.88
	1.25	1.02	0.98	0.95	1.00	0.96	0.94	0.98	0.95	0.93	0.96	0.94	0.92	0.90
	1.50	1.04	1.01	0.98	1.02	0.99	0.97	1.00	0.97	0.95	0.98	0.96	0.94	0.92
指	2.00	1.07	1.04	1.02	1.05	1.02	1.00	1.02	1.00	0.98	0.99	0.98	0.96	0.94
	2.50	1.10	1.07	1.04	1.06	1.04	1.02	1.03	1.02	1.00	1.01	0.99	0.98	0.96
	3.00	1.11	1.09	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	1.00	0.99	0.96
	4.00	1.13	1.11	1.09	1.09	1.08	1.06	1.06	1.04	1.03	1.02	1.01	1.00	0.98
	5.00	1.14	1.13	1.11	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.02	1.01	0.98
数	7.00	1.16	1.15	1.13	1.12	1.10	1.09	1.07	1.07	1.06	1.04	1.03	1.02	0.99
	10.00	1.17	1.16	1.15	1.12	1.12	1.11	1.08	1.07	1.07	1.04	1.04	1.03	1.00