


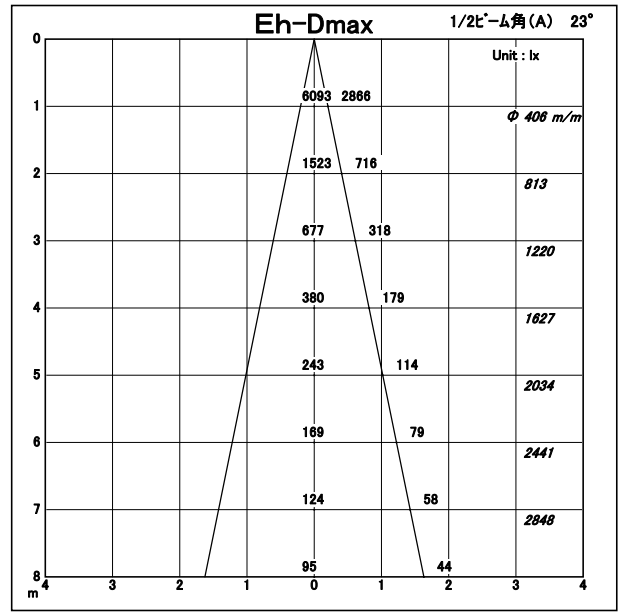
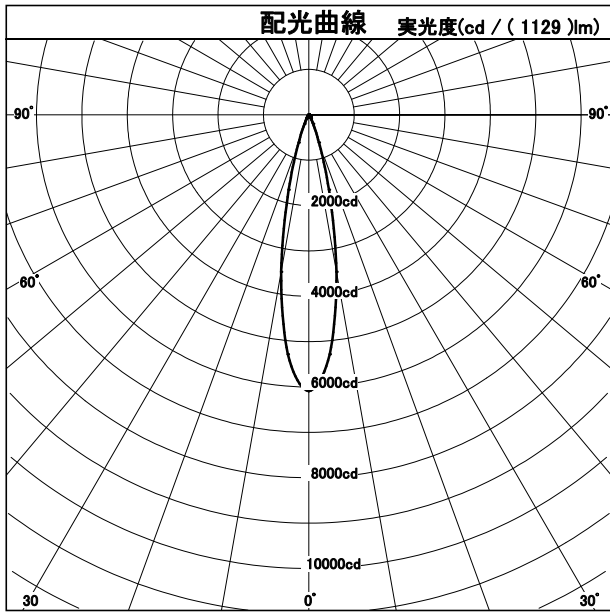
# 配光特性

図番 6275\_14A



カタログ番号	708RM03/6275/40ADA		
使用ランプ	LED16W		
ランプ光束	1129.0	lm	1.000
最大光度	6093.3 cd		
1/2ビーム角	23.00 °		
A断面	23.00 °		
C断面			
B断面			

	角度	光度
	0°	6093
	10°	3515
	20°	652
	30°	93
	40°	43
	50°	19
	60°	4
	70°	2
	80°	1
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	



照明率表														平均照度=台数 * 照明率 * 保守率 * 1129 (光束)/(間口 * 奥行)		
床面反射率(%)		20										0				
天井面反射率(%)		80			60			40			20			0		
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0		
室	0.50	0.88	0.85	0.83	0.88	0.85	0.82	0.87	0.84	0.82	0.86	0.84	0.82	0.81		
	0.70	0.94	0.91	0.88	0.93	0.90	0.88	0.92	0.89	0.87	0.91	0.89	0.87	0.86		
	1.00	1.00	0.96	0.93	0.98	0.95	0.93	0.96	0.94	0.92	0.95	0.93	0.91	0.90		
	1.25	1.02	0.99	0.96	1.00	0.98	0.95	0.99	0.96	0.94	0.97	0.95	0.93	0.92		
	1.50	1.05	1.01	0.99	1.02	1.00	0.97	1.00	0.98	0.96	0.98	0.96	0.95	0.93		
指	2.00	1.07	1.05	1.02	1.05	1.02	1.00	1.02	1.00	0.99	1.00	0.98	0.97	0.95		
	2.50	1.09	1.07	1.05	1.06	1.04	1.02	1.03	1.02	1.00	1.00	0.99	0.98	0.96		
	3.00	1.11	1.08	1.06	1.07	1.05	1.04	1.04	1.03	1.01	1.01	1.00	0.99	0.96		
	4.00	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	1.00	0.97		
	5.00	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.02	1.02	1.01	0.98		
数	7.00	1.15	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.02	0.98		
	10.00	1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.07	1.06	1.03	1.03	1.02	0.99		