



カタログ番号	708IS03/8132/00/DA		
使用ランプ	LED14W		
ランプ光束	746.0	lm	1.000
最大光度	474.2	cd	
1/2ビーム角	82.00 °		
A断面	82.00 °		
C断面			
B断面			

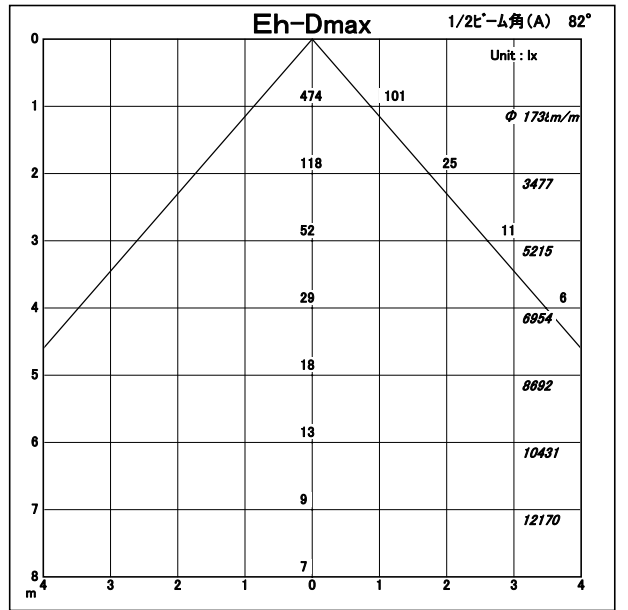

	角度	光度
	0°	474
	10°	447
	20°	344
	30°	282
	40°	245
	50°	167
	60°	51
	70°	4
	80°	2
	90°	1
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

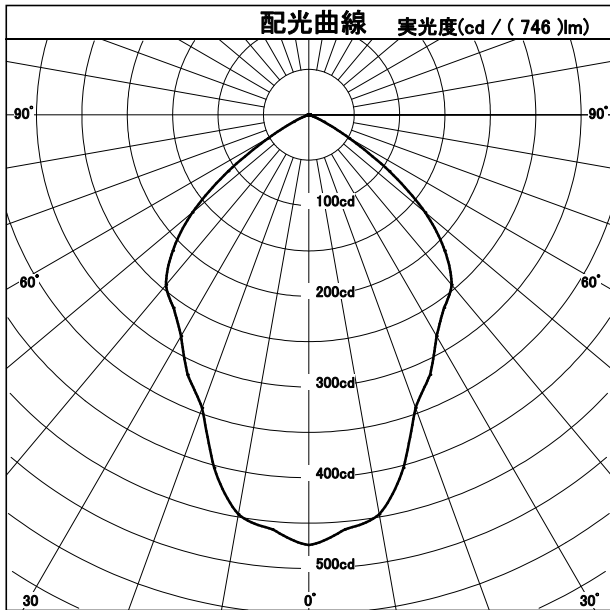

照明率表		平均照度=台数 * 照明率 * 保守率 * 746 (光束) / (間口 * 奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.35	0.44	0.39	0.35	0.33
	0.70	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.57	0.52	0.48	0.46
	1.00	0.75	0.68	0.63	0.73	0.67	0.62	0.72	0.66	0.62	0.70	0.65	0.61	0.59
	1.25	0.83	0.76	0.71	0.81	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66
	1.50	0.88	0.82	0.77	0.85	0.80	0.76	0.83	0.78	0.75	0.81	0.77	0.74	0.71
指	2.00	0.95	0.90	0.85	0.92	0.87	0.84	0.89	0.85	0.82	0.86	0.83	0.80	0.78
	2.50	0.99	0.95	0.91	0.96	0.92	0.89	0.93	0.89	0.87	0.90	0.87	0.85	0.82
	3.00	1.02	0.98	0.94	0.99	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.87	0.85
	4.00	1.06	1.03	1.00	1.02	0.99	0.97	0.99	0.96	0.94	0.95	0.93	0.92	0.88
数	5.00	1.09	1.06	1.03	1.05	1.02	1.00	1.01	0.99	0.97	0.97	0.95	0.94	0.91
	7.00	1.12	1.09	1.07	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.98	0.97	0.93
	10.00	1.14	1.12	1.11	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.95