



配光特性

図番 YL210088



カタログ番号	T531D(B・W)
使用ランプ	
器具光束	1554.0 lm <small>1.000</small>
最大光度	18811.2 cd
1 / 2 ビーム角	
A 断面	14.00 °
C 断面	
B 断面	

	角度	光度
	0°	18811
	10°	4642
	20°	280
	30°	88
	40°	52
	50°	33
	60°	24
	70°	17
	80°	14
	90°	14
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
160°	0	
170°	0	
180°	0	

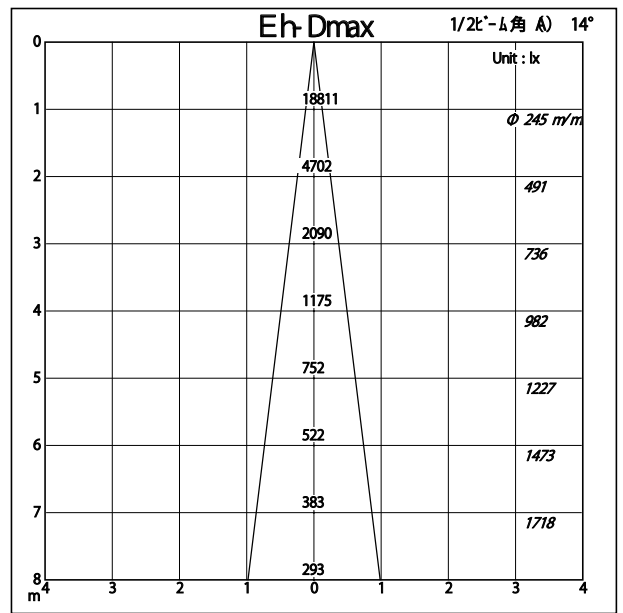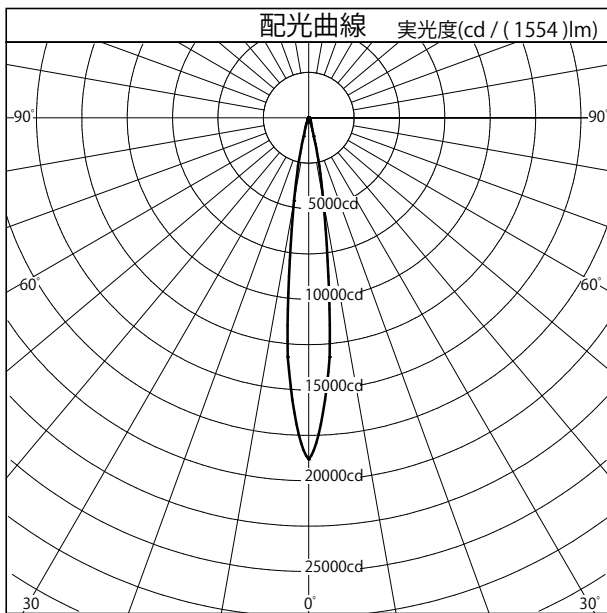

照明率表		平均照度=台数*照明率*保守率* 1554 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.94	0.91	0.89	0.93	0.91	0.89	0.93	0.90	0.89	0.92	0.90	0.88	0.88
	0.70	0.98	0.95	0.92	0.97	0.94	0.92	0.96	0.93	0.91	0.95	0.93	0.91	0.90
	1.00	1.02	0.99	0.96	1.00	0.97	0.95	0.99	0.96	0.94	0.97	0.95	0.94	0.92
	1.25	1.04	1.01	0.98	1.02	1.00	0.97	1.01	0.98	0.96	0.99	0.97	0.95	0.94
	1.50	1.06	1.03	1.00	1.04	1.01	0.99	1.02	1.00	0.98	1.00	0.98	0.96	0.95
指	2.00	1.09	1.06	1.04	1.06	1.04	1.02	1.03	1.01	1.00	1.01	0.99	0.98	0.96
	2.50	1.11	1.08	1.06	1.08	1.05	1.04	1.05	1.03	1.01	1.02	1.00	0.99	0.97
	3.00	1.12	1.10	1.08	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.01	1.00	0.97
	4.00	1.14	1.12	1.10	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	0.98
	5.00	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	0.99
数	7.00	1.17	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.04	1.03	0.99
	10.00	1.18	1.17	1.16	1.13	1.12	1.12	1.09	1.08	1.07	1.05	1.04	1.04	1.00