



# 配光特性

図番 YL220119



カタログ番号	K4635W
使用ランプ	LED32.5W
器具光束	4772.0 lm <small>1,000</small>
器具効率	
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	2289
	10°	2715
	20°	3137
	30°	3983
	40°	4332
	50°	3534
	60°	1787
	70°	463
	80°	90
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

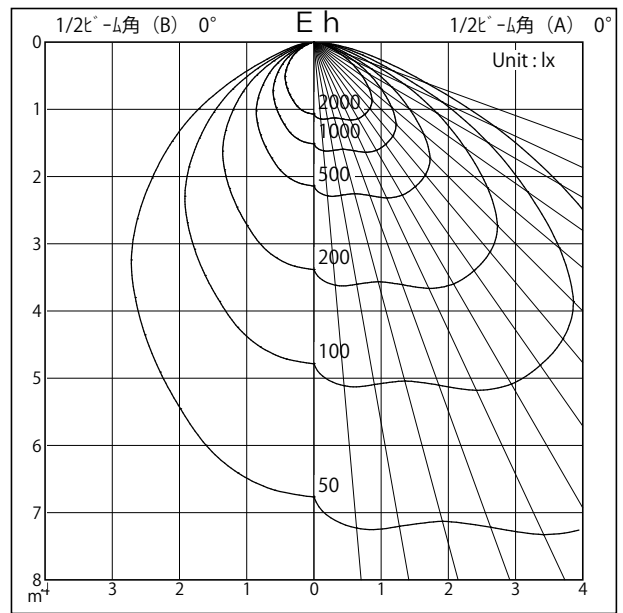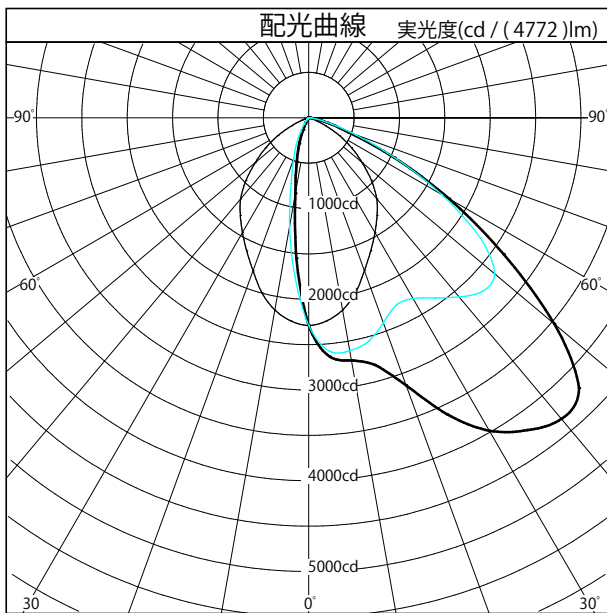

照明率表		平均照度=台数×照明率×保守率×4772(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.40	0.32	0.27	0.39	0.32	0.27	0.38	0.31	0.26	0.37	0.31	0.26	0.25
	0.70	0.53	0.45	0.39	0.52	0.44	0.39	0.50	0.43	0.38	0.49	0.43	0.38	0.36
	1.00	0.68	0.60	0.54	0.66	0.58	0.53	0.64	0.57	0.52	0.62	0.56	0.52	0.50
	1.25	0.76	0.68	0.62	0.74	0.67	0.62	0.71	0.65	0.61	0.69	0.64	0.60	0.58
	1.50	0.82	0.75	0.69	0.79	0.73	0.68	0.77	0.71	0.67	0.74	0.70	0.66	0.63
指	2.00	0.90	0.84	0.79	0.87	0.82	0.77	0.84	0.80	0.76	0.81	0.78	0.74	0.72
	2.50	0.96	0.90	0.85	0.92	0.87	0.83	0.89	0.85	0.81	0.86	0.82	0.79	0.77
	3.00	0.99	0.94	0.89	0.95	0.91	0.87	0.92	0.88	0.85	0.88	0.86	0.83	0.80
	4.00	1.04	1.00	0.96	1.00	0.96	0.93	0.96	0.93	0.91	0.92	0.90	0.88	0.85
数	5.00	1.07	1.03	1.00	1.02	1.00	0.97	0.98	0.96	0.94	0.95	0.93	0.91	0.88
	7.00	1.10	1.07	1.05	1.06	1.03	1.01	1.01	1.00	0.98	0.97	0.96	0.95	0.91
	10.00	1.13	1.11	1.09	1.08	1.06	1.05	1.04	1.02	1.01	0.99	0.98	0.97	0.94