



配光特性

図番 YL230071



カタログ番号	K4636B
使用ランプ	LED 14.9W
器具光束	2457.0 lm <small>1,000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

	角度	光度
	0°	1192
	10°	1637
	20°	2020
	30°	2361
	40°	2404
	50°	1651
	60°	929
	70°	251
	80°	42
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

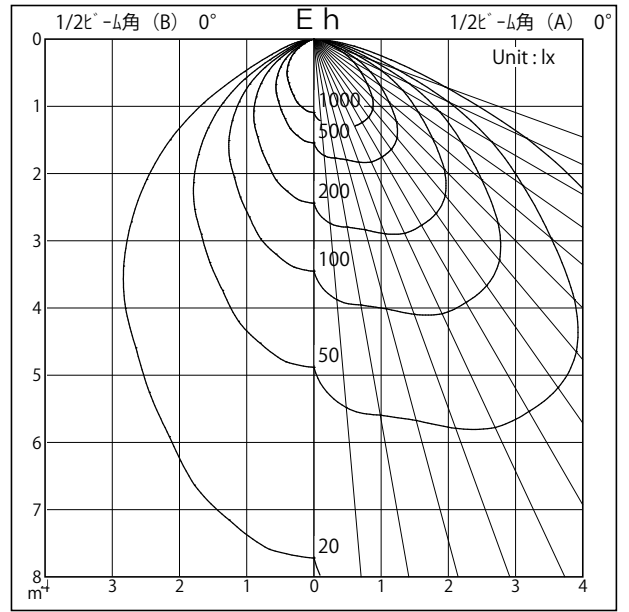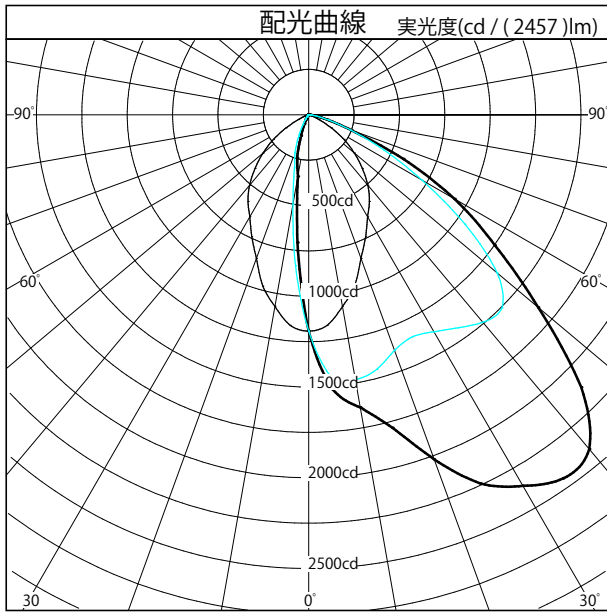

照明率表		平均照度=台数×照明率×保守率×2457(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.41	0.33	0.28	0.40	0.33	0.28	0.39	0.32	0.28	0.38	0.32	0.28	0.26
	0.70	0.55	0.46	0.41	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.40	0.38
	1.00	0.69	0.61	0.55	0.67	0.60	0.55	0.65	0.59	0.54	0.63	0.58	0.54	0.51
	1.25	0.77	0.70	0.64	0.75	0.68	0.63	0.73	0.67	0.62	0.70	0.66	0.61	0.59
	1.50	0.83	0.76	0.71	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.67	0.65
指	2.00	0.91	0.85	0.80	0.88	0.83	0.78	0.85	0.81	0.77	0.82	0.79	0.75	0.73
	2.50	0.96	0.91	0.86	0.93	0.88	0.84	0.89	0.86	0.82	0.86	0.83	0.80	0.78
	3.00	1.00	0.95	0.90	0.96	0.92	0.88	0.92	0.89	0.86	0.89	0.86	0.84	0.81
	4.00	1.04	1.00	0.97	1.00	0.97	0.94	0.96	0.94	0.91	0.93	0.91	0.89	0.86
数	5.00	1.07	1.04	1.01	1.03	1.00	0.97	0.99	0.97	0.94	0.95	0.93	0.92	0.88
	7.00	1.10	1.08	1.05	1.06	1.04	1.02	1.02	1.00	0.98	0.98	0.96	0.95	0.92
	10.00	1.13	1.11	1.09	1.08	1.07	1.05	1.04	1.02	1.01	1.00	0.99	0.98	0.94