


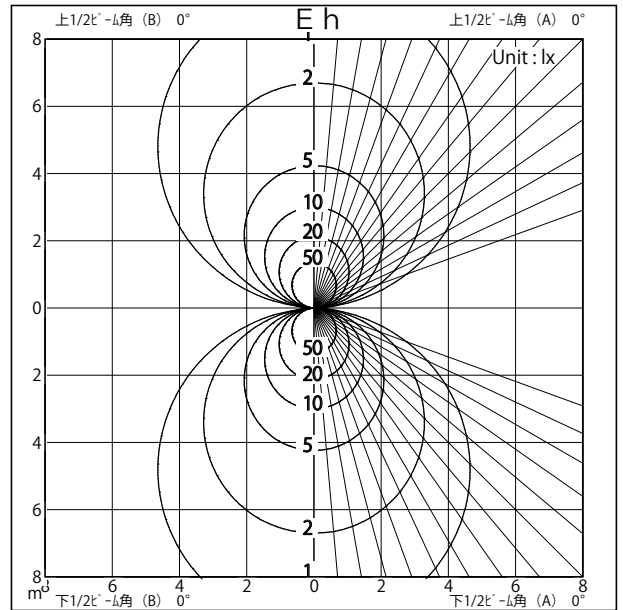
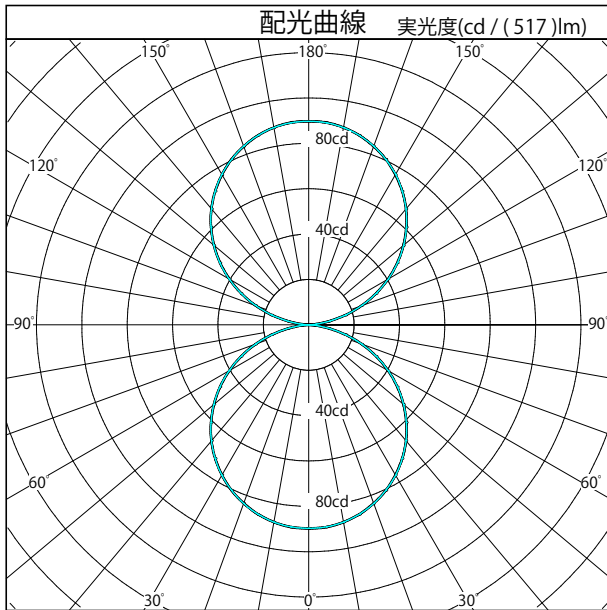
# 配光特性

図番 YL220017



カタログ番号	K4639(B・W)	
使用ランプ		
器具光束	517.0 lm <sub>1,000</sub>	
器具効率	100.0 %	
下方効率	50.0 %	
上方効率	50.0 %	
最大取付間隔	下方向	上方向
A断面		
C断面		
B断面		

	角度	光度
	0°	90
	10°	88
	20°	84
	30°	76
	40°	67
	50°	55
	60°	40
	70°	25
	80°	9
	90°	0
	100°	9
	110°	25
	120°	40
	130°	55
	140°	67
	150°	76
	160°	84
170°	88	
180°	90	



照明率表		平均照度=台数×照明率×保守率×517(光束)/(間口×奥行)													
床面反射率 (%)		20												0	
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.33	0.26	0.21	0.29	0.23	0.19	0.25	0.20	0.17	0.21	0.17	0.14	0.11	
	0.70	0.44	0.36	0.31	0.38	0.32	0.27	0.33	0.28	0.24	0.27	0.23	0.21	0.16	
	1.00	0.57	0.49	0.43	0.49	0.42	0.38	0.41	0.37	0.33	0.35	0.31	0.28	0.22	
	1.25	0.64	0.56	0.50	0.55	0.49	0.44	0.47	0.42	0.38	0.39	0.35	0.33	0.26	
	1.50	0.69	0.62	0.56	0.60	0.54	0.49	0.50	0.46	0.43	0.42	0.39	0.36	0.29	
	指	2.00	0.77	0.70	0.65	0.66	0.61	0.57	0.56	0.52	0.49	0.46	0.44	0.41	0.33
		2.50	0.82	0.76	0.71	0.70	0.66	0.62	0.59	0.56	0.53	0.49	0.47	0.45	0.36
		3.00	0.86	0.80	0.76	0.73	0.69	0.66	0.62	0.59	0.56	0.51	0.49	0.47	0.38
		4.00	0.91	0.86	0.82	0.77	0.74	0.71	0.65	0.63	0.61	0.54	0.52	0.51	0.41
	数	5.00	0.94	0.90	0.86	0.80	0.77	0.74	0.67	0.65	0.63	0.55	0.54	0.53	0.42
7.00		0.97	0.94	0.92	0.83	0.81	0.79	0.70	0.68	0.67	0.57	0.56	0.55	0.44	
10.00		1.00	0.98	0.96	0.85	0.84	0.82	0.71	0.70	0.69	0.59	0.58	0.57	0.46	