



# 配光特性

図番 YL210275



カタログ番号	J563BN	
使用ランプ		
器具光束	1243.0	lm <sub>1.000</sub>
器具効率	100.0 %	
下方効率	100.0 %	
上方効率	0.0 %	
最大取付間隔		
A断面	0.77 H	
C断面		
B断面		

	角度	光度
	0°	2063
	10°	1811
	20°	1367
	30°	411
	40°	76
	50°	23
	60°	18
	70°	16
	80°	14
	90°	14
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

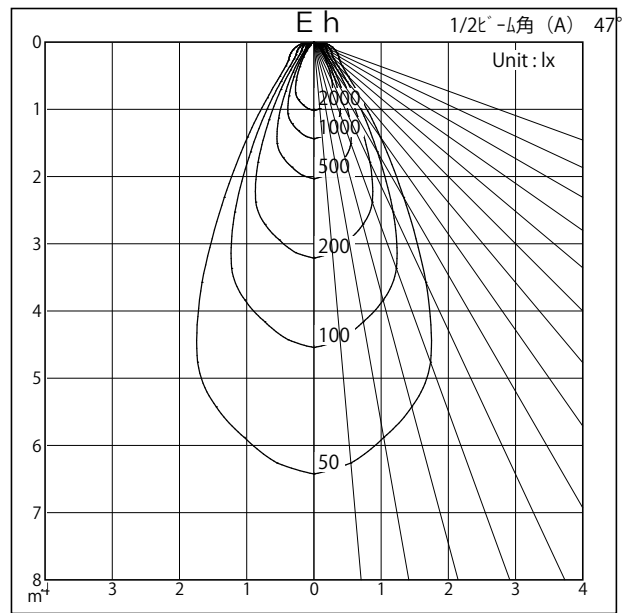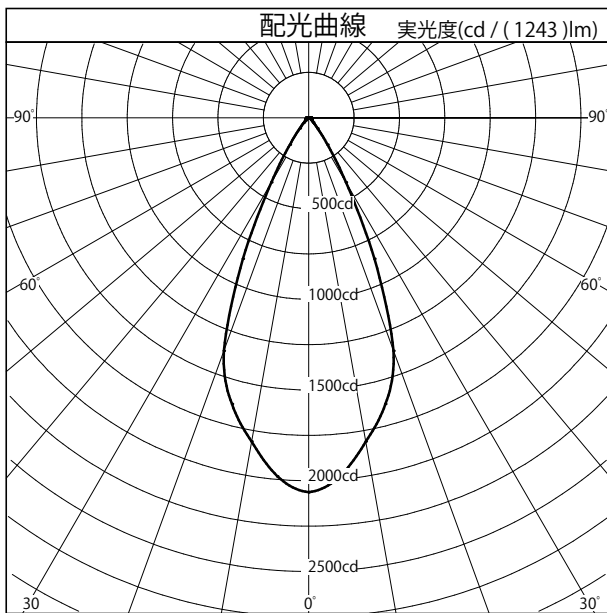

照明率表		平均照度=台数×照明率×保守率×1243(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	
室 指 数	0.50	0.70	0.65	0.62	0.70	0.65	0.62	0.69	0.64	0.61	0.68	0.64	0.61	0.60
	0.70	0.81	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.77	0.73	0.71	0.69
	1.00	0.90	0.85	0.81	0.88	0.84	0.80	0.86	0.83	0.80	0.85	0.81	0.79	0.77
	1.25	0.95	0.90	0.86	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81
	1.50	0.98	0.93	0.90	0.95	0.92	0.88	0.93	0.90	0.87	0.91	0.88	0.86	0.84
	2.00	1.03	0.98	0.95	0.99	0.96	0.93	0.97	0.94	0.91	0.94	0.92	0.90	0.87
	2.50	1.05	1.02	0.99	1.02	0.99	0.96	0.99	0.96	0.94	0.96	0.94	0.92	0.90
	3.00	1.07	1.04	1.01	1.04	1.01	0.99	1.00	0.98	0.96	0.97	0.95	0.94	0.91
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.03	1.01	0.99	0.99	0.98	0.96	0.93
	5.00	1.12	1.10	1.07	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
数	7.00	1.14	1.12	1.11	1.10	1.08	1.07	1.05	1.04	1.03	1.01	1.00	1.00	0.96
	10.00	1.16	1.14	1.13	1.11	1.10	1.09	1.06	1.06	1.05	1.02	1.02	1.01	0.97