



配光特性

図番 YL210281



カタログ番号	J564DW	
使用ランプ		
器具光束	1216.0	lm _{1.000}
器具効率	100.0 %	
下方効率	100.0 %	
上方効率	0.0 %	
最大取付間隔		
A断面	0.77 H	
C断面		
B断面		

	角度	光度
	0°	1199
	10°	1078
	20°	775
	30°	469
	40°	242
	50°	126
	60°	72
	70°	48
	80°	31
	90°	19
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

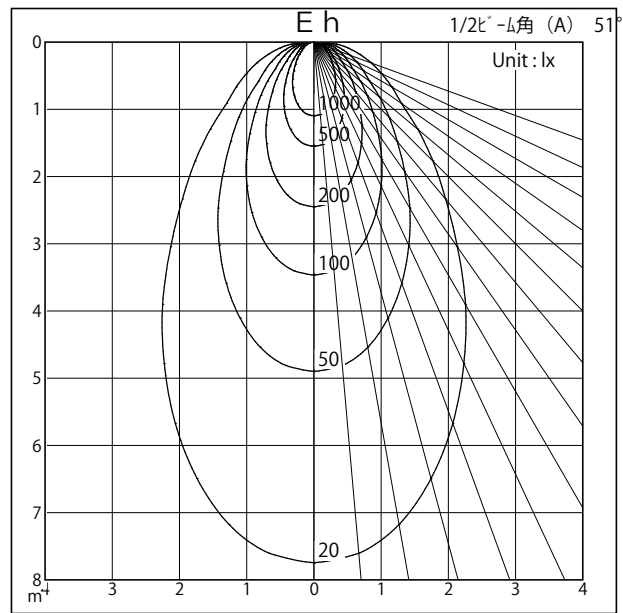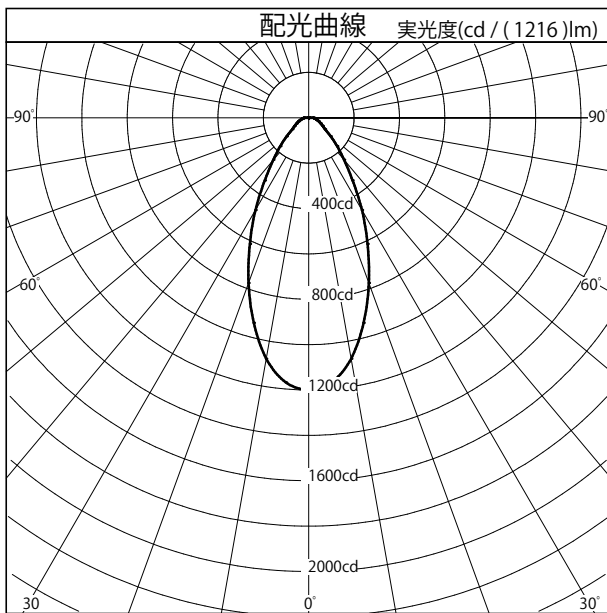

照明率表		平均照度=台数×照明率×保守率×1216(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.52	0.47	0.43	0.41
	0.70	0.66	0.59	0.54	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52
	1.00	0.78	0.71	0.66	0.76	0.70	0.65	0.74	0.69	0.65	0.72	0.68	0.64	0.62
	1.25	0.84	0.77	0.72	0.81	0.76	0.71	0.79	0.74	0.71	0.77	0.73	0.70	0.67
	1.50	0.88	0.82	0.77	0.86	0.80	0.76	0.83	0.79	0.75	0.81	0.77	0.74	0.72
指	2.00	0.95	0.89	0.85	0.91	0.87	0.83	0.88	0.85	0.81	0.86	0.82	0.80	0.77
	2.50	0.99	0.94	0.89	0.95	0.91	0.87	0.92	0.88	0.85	0.89	0.86	0.83	0.81
	3.00	1.01	0.97	0.93	0.98	0.94	0.90	0.94	0.91	0.88	0.91	0.88	0.86	0.83
	4.00	1.05	1.02	0.98	1.01	0.98	0.95	0.97	0.95	0.93	0.94	0.92	0.90	0.87
	5.00	1.08	1.04	1.02	1.03	1.01	0.98	0.99	0.97	0.95	0.96	0.94	0.92	0.89
数	7.00	1.11	1.08	1.06	1.06	1.04	1.02	1.02	1.00	0.98	0.98	0.96	0.95	0.92
	10.00	1.13	1.11	1.09	1.08	1.06	1.05	1.04	1.02	1.01	0.99	0.98	0.97	0.94