



# 配光特性

図番 YL210291

カタログ番号	J567BN
使用ランプ	
ランプ光束	693.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	



角度	光度
0°	428
10°	463
20°	531
30°	510
40°	402
50°	253
60°	147
70°	93
80°	44
90°	12
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

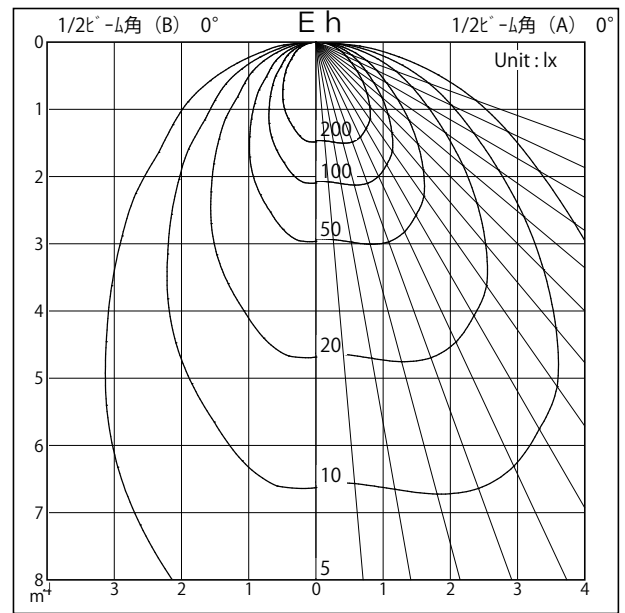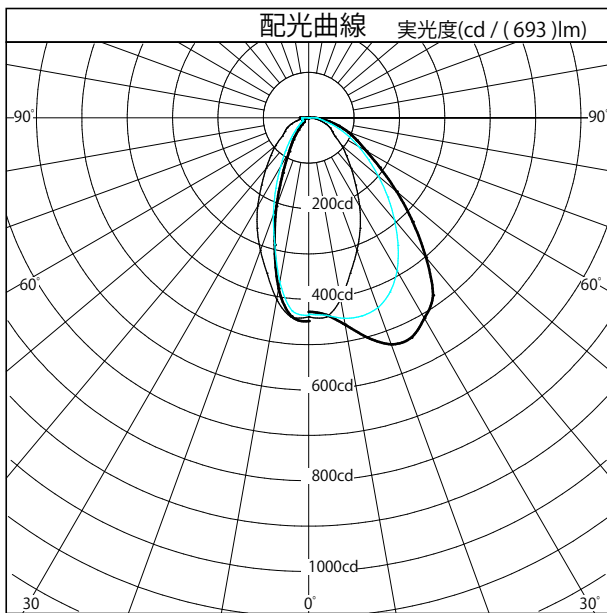

(m)	壁面照度分布							単灯			連灯			
	0.50	1.00	1.50	2.00	2.50	3.00	(m)	0.50	1.00	1.50	2.00	2.50	3.00	3.50
0.50	91	62	21	7	3	1	1	140	142	140				
1.00	115	78	31	12	5	2	1	191	186	191				
1.50	83	62	30	13	6	3	2	160	159	160				
2.00	47	40	23	12	6	3	2	112	114	112				
2.50	27	24	17	10	6	3	2	78	79	78				
3.00	17	15	12	8	5	3	2	56	57	56				
3.50	11	10	8	6	4	3	2	41	42	41				

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

単位: lx (m)