



配光特性

図番 YL210292



カタログ番号	J567CN
使用ランプ	
器具光束	732.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	453
10°	490
20°	562
30°	539
40°	425
50°	268
60°	156
70°	99
80°	47
90°	12
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

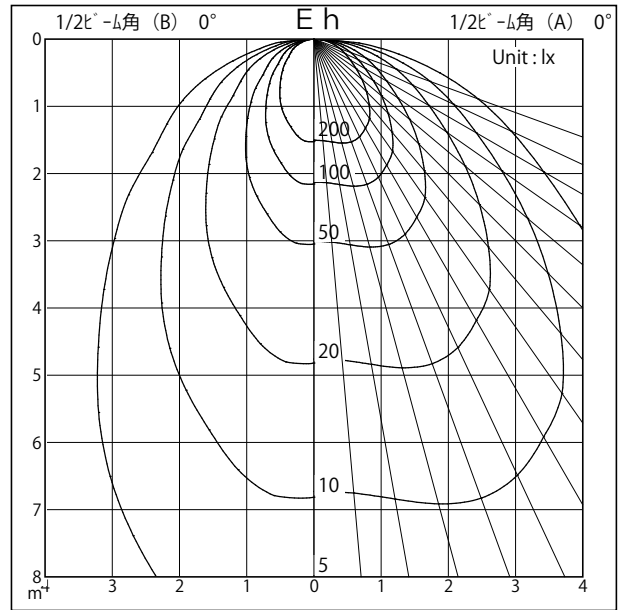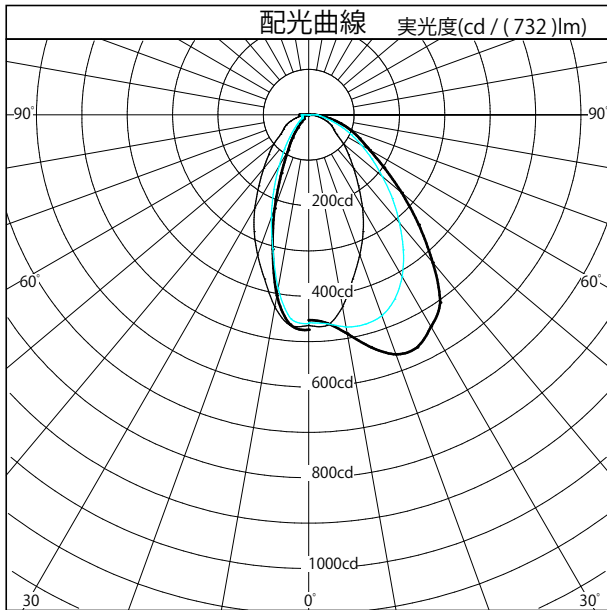

(m)	壁面照度分布 単灯							連灯				
	0.50	1.00	1.50	2.00	2.50	3.00	0.50	1.00	1.50	2.00	2.50	3.00
0.50	96	66	22	7	3	1	1	148	151	148		
1.00	121	83	33	12	5	2	1	202	197	202		
1.50	88	66	32	14	6	3	2	169	168	169		
2.00	50	42	25	13	7	3	2	118	120	118		
2.50	29	26	18	10	6	3	2	83	84	83		
3.00	17	16	12	8	5	3	2	59	60	59		
3.50	11	11	9	6	4	3	2	44	44	44		

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

単位: lx (m)