



配光特性

図番 YL210293



カタログ番号	J567DN
使用ランプ	
器具光束	735.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	454
10°	492
20°	564
30°	541
40°	427
50°	269
60°	156
70°	99
80°	47
90°	12
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

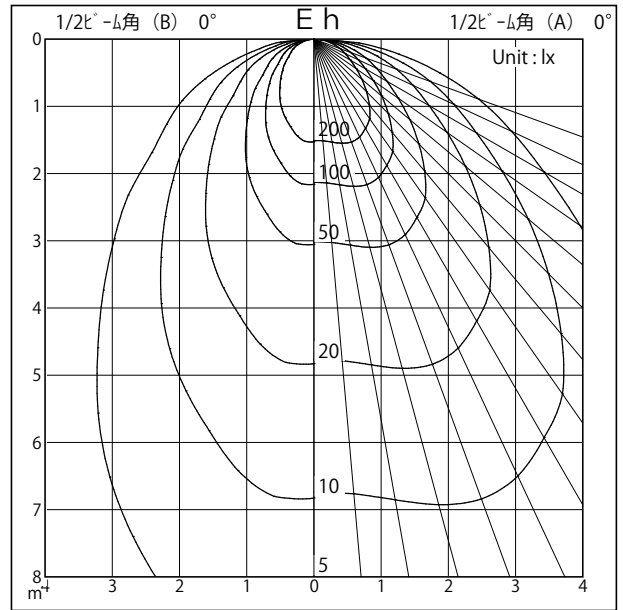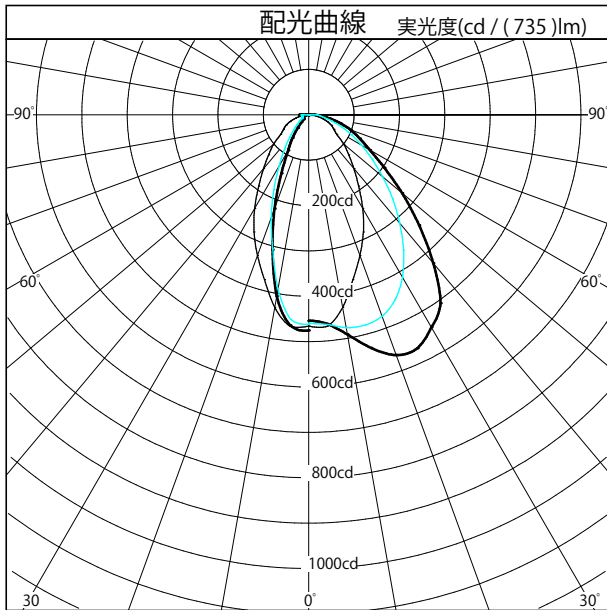

(m)	壁面照度分布							単灯			連灯			
	0.50	1.00	1.50	2.00	2.50	3.00	(m)	0.50	1.00	1.50	2.00	2.50	3.00	3.50
0.50	96	66	22	7	3	1	1	148	151	148				
1.00	122	83	33	12	5	2	1	203	198	203				
1.50	88	66	32	14	6	3	2	170	169	170				
2.00	50	42	25	13	7	3	2	119	121	119				
2.50	29	26	18	11	6	4	2	83	84	83				
3.00	18	16	12	8	5	3	2	60	60	60				
3.50	11	11	9	6	4	3	2	44	44	44				

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

単位: lx (m)