



# 配光特性

図番 YL210026



カタログ番号	J568DN
使用ランプ	
器具光束	2239.0 lm <sub>1.000</sub>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.48 H
C断面	
B断面	

	角度	光度
	0°	8040
	10°	5841
	20°	1962
	30°	207
	40°	44
	50°	33
	60°	29
	70°	26
	80°	23
	90°	22
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

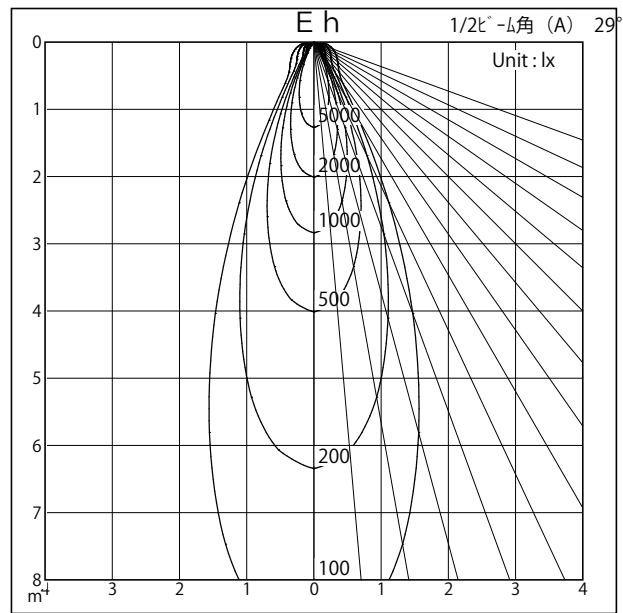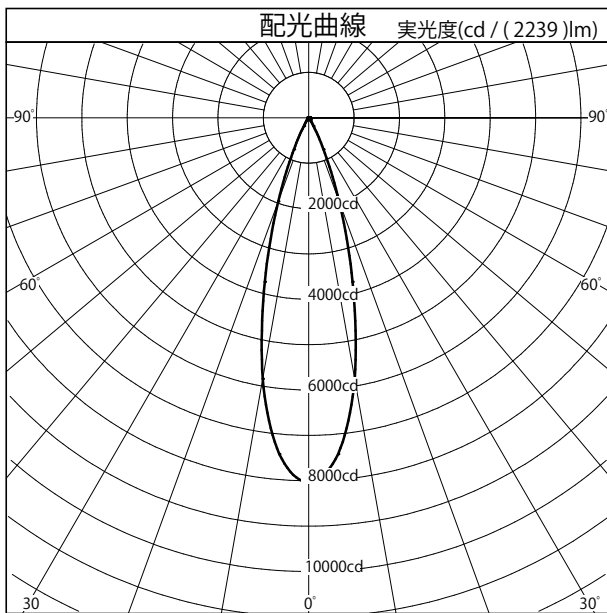

照明率表		平均照度=台数×照明率×保守率×2239(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.83	0.79	0.76	0.82	0.78	0.76	0.81	0.78	0.76	0.81	0.78	0.76	0.75
	0.70	0.90	0.86	0.83	0.89	0.85	0.82	0.88	0.84	0.82	0.87	0.84	0.82	0.80
	1.00	0.96	0.92	0.89	0.95	0.91	0.88	0.93	0.90	0.88	0.91	0.89	0.87	0.85
	1.25	1.00	0.96	0.93	0.98	0.94	0.92	0.96	0.93	0.90	0.94	0.91	0.89	0.88
	1.50	1.02	0.98	0.95	1.00	0.97	0.94	0.98	0.95	0.93	0.95	0.93	0.91	0.89
指	2.00	1.06	1.02	0.99	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.96	0.94	0.92
	2.50	1.08	1.05	1.02	1.05	1.02	1.00	1.02	1.00	0.98	0.99	0.97	0.96	0.93
	3.00	1.10	1.07	1.04	1.06	1.04	1.02	1.03	1.01	0.99	1.00	0.98	0.97	0.94
	4.00	1.12	1.09	1.07	1.08	1.06	1.04	1.04	1.03	1.01	1.01	1.00	0.99	0.96
	5.00	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	1.00	0.96
数	7.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.02	1.01	0.97
	10.00	1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.06	1.06	1.03	1.03	1.02	0.98