



配光特性

図番 YL210031



カタログ番号	J570AW
使用ランプ	
器具光束	1596.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.76 H
C断面	
B断面	

	角度	光度
	0°	1620
	10°	1449
	20°	1026
	30°	607
	40°	327
	50°	170
	60°	94
	70°	59
	80°	34
	90°	17
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

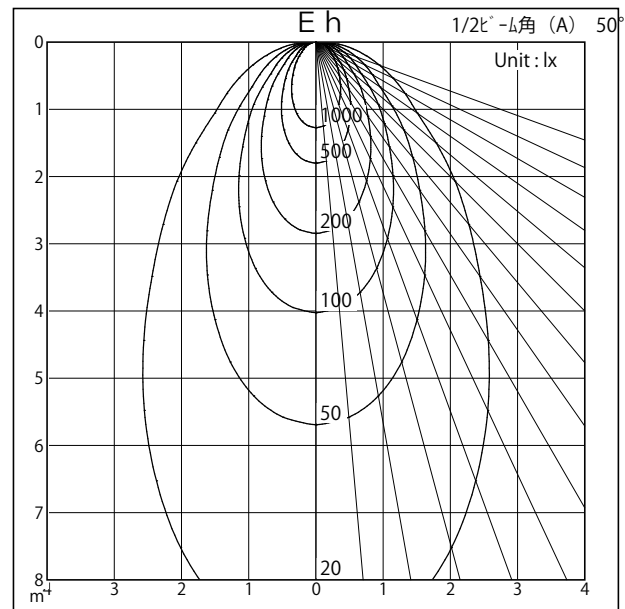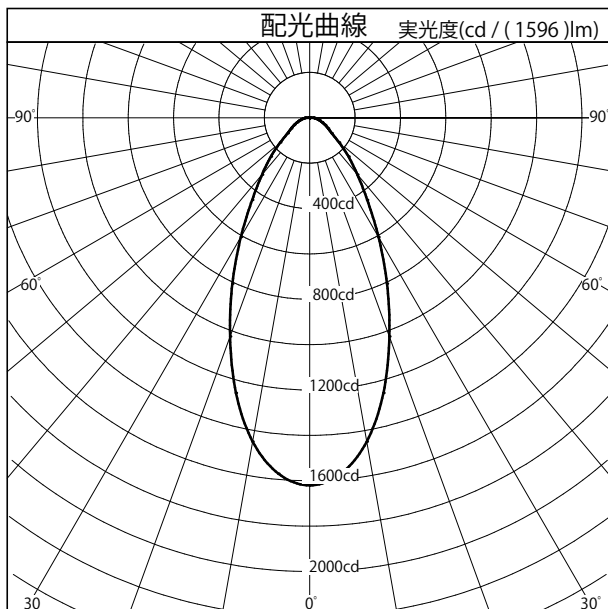

照明率表		平均照度=台数×照明率×保守率×1596(光束)/(間口×奥行)												
床面反射率 (%)		20												0
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.55	0.48	0.44	0.54	0.48	0.44	0.53	0.47	0.44	0.52	0.47	0.43	0.42
	0.70	0.67	0.60	0.55	0.65	0.59	0.55	0.64	0.58	0.54	0.63	0.58	0.54	0.52
	1.00	0.78	0.72	0.67	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.68	0.65	0.63
	1.25	0.84	0.78	0.73	0.82	0.77	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.68
	1.50	0.89	0.83	0.78	0.86	0.81	0.77	0.84	0.79	0.76	0.82	0.78	0.75	0.72
指	2.00	0.95	0.90	0.85	0.92	0.87	0.84	0.89	0.85	0.82	0.86	0.83	0.81	0.78
	2.50	0.99	0.94	0.90	0.96	0.92	0.88	0.92	0.89	0.86	0.89	0.87	0.84	0.82
	3.00	1.02	0.97	0.94	0.98	0.94	0.91	0.95	0.92	0.89	0.91	0.89	0.87	0.84
	4.00	1.06	1.02	0.99	1.02	0.99	0.96	0.98	0.95	0.93	0.94	0.92	0.91	0.88
	5.00	1.08	1.05	1.02	1.04	1.01	0.99	1.00	0.98	0.96	0.96	0.95	0.93	0.90
数	7.00	1.11	1.09	1.06	1.06	1.04	1.03	1.02	1.01	0.99	0.98	0.97	0.96	0.92
	10.00	1.13	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.00	0.99	0.98	0.94