



# 配光特性

図番 YL210296



カタログ番号	J571CN
使用ランプ	
器具光束	1455.0 lm <small>1.000</small>
最大光度	18901.9 cd
1 / 2 ビーム角	
A 断面	15.00°
C 断面	
B 断面	

	角度	光度
	0°	18902
	10°	4912
	20°	254
	30°	58
	40°	27
	50°	24
	60°	22
	70°	16
	80°	13
	90°	12
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

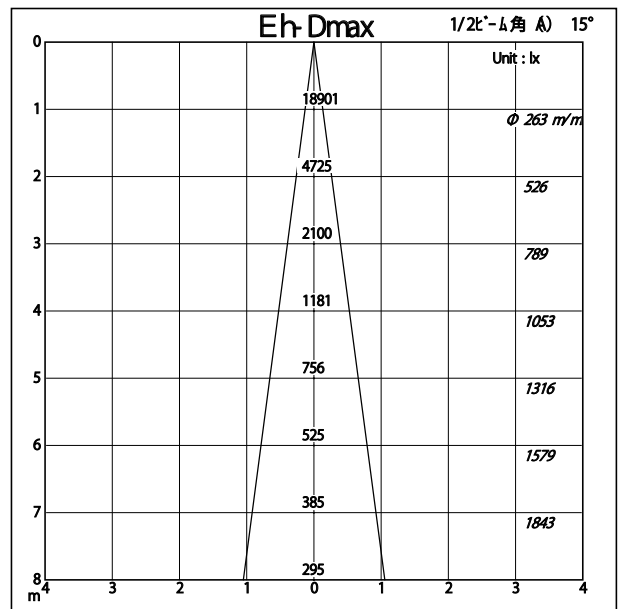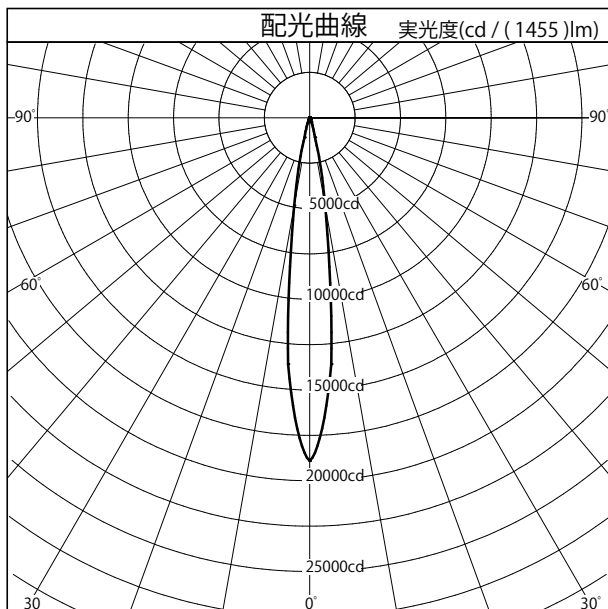

照明率表		平均照度=台数*照明率*保守率* 1455 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		80			60			40			20			
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	1.03	1.00	0.98	1.02	0.99	0.98	1.02	0.99	0.97	1.01	0.99	0.97	0.96
	0.70	1.07	1.03	1.01	1.05	1.02	1.00	1.04	1.02	1.00	1.03	1.01	1.00	0.98
	1.00	1.10	1.07	1.04	1.09	1.06	1.04	1.07	1.05	1.03	1.06	1.04	1.02	1.00
	1.25	1.13	1.09	1.07	1.11	1.08	1.06	1.09	1.06	1.04	1.07	1.05	1.03	1.02
	1.50	1.15	1.11	1.09	1.12	1.09	1.07	1.10	1.08	1.06	1.08	1.06	1.04	1.02
指	2.00	1.17	1.14	1.12	1.14	1.12	1.10	1.11	1.09	1.08	1.09	1.07	1.06	1.03
	2.50	1.19	1.16	1.14	1.16	1.13	1.12	1.12	1.11	1.09	1.09	1.08	1.07	1.04
	3.00	1.21	1.18	1.16	1.17	1.15	1.13	1.13	1.12	1.10	1.10	1.09	1.08	1.05
	4.00	1.22	1.20	1.18	1.18	1.16	1.15	1.14	1.13	1.12	1.11	1.10	1.09	1.06
	5.00	1.24	1.22	1.20	1.19	1.18	1.16	1.15	1.14	1.13	1.11	1.10	1.09	1.06
数	7.00	1.25	1.24	1.22	1.20	1.19	1.18	1.16	1.15	1.14	1.12	1.11	1.10	1.07
	10.00	1.26	1.25	1.24	1.21	1.20	1.19	1.16	1.16	1.15	1.12	1.12	1.11	1.07