



配光特性

図番 YL220042



カタログ番号	J585AN
使用ランプ	
器具光束	1274.0 lm <small>1.000</small>
最大光度	3193 cd
1 / 2 ビーム角	
A 断面	34.00°
C 断面	
B 断面	

	角度	光度
	0°	3193
	10°	2580
	20°	1210
	30°	317
	40°	52
	50°	20
	60°	16
	70°	15
	80°	12
	90°	11
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

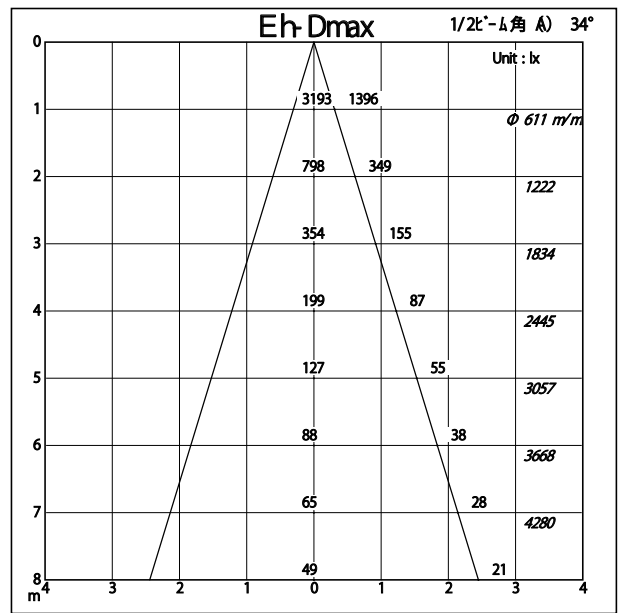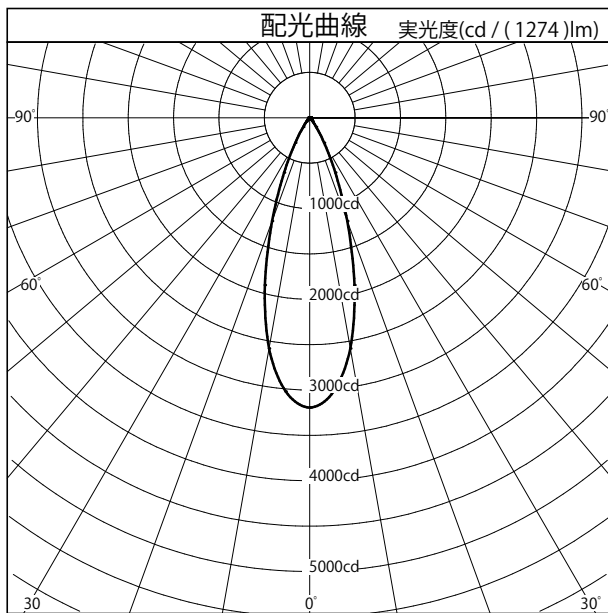

照明率表		平均照度=台数*照明率*保守率* 1274 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.76	0.72	0.69	0.76	0.71	0.69	0.75	0.71	0.68	0.74	0.71	0.68	0.67
	0.70	0.85	0.80	0.77	0.84	0.80	0.77	0.83	0.79	0.76	0.82	0.79	0.76	0.75
	1.00	0.93	0.88	0.85	0.91	0.87	0.84	0.90	0.86	0.84	0.88	0.85	0.83	0.81
	1.25	0.97	0.93	0.89	0.95	0.91	0.88	0.93	0.90	0.87	0.91	0.88	0.86	0.84
	1.50	1.00	0.96	0.93	0.98	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.87
指	2.00	1.04	1.00	0.97	1.01	0.98	0.95	0.98	0.96	0.94	0.96	0.94	0.92	0.90
	2.50	1.07	1.03	1.01	1.03	1.01	0.98	1.00	0.98	0.96	0.98	0.96	0.94	0.92
	3.00	1.09	1.06	1.03	1.05	1.02	1.00	1.02	1.00	0.98	0.99	0.97	0.96	0.93
	4.00	1.11	1.09	1.06	1.07	1.05	1.03	1.03	1.02	1.00	1.00	0.99	0.98	0.95
	5.00	1.13	1.11	1.09	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	0.99	0.96
数	7.00	1.15	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	0.97
	10.00	1.16	1.15	1.14	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.02	0.98