



# 配光特性

図番 YL210086



カタログ番号	J573BN
使用ランプ	
器具光束	1179.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	00.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	708
10°	727
20°	840
30°	880
40°	747
50°	506
60°	289
70°	174
80°	104
90°	46
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

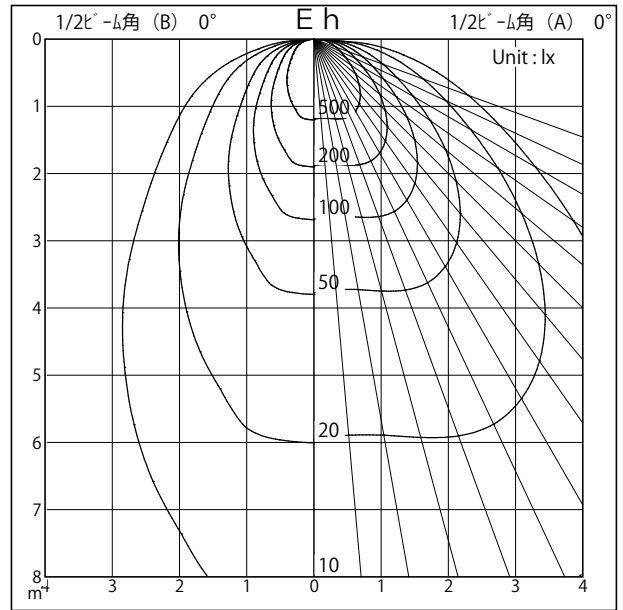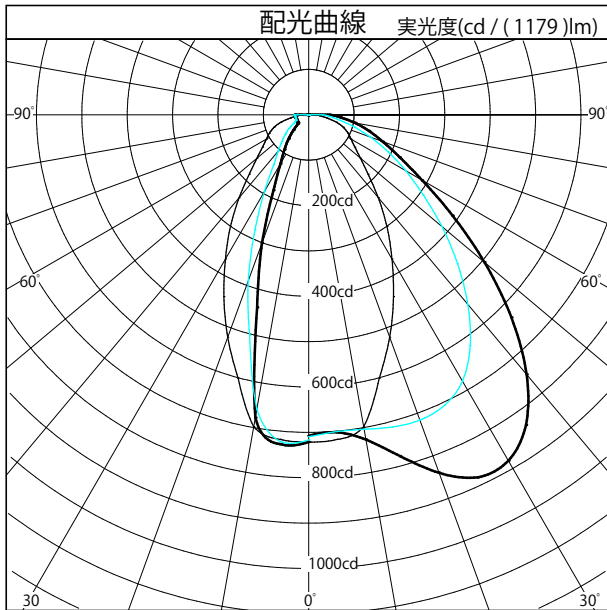

(m)	壁面照度分布						単灯
	0.50	1.00	1.50	2.00	2.50	3.00	(m)
0.50	173	117	42	13	5	2	1
1.00	223	147	60	22	9	4	2
1.50	144	111	56	25	11	5	3
2.00	79	67	42	22	11	6	3
2.50	44	40	29	18	10	6	3
3.00	26	24	19	14	9	5	3
3.50	16	16	13	10	7	5	3

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

(m)	連灯		
	0.50		
0.50	272	269	272
1.00	369	353	369
1.50	289	288	289
2.00	197	198	197
2.50	134	134	134
3.00	94	94	94
3.50	69	69	69

単位: lx (m)