



配光特性

図番 YL210087



カタログ番号	J573CN
使用ランプ	
器具光束	1244.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	747
10°	767
20°	886
30°	929
40°	789
50°	534
60°	305
70°	184
80°	110
90°	48
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

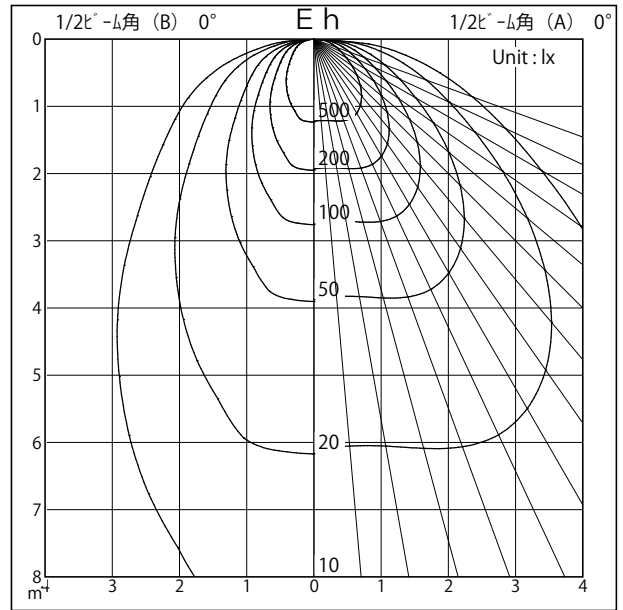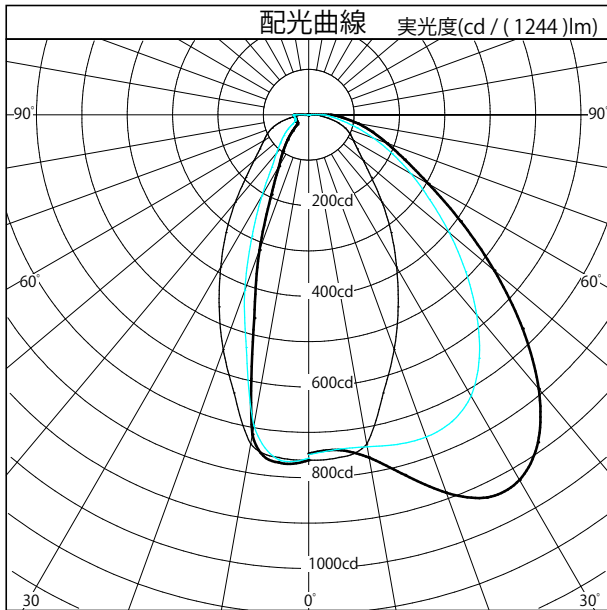

(m)	壁面照度分布						単灯
	0.50	1.00	1.50	2.00	2.50	3.00	(m)
0.50	183	124	44	14	5	3	1
1.00	236	156	63	24	9	4	2
1.50	153	117	59	26	12	5	3
2.00	83	71	44	24	12	6	3
2.50	46	42	30	19	11	6	4
3.00	27	26	20	14	9	6	3
3.50	17	17	14	11	7	5	3

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

(m)	連灯		
	0.50		
0.50	287	284	287
1.00	389	372	389
1.50	305	304	305
2.00	208	209	208
2.50	141	142	141
3.00	99	100	99
3.50	73	73	73

単位: lx (m)